


## ANTENNAS | OMNI-600 SERIES

# OMNI-DIRECTIONAL, 2X2 MIMO LTE ANTENNA

LTE, 410 – 3800 MHz, 6.2 dBi

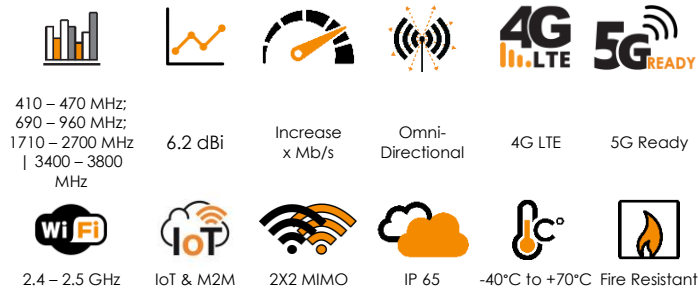

- **2X2 MIMO high performance omni-directional antenna**
- **Consistent gain over a wide frequency band**
- **Increased connectivity stability**
- **Excellent broadband quality antenna**
- **Vandal and water-resistant enclosure**



APPLICATION AREAS

## Product Overview

The OMNI-600 is a unique new design with improved 2x2 MIMO electrical performance. The ultra-wide band covers all contemporary operating frequencies with excellent balanced gain across all frequencies. Higher frequencies are not compromised, and the antenna design allows Poynting to have superior pattern control over the entire frequency range, making the OMNI-600 a true high performance omni-directional antenna. The OMNI-600 guarantees signal reception almost everywhere, making it usable in all parts of the world. Poynting Antennas achieves this through new antenna configuration using multiple dipoles and a unique (patented) feed network. The antenna is future proof as it covers the 450 MHz frequency and 3.5 GHz CBRs band which is gaining popularity in various regions and countries.

## Features

- Medium gain omni-directional antenna
- 2X2 MIMO capability
- Robust and weather resistant
- Operational in the 2.4 – 2.5 GHz Wi-Fi band
- Lightweight


## Application Areas

- Machine to machine (M2M)
- Poor data signal reception (indoor or outdoor)
- Slow data transmission connection
- Wi-Fi applications
- Unstable connection
- Increases system transmission reliability
- High-end industrial grade router applications
- Mobile offices




## Frequency Bands

The OMNI-600 is a cellular / IoT antenna that works from 410 – 470 MHz | 690 – 960 MHz | 1710 – 2700 MHz | 3400 – 3800 MHz

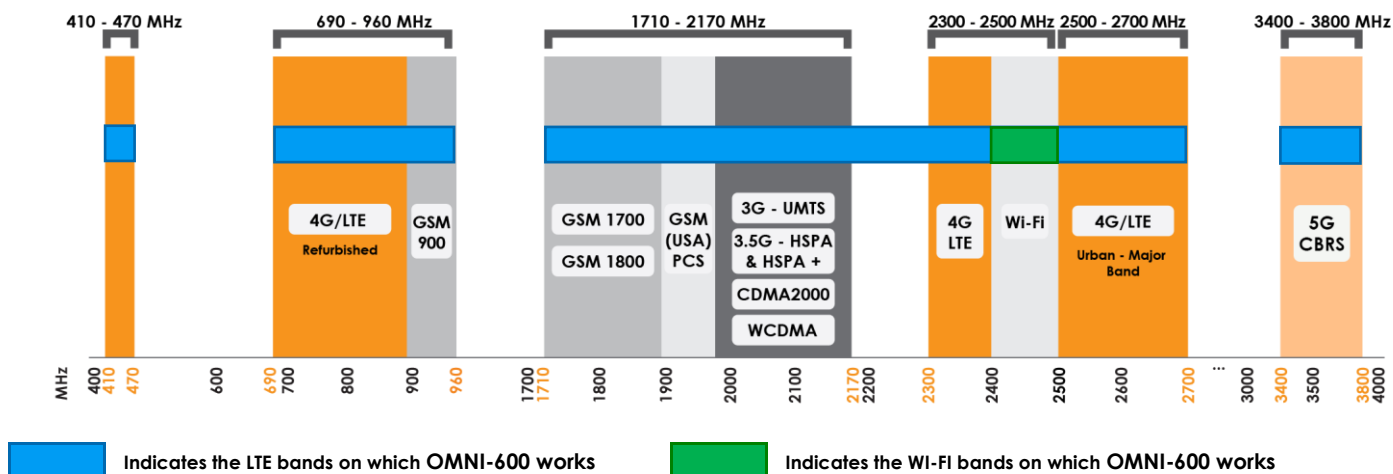

## Antenna Overview

	
Ports	2
SISO / MIMO	2x2 MIMO
Frequency Bands	410 – 3800 MHz
Polarisation	Linear Vertical
Peak Gain	6.2 dBi
Coax Cable Type	Twin HDF 195
Coax Cable Length	5m
Connector Type	SMA (M)

## Electrical Specifications

Frequency bands:	410 – 470 MHz
	690 – 960 MHz
Gain (max):	1710 – 2700 MHz
	3400-3800 MHz
	1 dBi @ 410-470 MHz
	2 dBi @ 690-960 MHz
	6.2 dBi @ 1710-2700 MHz
VSWR Port 1 & 2:	2 dBi @3400-3800 MHz
	≤3:1 over 90% of the band
Feed power handling:	10 W
Input impedance:	50 Ohm (nominal)
Coax cable loss:	0.250 dB/m @ 400 MHz
	0.385 dB/m @ 900 MHz
	0.565 dB/m @ 1800 MHz
	0.666 dB/m @ 2400 MHz
	0.788 dB/m @ 3000 MHz
DC short:	Yes

## Product Box Contents

Antenna:	A-OMNI-0600-V1-02
Mounting bracket:	Pole up to 50mm diameter
	Wall and pole mount stainless steel bracket

## Ordering Information

Commercial name:	OMNI-600-02
Order product code:	A-OMNI-0600-V1-02
EAN number:	6009880915101



## Mechanical Specifications

Product dimensions (L x W)	646 mm x Ø71 mm excluding bracket
Packaged dimensions:	700 mm x 150 mm x 100 mm
Weight:	0.8 kg
Packaged weight:	1.64 kg
Radome material:	ABS (Halogen Free)
Radome colour:	Pantone – Cool Gray (1C)
	RAL -7047
Mounting Type:	Wall/Pole mount

## Environmental Specifications, Certification & Approvals

Wind Survival:	≤160 km/h
Temperature Range (Operating):	-40°C to +70°C
Environmental Conditions:	Outdoor/Indoor
Water ingress protection ratio/standard:	IP 65
Salt Spray:	MIL-STD 810F/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +70°C
Enclosure Flammability Rating:	UL 94-HB
Impact resistance:	IK 08
Product Safety & Environmental:	Complies with CE and RoHS standards

## Antenna Performance Plots

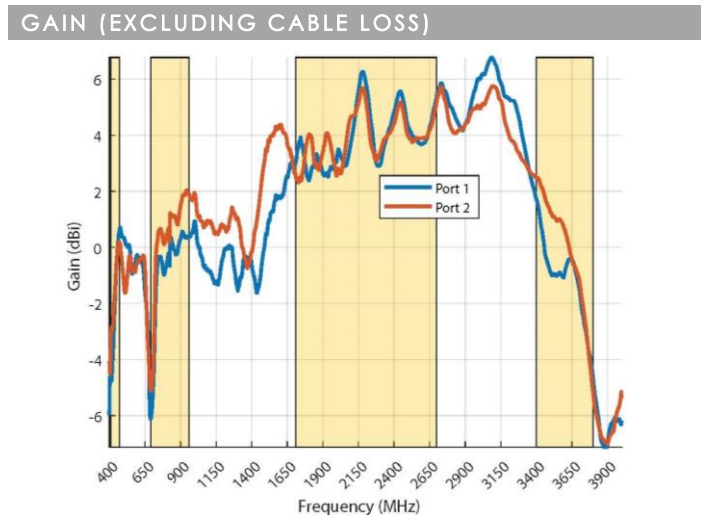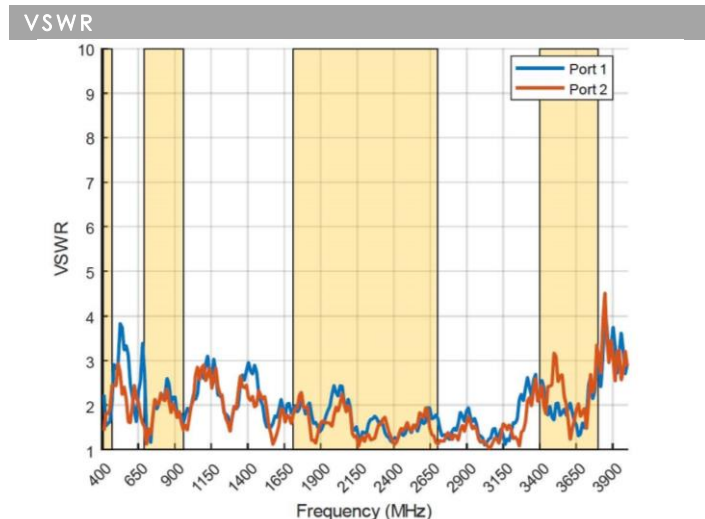

### Voltage Standing Wave Ratio (VSWR)

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-600 delivers superior performance across all bands with a VSWR of <3:1 or better across 90% of the bands.

### Gain\* in dBi

6.2 dBi is the peak gain across all bands from 410 – 3800 MHz.

Gain @ 410 – 470 MHz: 1 dBi


Gain @ 690 – 960 MHz: 2 dBi

Gain @ 1710 – 2700 MHz: 6.2 dBi


Gain @ 3400 – 3800 MHz: 2 dBi

*\*Antenna gain measured with polarisation aligned standard antenna*

## Technical Drawings

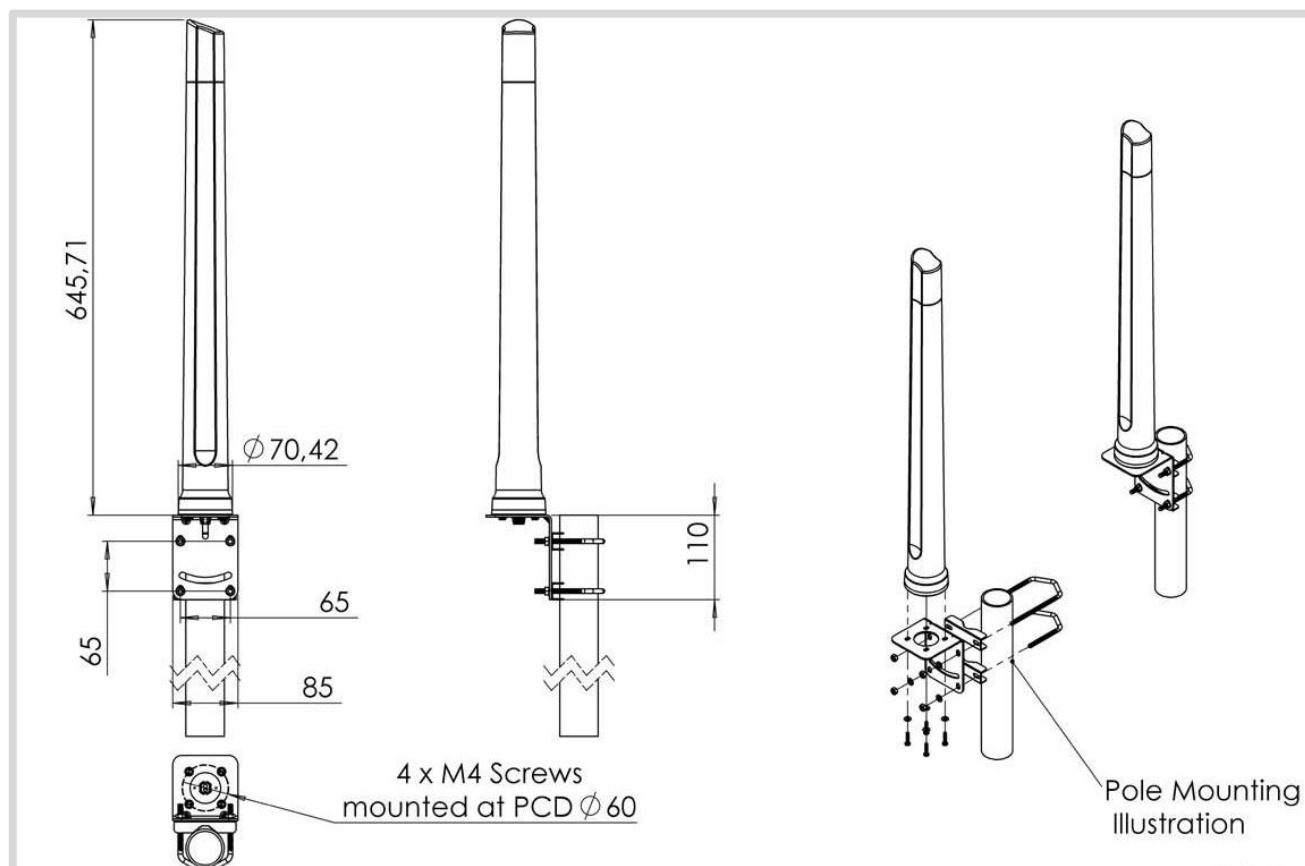


## Radiation Patterns – Port 1

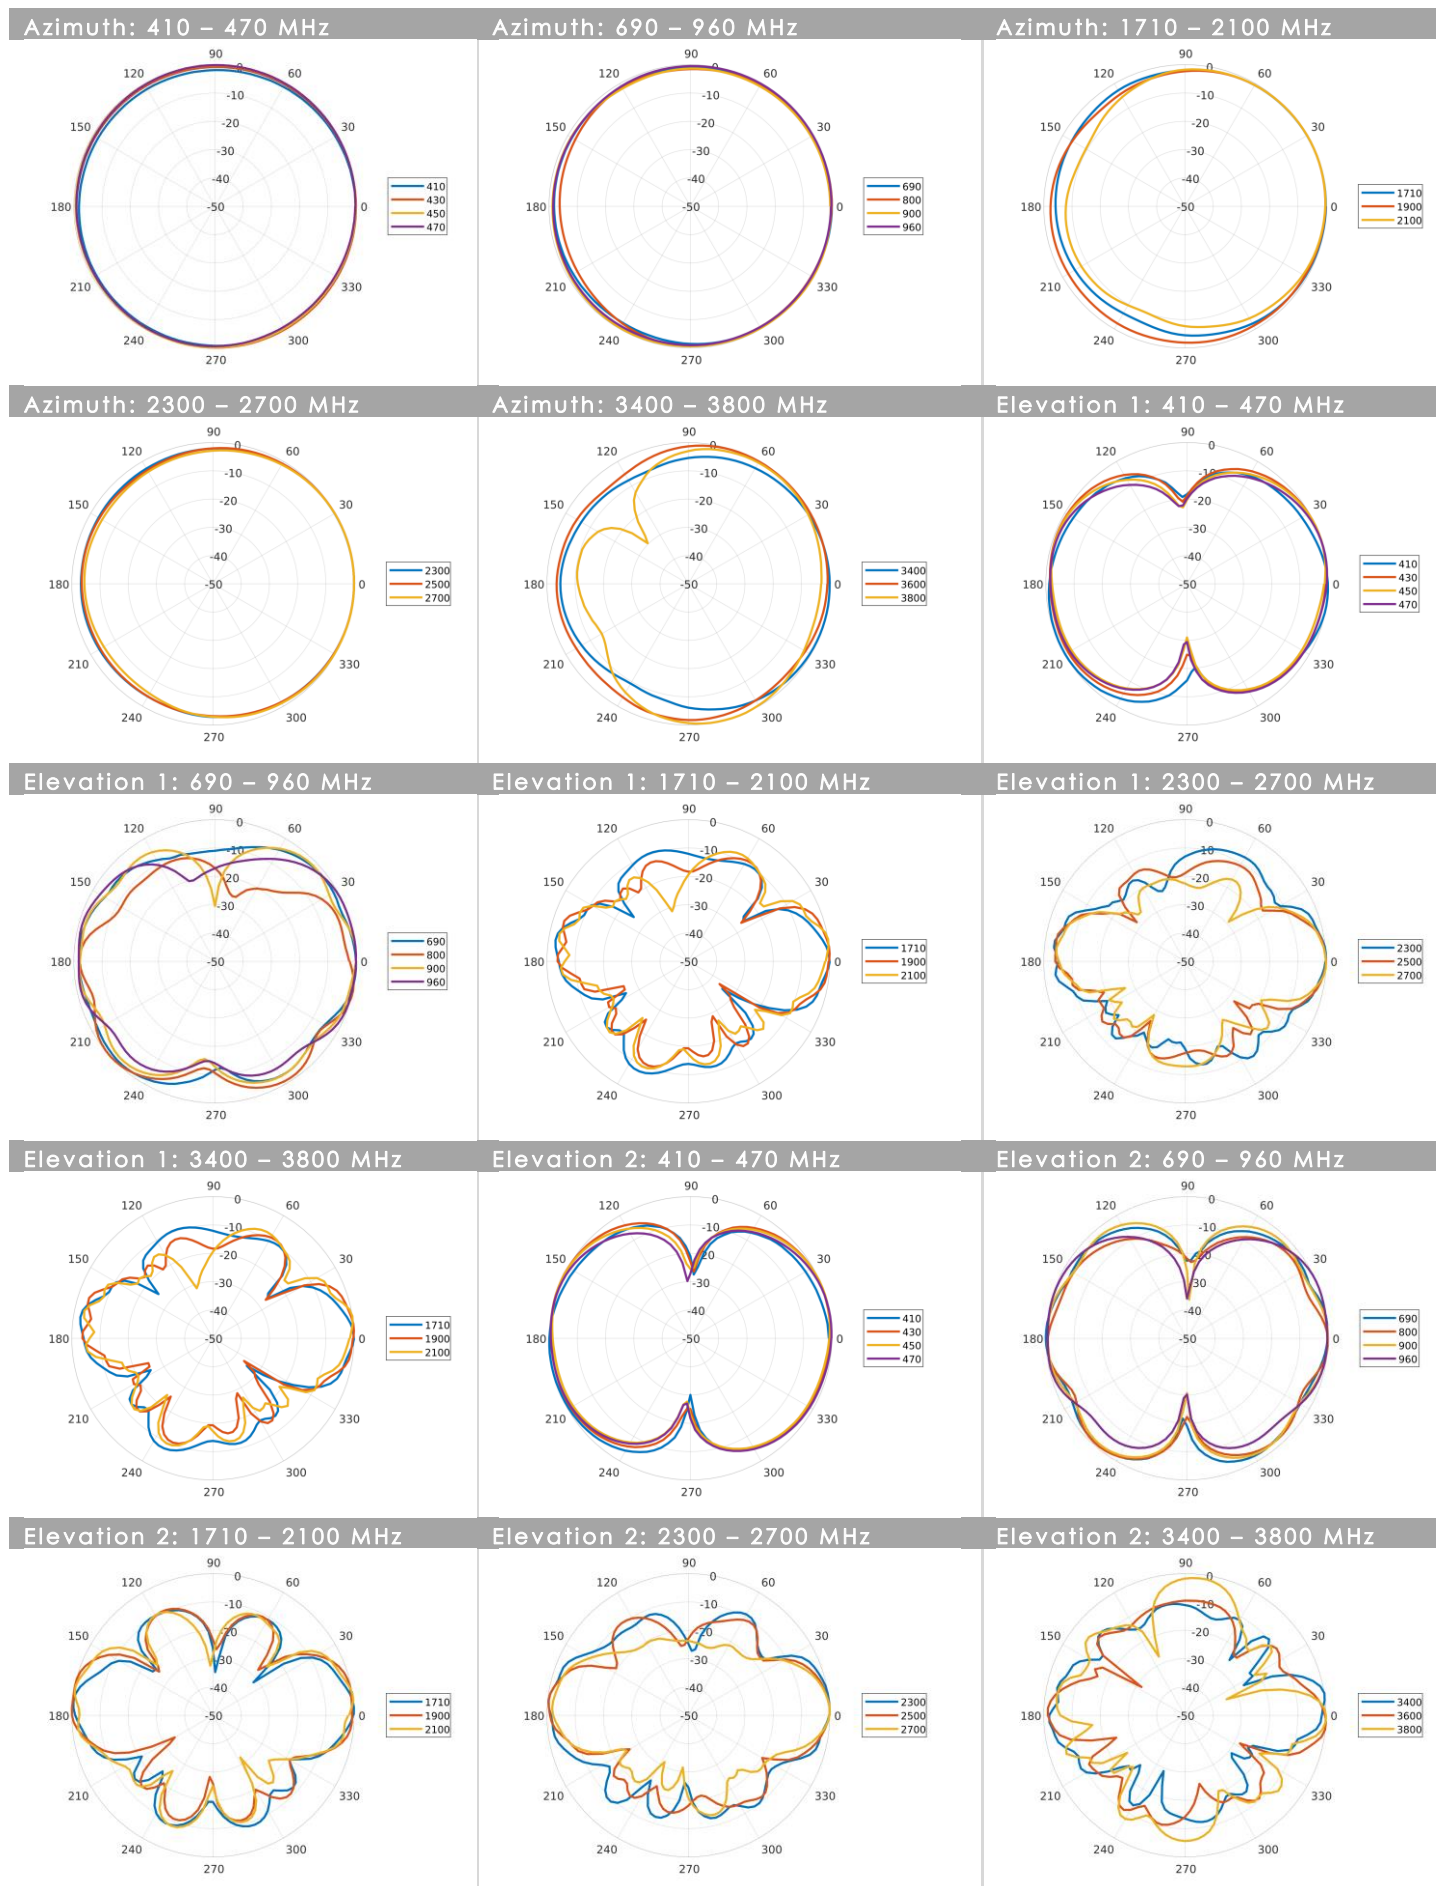




## Radiation Patterns – Port 2

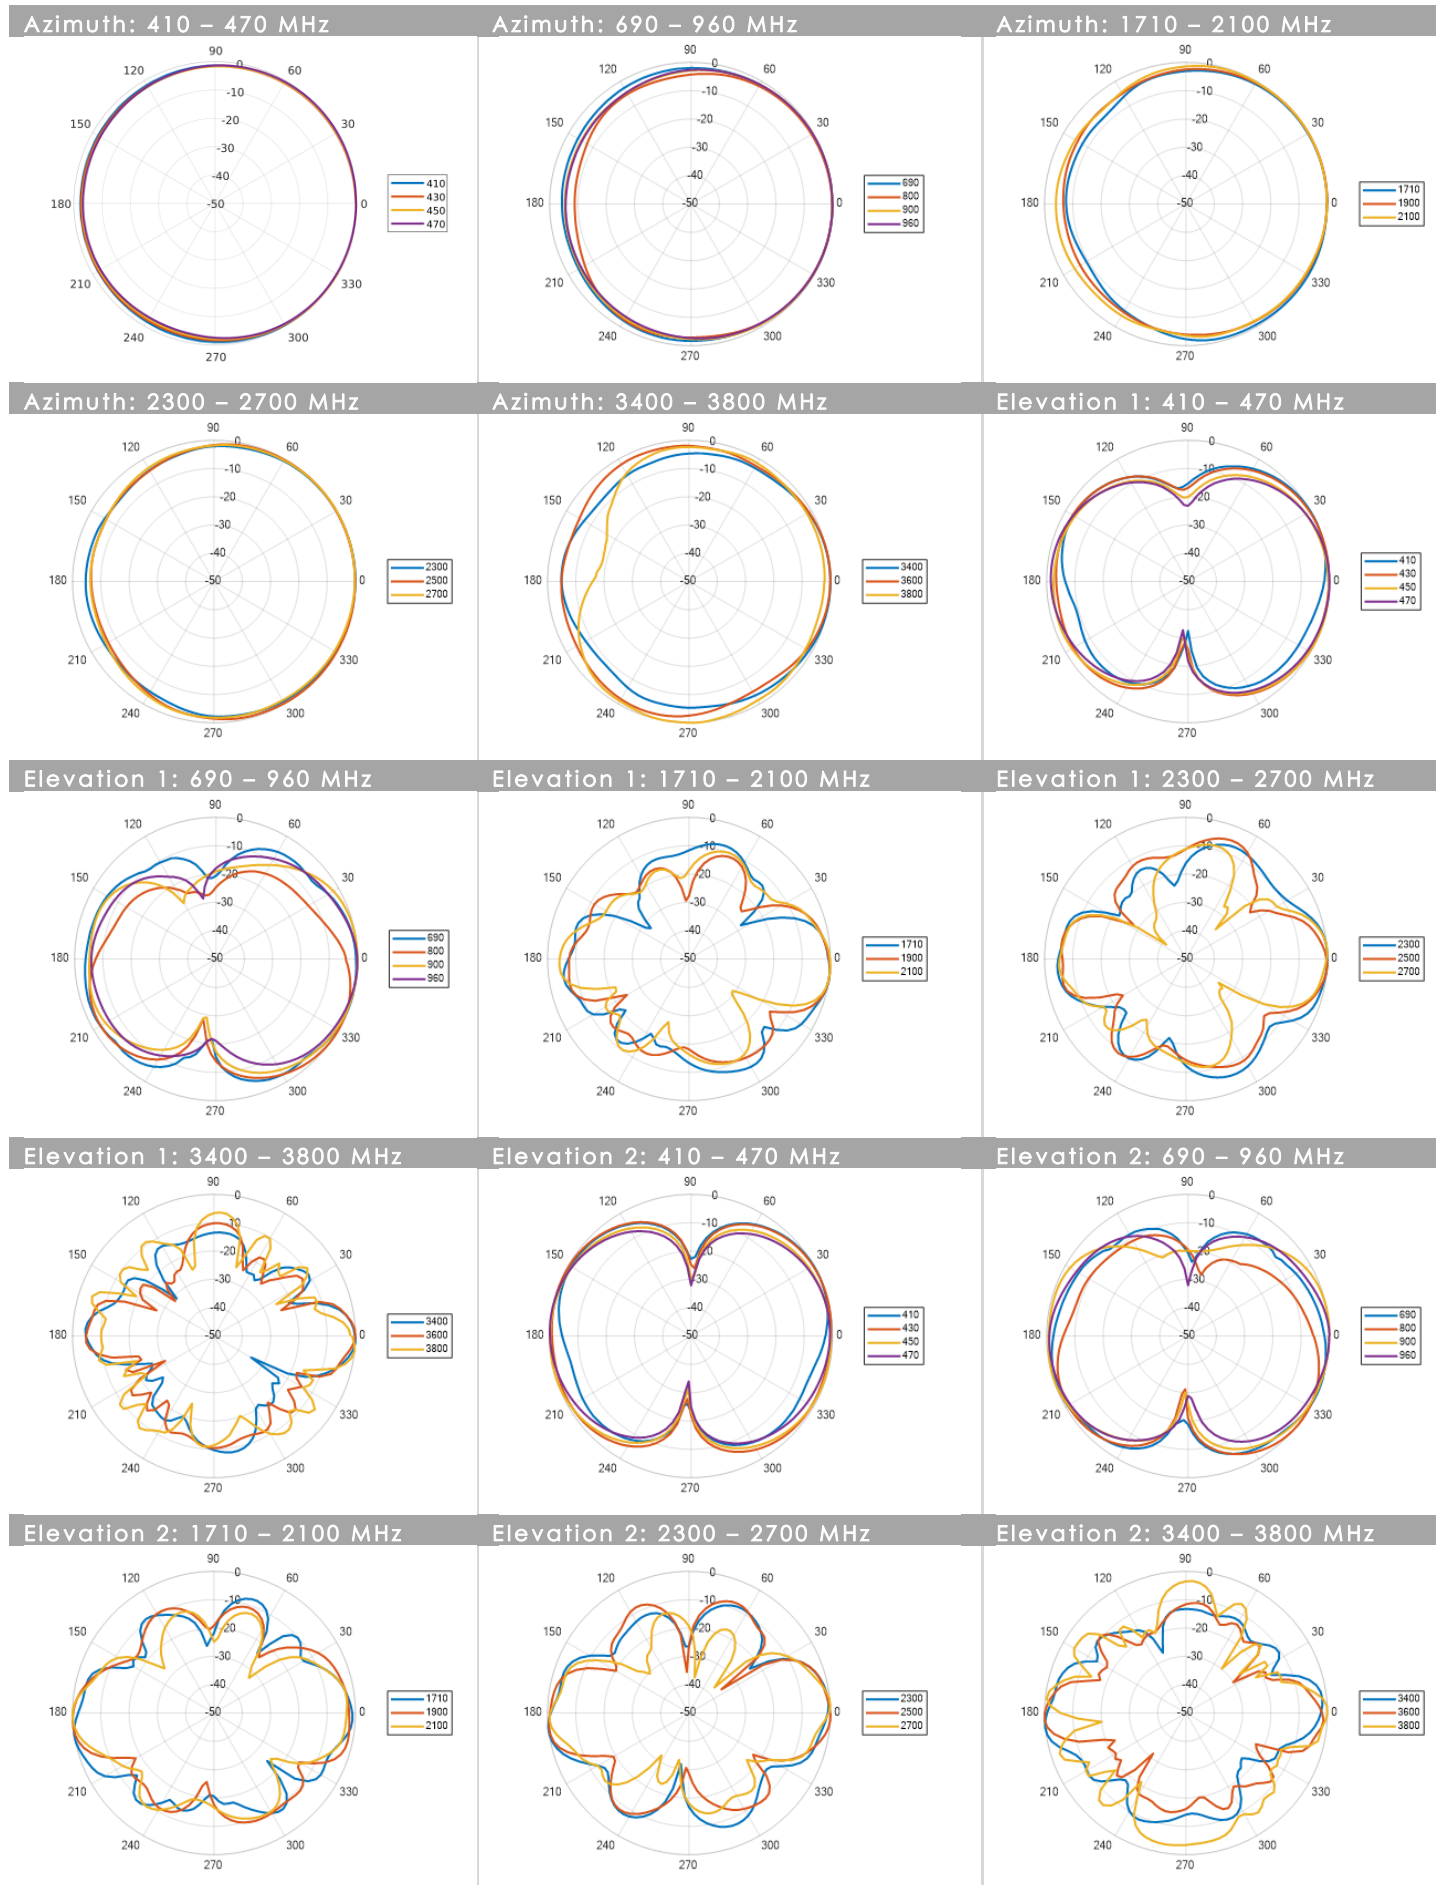


## Mounting Options

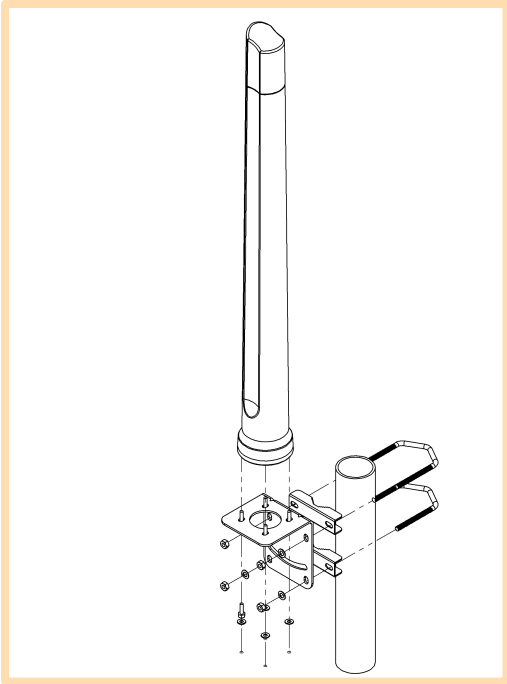

### Pole Mount

Wall/pole mount bracket included

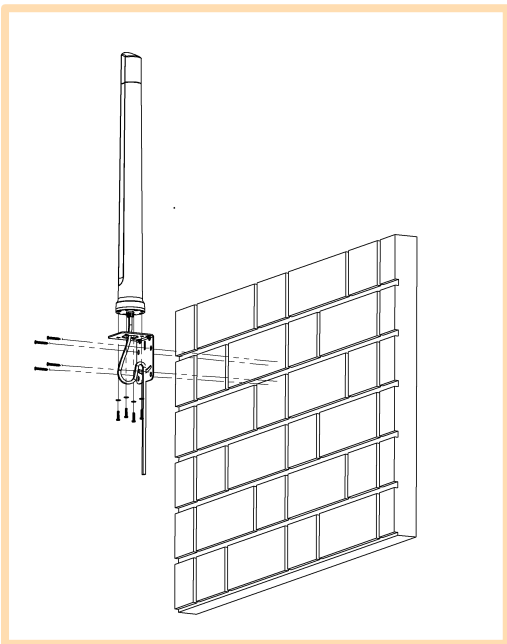

### Wall Mount

Wall/pole mount bracket included

---

### Additional Accessories

Extension Cables: Up to 15m HDF 195  
Various connectors available  
Installation poles and brackets available

See accessories technical specifications on [www.poynting.tech](http://www.poynting.tech)

---

### Contact Poynting

#### Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park  
Landmarks Avenue,  
Samrand, 0157  
South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [sales@poynting.co.za](mailto:sales@poynting.co.za)

#### Poynting Europe

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 208026538

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)