





eniroFoam

**Foam**

**FIRE EXTINGUISHER**  
6 LITRE OF FIRE EXTINGUISHING AGENT  
27 A 144 B

For use on burning liquid fires (Class B) and wood, paper, textile and similar Class A fires

Use upright.  
Pull out safety pin.

Free hose.  
Aim nozzle  
at base of fire.

Squeeze handles.



Can be used for extinguishing of electric devices up to 1000V - keep the distance min. 1m. Depressure and recharge after any use. Check weight at least once a year. Protected from frost.

**COMMANDER EDGE**

Commander Ltd. 50 Alfred Owen Way, Portlough Industrial Estate, Dublin 15, Ireland  
Manufactured by: COMMANDER S.p.A. - 16122 Santhia (Genova) Italy

COMMANDER



# Contents

|           |                                  |
|-----------|----------------------------------|
| <b>2</b>  | PFAS-free                        |
| <b>4</b>  | Commander Fire Extinguishers     |
| <b>16</b> | CommanderEDGE Fire Extinguishers |
| <b>32</b> | Contempo Fire Extinguishers      |
| <b>34</b> | Trolleys and Covers              |
| <b>36</b> | Stands                           |
| <b>38</b> | Cabinets                         |
| <b>40</b> | Fire Blankets                    |
| <b>42</b> | Signs                            |
| <b>46</b> | Alarms                           |
| <b>48</b> | Toolkit Essentials               |
| <b>50</b> | Service Tools                    |
| <b>52</b> | Services                         |
| <b>53</b> | Recycling                        |





# The Green Range



**The Green Range has now extended to a fully PFAS-free (Perfluoroalkyl and Polyfluoroalkyl Substances) solution of portable fire extinguishers across the Commander and CommanderEDGE portfolio. Receive the same level of quality, performance, and innovation that you have come to know of our products, but now, fluorine-free.**

The Green Crosshair is now a permanent feature across the Commander and CommanderEDGE range of fire extinguishers, signifying their PFAS-free contents. It is conveniently placed within the certifications section of the cylinder for ease of reference.







# Water

**FIRE EXTINGUISHER**

**6 LITRE WATER**

**21 A**



**Use upright  
Pull out safety pin**



**Free hose  
Aim nozzle  
at base of fire**



**Squeeze handles**



**WARNING:**  
Do not use on liquid fires  
Depressure and recharge after any use  
Check weight at least once a year  
Protect from frost

For use on wood, paper, textile and similar  
Class A fires.  
Tested to BS EN3-7 . Safe for inadvertent use on electrical fires.

## COMMANDER

CheckFire Ltd, Caerphilly, CF83 3HU



**The trusted go-to brand for fire extinguishers in the UK, Commander offers a comprehensive range of high-performance, industry-compliant fire extinguishers.**

Now PFAS-free across the entire range, Commander is proud to boast one of the widest ranges of options available on the market today and time has proven these portable fire extinguishers as the dependable choice for almost any installation requirement - with reliable performance guaranteed.

*\* Note: Some product imagery is subject to change in the near future and will be updated accordingly*





# COMMANDER

## Water Fire Extinguishers

A popular choice for Class A fires (combustible materials), Commander Water Fire Extinguishers work by cooling the fuel and ensuring it burns at a much slower pace until the fire is extinguished. With ease of maintenance and PFAS-free contents, it's easy to see why our water fire extinguishers are the preferred choice for many businesses.

### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty\*\*

*\*Selected units only*

*\*\*See our terms and conditions*





**3ltr  
Water**

CODE  
**FX-WWA-003-DCF**

CAPACITY  
**3LTR**

FIRE RATING  
**13A**

EXTINGUISHER MEDIUM  
**WATER**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**6ltr  
Water**

CODE  
**FX-PWA-006-DCF**

CAPACITY  
**6LTR**

FIRE RATING  
**21A**

EXTINGUISHER MEDIUM  
**WATER**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9ltr  
Water**

CODE  
**FX-PWA-009-DCF**

CAPACITY  
**9LTR**

FIRE RATING  
**27A**

EXTINGUISHER MEDIUM  
**WATER**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





## Foam Fire Extinguishers

Specified for installation in settings where there is a Class B (flammable liquids) risk in enclosed spaces, the new Commander range of Fluorine-Free Foam Fire Extinguishers work by creating a dense foam blanket that rapidly spreads above the fuel surface, suppressing the oxygen supply which quickly extinguishes the fire. This also creates a cooling effect that prevents reignition.


### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty\*\*

*\*Select units only*

*\*\*See our terms and conditions*



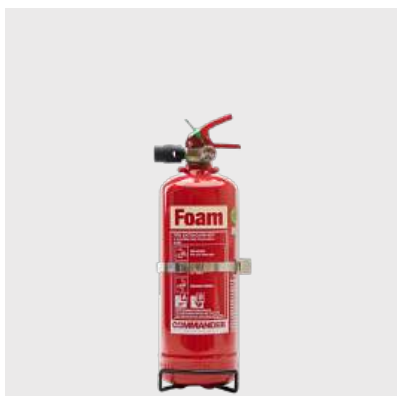

**2ltr  
Foam**

CODE  
**FX-FFF-002-ACF**

CAPACITY  
**2LTR**

FIRE RATING  
**5A 34B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**3ltr  
Foam**

CODE  
**FX-FFF-003-ACF**

CAPACITY  
**3LTR**

FIRE RATING  
**13A 55B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**6ltr  
Foam**

CODE  
**FX-FFF-006-DCF**

CAPACITY  
**6LTR**

FIRE RATING  
**21A 144B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9ltr  
Foam**

CODE  
**FX-FFF-009-DCF**

CAPACITY  
**9LTR**

FIRE RATING  
**27A 183B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





## Powder Fire Extinguishers

The Commander Powder range of PFAS-free fire extinguishers are extremely versatile. Suitable for use on Class A (combustible materials), Class B (flammable liquids) in open spaces, and Class C (flammable gas) fires, it's for this reason they're known as 'ABC' extinguishers. Powder fire extinguishers smother fires by producing a thick barrier between the fuel and the source of oxygen.

### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty\*\*

*\*Selected units only*

*\*\*See our terms and conditions*





**1kg  
Powder**

CODE  
**FX-PWD-001-DCF**

CAPACITY  
**1KG**

FIRE RATING  
**8A 34B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**2kg  
Powder**

CODE  
**FX-PWD-002-DCF**

CAPACITY  
**2KG**

FIRE RATING  
**13A 70B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**3kg  
Powder**

CODE  
**FX-PWD-003-DCF**

CAPACITY  
**3KG**

FIRE RATING  
**13A 89B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**4kg  
Powder**

CODE  
**FX-PWD-004-DCF**

CAPACITY  
**4KG**

FIRE RATING  
**21A 89B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**6kg  
Powder**

CODE  
**FX-PWD-006-DCF**

CAPACITY  
**6KG**

FIRE RATING  
**27A 144B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9kg  
Powder**

CODE  
**FX-PWD-009-DCF**

CAPACITY  
**9KG**

FIRE RATING  
**34A 233B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





## COMMANDER

### CO2 Fire Extinguishers

As well as being suitable for Class B (flammable liquid) fires, CO2 fire extinguishers are the ideal choice for installation in electrical fire risk settings because it limits damage to electrical equipment or machinery via its non-conductive properties. They work by starving the fire of oxygen, ensuring the fire no longer burns. The 2kg and 5kg Commander CO2 are among the finest on the market, while the Commander Renovate range are a cost effective and economical solution.

#### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*\*\*
- Supplied with safe horn\*\*

*\*Selected units only*

*\*\*See our terms and conditions*

*\*\*\*Horns not included with Commander Renovates and will need to be ordered separately*





**2kg CO2  
Steel**

CODE  
**FX-CO2-002-DCF**

CAPACITY  
**2KG**

FIRE RATING  
**34B**

EXTINGUISHER MEDIUM  
**CO2**

WORKING PRESSURE  
**56 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**5kg CO2  
Steel**

CODE  
**FX-CO2-005-DCF**

CAPACITY  
**5KG**

FIRE RATING  
**70B**

EXTINGUISHER MEDIUM  
**CO2**

WORKING PRESSURE  
**56 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**2kg CO2  
Renovated**

CODE  
**FX-CO2-002-ECF**

CAPACITY  
**2KG**

FIRE RATING  
**34B**

EXTINGUISHER MEDIUM  
**CO2**

WORKING PRESSURE  
**56 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**ALUMINIUM**



**5kg CO2  
Renovated**

CODE  
**FX-CO2-005-ECF**

CAPACITY  
**5KG**

FIRE RATING  
**70B**

EXTINGUISHER MEDIUM  
**CO2**

WORKING PRESSURE  
**56 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**ALUMINIUM**





## Wet Chemical Fire Extinguishers

A wet chemical fire extinguisher is specifically designed for use on Class F fires (cooking oils and fats), making it the ideal solution for the demands of commercial kitchen and canteen environments. This type of extinguisher works by creating a layer of foam on the burning oil or fat, stopping the supply of oxygen so the fire isn't fueled any further. The new Commander 6ltr Wet Chemical is not only PFAS free, the unit also now features a bell bottom hose, allowing a Class F fire to be extinguished much more effectively.

### Features

- Kitemarked and manufactured to BS EN3
- PFAS-free
- New bell-bottom hose
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*

*\*See our terms and conditions*





**6ltr  
Wet Chemical**

CODE  
**FX-WCH-006-DCF**

CAPACITY  
**6LTR**

FIRE RATING  
**13A 75F**

EXTINGUISHER MEDIUM  
**WET CHEMICAL**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**









**The home of innovation and elite performing fluorine-free fire extinguishers, the CommanderEDGE range boasts a number of reliable high performing and extensively tested fire extinguishers.**

The range is fully Kitemarked by BSI and is the choice of the professional installer with its mix of performance, quality and value. CommanderEDGE is also home to brand exclusive fire extinguishers, including the enviroFoam Fluorine-Free Foam range and the LFX Lithium-ion Battery Fire Extinguisher range.

*\* Note: Some product imagery is subject to change in the near future and will be updated accordingly*



## Water Fire Extinguishers

Ideal for Class A fire risk areas (those featuring combustible materials), water-based extinguishers remain a popular choice for many businesses. Directed at the base of the fire, this extinguisher releases water to cool the fuel, ensuring it burns at a slow pace until completely extinguished. The CommanderEDGE Water Fire Extinguisher range features a variety of PFAS-free options; from the new enviroWater range, to a Water Mist, the range prioritises high performance and superb quality.

### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*\*

*\*Selected units only*

*\*\*See our terms and conditions*



### 3ltr Water

CODE  
**FX-FFW-003-CCF**

CAPACITY  
**3LTR**

FIRE RATING  
**13A**

EXTINGUISHER MEDIUM  
**WATER + ADDITIVE**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



### 6ltr Water

CODE  
**FX-FFW-006-CCF**

CAPACITY  
**6LTR**

FIRE RATING  
**27A**

EXTINGUISHER MEDIUM  
**WATER + ADDITIVE**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



### 9ltr Water

CODE  
**FX-FFW-009-CCF**

CAPACITY  
**9LTR**

FIRE RATING  
**43A**

EXTINGUISHER MEDIUM  
**WATER + ADDITIVE**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



### 6ltr Water Mist

CODE  
**FX-WMS-006-CCF**

CAPACITY  
**6LTR**

FIRE RATING  
**13A 40F**

EXTINGUISHER MEDIUM  
**WATER**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



### 6ltr Low Freeze Additive

CODE  
**FX-WLF-006-DCF**

CAPACITY  
**6LTR**

FIRE RATING  
**13A**

EXTINGUISHER MEDIUM  
**WATER + ANTI FREEZE  
ADDITIVE**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**-10°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



### 9ltr Low Freeze Additive

CODE  
**FX-WLF-009-DCF**

CAPACITY  
**9LTR**

FIRE RATING  
**21A**

EXTINGUISHER MEDIUM  
**WATER + ANTI FREEZE  
ADDITIVE**

WORKING PRESSURE  
**12 BAR @ 20°C**

TEMPERATURE RANGE  
**-10°C to +60°C**

CYLINDER MATERIAL  
**STEEL**









**3ltr  
Foam**

CODE  
**FX-FFF-003-CCF**

CAPACITY  
**3LTR**

FIRE RATING  
**13A 70B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**6ltr  
Foam**

CODE  
**FX-FFF-006-CCF**

CAPACITY  
**6LTR**

FIRE RATING  
**27A 144B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9ltr  
Foam**

CODE  
**FX-FFF-009-CCF**

CAPACITY  
**9LTR**

FIRE RATING  
**34A 183B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**15 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





## Powder Fire Extinguishers

The CommanderEDGE range of Powder Fire Extinguishers are an extremely versatile option, suitable for use on Class A (combustible materials), Class B (flammable liquids) in open spaces, and Class C (flammable gas) fires. It's for this reason they're known as 'ABC' fire extinguishers. The extinguisher smothers fires by producing a thick barrier between the fuel and the source of oxygen.

### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved\*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*\*

*\*Selected units only*

*\*\*See our terms and conditions*





**6kg  
Powder**

CODE  
**FX-PWD-006-CCF**

CAPACITY  
**6KG**

FIRE RATING  
**43A 233B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9kg  
Powder**

CODE  
**FX-PWD-009-CCF**

CAPACITY  
**9KG**

FIRE RATING  
**55A 233B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





## CO2 Fire Extinguishers

The CommanderEDGE Aluminium CO2 Fire Extinguisher range are suitable for Class B (flammable liquid) fires, as well as Electrical fire risk settings as they limit damage to electrical equipment or machinery due to their non-conductive properties. They work by starving the fire of oxygen ensuring the fire no longer burns. The CommanderEDGE CO2 2kg squat bodies allow for ease of handling, while the 5kg unit offers a high performance 70B fire rating.

### Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Supplied with safe horn
- Five-year warranty\*

*\*See our terms and conditions*



**2kg**  
**CO2 Aluminium**

---

CODE  
**FX-COA-002-DCF**

---

CAPACITY  
**2KG**

---

FIRE RATING  
**34B**

---

EXTINGUISHER MEDIUM  
**CO2**

---

WORKING PRESSURE  
**56 BAR @ 20°C**

---

TEMPERATURE RANGE  
**-30°C to +60°C**

---

CYLINDER MATERIAL  
**ALUMINIUM**



**5kg**  
**CO2 Aluminium**

---

CODE  
**FX-COA-005-DCF**

---

CAPACITY  
**5KG**

---

FIRE RATING  
**70B**

---

EXTINGUISHER MEDIUM  
**CO2**

---

WORKING PRESSURE  
**56 BAR @ 20°C**

---

TEMPERATURE RANGE  
**-30°C to +60°C**

---

CYLINDER MATERIAL  
**ALUMINIUM**







## Wet Chemical Fire Extinguishers

Designed specifically for tackling Class F fires (cooking oils and fats), the CommanderEDGE 3ltr Wet Chemical Fire Extinguisher is the ideal solution for canteen and commercial kitchen environments. The new CommanderEDGE 3ltr Wet Chemical is now Kitemarked to BS EN3, PFAS-free and is an exceptional powerhouse for its size, boasting an 8A 75F fire rating

### Features

- Kitemarked and manufactured to BS EN3
- PFAS-free
- New bell-bottom hose
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*

*\*See our terms and conditions*



**3ltr**  
**Wet Chemical**

---

CODE  
**FX-WCH-003-DCF**

---

CAPACITY  
**3LTR**

---

FIRE RATING  
**8A 75F**

---

EXTINGUISHER MEDIUM  
**WET CHEMICAL**

---

WORKING PRESSURE  
**12 BAR @ 20°C**

---

TEMPERATURE RANGE  
**+5°C to +60°C**

---

CYLINDER MATERIAL  
**STEEL**





**COMMANDER**EDGE

## LFX Lithium-ion Fire Extinguishers

The LFX range has been designed and developed in response to the rapidly growing use of lithium-ion batteries and their unique fire risks. Using a water-based agent that discharges as an endothermic foam, LFX breaks down the chain reaction in thermal runaway and cools the temperature of the batteries, absorbing significantly more heat than water alone. It also protects from secondary A-class fires, extinguishing any 'peripheral' fires potentially caused by exploding batteries.

### Features

- Kitemarked to BS EN3\*
- Manufactured to BS EN3
- NTA 8133 Certified\*\*
- MED and MER approved
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- LFX refills available
- Five-year warranty\*\*\*

\*Kitemark applies to Class A rating

\*\*NTA 8133 applies to 6ltr and 9ltr units only

\*\*\*See our terms and conditions





**3ltr  
LFX**

CODE  
**FX-LFX-003-ACF**

CAPACITY  
**3LTR**

FIRE RATING  
**13A**

EXTINGUISHER MEDIUM  
**LFX**

WORKING PRESSURE  
**20 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**6ltr  
LFX**

CODE  
**FX-LFX-006-ACF**

CAPACITY  
**6LTR**

FIRE RATING  
**27A**

EXTINGUISHER MEDIUM  
**LFX**

WORKING PRESSURE  
**20 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**



**9ltr  
LFX**

CODE  
**FX-LFX-009-ACF**

CAPACITY  
**9LTR**

FIRE RATING  
**34A**

EXTINGUISHER MEDIUM  
**LFX**

WORKING PRESSURE  
**20 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STEEL**





**BRIDGEHILL®**  
WE SIMPLY BLOCK FIRE

## EV Fire Blankets

Suitable for a range of applications, from standard size vehicles, to larger SUVs and industrial forklifts, the Bridgehill Fire Blanket range is the fastest and safest way to contain and extinguish a large-scale lithium-ion battery fire. CheckFire are proud to introduce Bridgehill fire blankets into the LFX range of Lithium-ion battery fire safety solutions.

### Features

- DIN SPEC 91489:2024-11 ready
- Suitable for electric vehicles and fossil fuel vehicles
- 1600°C short term exposure
- 1200°C long term exposure
- Made from Pyroxene with a proprietary coating
- 10 year warranty
- Supplied in air tight weather and chemical resistant bag



#### Car Standard Blankets

**CAR STANDARD -**  
FB-CAR-001-BGH  
6 X 8M

**CAR STANDARD XL -**  
FB-CAR-002-BGH  
8 X 10M

**CAR STANDARD TRAINING BLANKET -**  
FB-CAR-101-BGH  
6 X 8M



#### Forklift / Pallet Truck Blankets

**PALLET TRUCK -**  
FB-FKL-001-BGH  
5 X 5M

**FORK LIFT -**  
FB-FKL-002-BGH  
7 X 7M

**FORK LIFT TRAINING BLANKET -**  
FB-FKL-101-BGH  
7 X 7M



#### Lithium Blankets

**LITHIUM BLANKET SMALL -**  
FB-LIB-001-BGH  
1.8 X 1.8M

**LITHIUM BLANKET LARGE -**  
FB-LIB-002-BGH  
3 X 4M



#### Extreme Blankets

**EXTREME SMALL -**  
FB-EXT-001-BGH  
1.5 X 1.5M

**EXTREME MEDIUM -**  
FB-EXT-002-BGH  
3 X 3M

**EXTREME LARGE -**  
FB-EXT-003-BGH  
5 X 5M



#### Car Pro Blankets

**CAR PRO -**  
FB-CAR-003-BGH  
6 X 8M

**CAR PRO XL -**  
FB-CAR-004-BGH  
7.5 X 10M

**\* FOR USE BY TRAINED PROFESSIONALS ONLY**



#### Fire Cabinet

**CB-GBH-001-BLK**  
90 X 30 X 35CM





**The very finest interior finishes are beautifully researched and designed. Contempo provides stunning hand-finished extinguishers to complement the most exquisite interior - and nine litre models can be available on request.**

#### **Features**

- Manufactured to BS EN3
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty\*
- Super strong base skirt for protection
- Polyethylene internal lining (on water units)

*\*See our terms and conditions*

# Contempo Stainless Steel

With a superb highly polished finish, luxury stainless steel extinguishers are perfect for areas where appearance is important.



**2kg CO2  
Aluminium**

CODE  
**CX-CO2-002-DSS**

CAPACITY  
**2KG**

FIRE RATING  
**34B**

EXTINGUISHER MEDIUM  
**CO2**

WORKING PRESSURE  
**56 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**ALUMINIUM**

PRESSURING GAS  
**NITROGEN**



**6ltr Water  
Stainless Steel**

CODE  
**CX-PWA-006-DSS**

CAPACITY  
**6LTR**

FIRE RATING  
**13A**

EXTINGUISHER MEDIUM  
**WATER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**+5°C to +60°C**

CYLINDER MATERIAL  
**STAINLESS STEEL**

PRESSURING GAS  
**NITROGEN**



**6kg Powder  
Stainless Steel**

CODE  
**CX-PWD-006-DSS**

CAPACITY  
**6KG**

FIRE RATING  
**34A 183B C**

EXTINGUISHER MEDIUM  
**ABC POWDER**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**-30°C to +60°C**

CYLINDER MATERIAL  
**STAINLESS STEEL**

PRESSURING GAS  
**NITROGEN**



**6ltr Foam  
Stainless Steel**

CODE  
**CX-FFF-006-DSS**

CAPACITY  
**6LTR**

FIRE RATING  
**21A 144B**

EXTINGUISHER MEDIUM  
**FLUORINE-FREE FOAM**

WORKING PRESSURE  
**14 BAR @ 20°C**

TEMPERATURE RANGE  
**0°C to +60°C**

CYLINDER MATERIAL  
**STAINLESS STEEL**

PRESSURING GAS  
**NITROGEN**





## Trolleys and Covers



**Trolleys and Fire Point Stands ensure all relevant fire safety equipment and ancillaries are both stored efficiently and easily transportable, offering the utmost practicality. While fire extinguisher covers provides an economical solution for protection for your fire safety equipment.**

To support a variety of settings, we have also developed a range of fire safety bundles including our cabinets and stands range. Browse the entire offering, including exclusive LFX bundles, on [CheckFire.co.uk](https://www.checkfire.co.uk).





#### Flat-pack Fire Point Stand

CODE  
**CON-STD-01**

CAPACITY  
**17KG**

EXTERNAL DIMS (WHD)  
**1830 X 600 X 530MM**

FIRE EXTINGUISHERS  
**2-3**

**SIMPLE 3 STEP ASSEMBLY**

**ROBUST NYLON WHEELS AND STEEL FRAME**

**LARGE BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING**

**BUNDLES AVAILABLE**



#### Flat-pack Compact Trolley

CODE  
**CON-STD-02**

CAPACITY  
**8.9KG**

EXTERNAL DIMS (WHD)  
**1460 X 430 X 430MM**

FIRE EXTINGUISHERS  
**2**

**SIMPLE 3 STEP ASSEMBLY**

**ROBUST NYLON WHEELS AND STEEL FRAME**

**SPACE FOR FIRE BUCKET**

**BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING**

**BUNDLES AVAILABLE**



#### Flat-pack Triple Fire Point Stand

CODE  
**CON-STD-03**

CAPACITY  
**44.1KG**

EXTERNAL DIMS (WHD)  
**1460 X 430 X 430MM**

FIRE EXTINGUISHERS  
**2-3**

**SIMPLE ASSEMBLY**

**ROBUST NYLON WHEELS AND STEEL FRAME**

**EXTRA BRACKETS AND SIDE PANELS ALLOW FOR ADDITIONAL FIRST AID AND SPILL KIT DISPLAY**

**BUNDLES AVAILABLE**



#### Compact Double Trolley

CODE  
**CS23A**

CAPACITY  
**14KG**

EXTERNAL DIMS (WHD)  
**1200 X 470 X 400MM**

FIRE EXTINGUISHERS  
**2**

**ROBUST POWDER COATED STEEL FRAME**

**NYLON WHEELS**

**SPACE FOR ALARM BELL / SITE ALARM**

**COMPAC. SPACE SAVING DESIGN**



#### LFX Construction Stand Bundles

CODE  
**BN-SD-001-LFX**  
**BN-SD-002-LFX**  
**BN-SD-003-LFX**  
**BN-SD-004-LFX**

CAPACITY  
**17KG**


EXTERNAL DIMS (WHD)  
**1830 X 600 X 530MM**

FIRE EXTINGUISHERS  
**2-3**

**SIMPLE 3 STEP ASSEMBLY**

**ROBUST NYLON WHEELS AND STEEL FRAME**

**LARGE BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING**



#### Mobile Fire Point Stand

CODE  
**CON-FPS-001-RED**

CAPACITY  
**20KG**

EXTERNAL DIMS (WHD)  
**1800 X 890 X 480MM**

FIRE EXTINGUISHERS  
**2-3**

**ROBUST POWDER COATED STEEL FRAME**

**NYLON WHEELS**

**SPACE FOR FIRE BUCKET**

**SPACE FOR ALARM BELL / SITE ALARM**

**A LARGE STEEL BACKBOARD FOR MOUNTING ALARM EQUIPMENT AND SIGNAGE**

**ALSO AVAILABLE IN YELLOW, GREEN AND BLUE**



#### PVC Extinguisher Cover (Medium)

CODE  
**CS22**

**FITS UP TO 6KG / 6LTR FIRE EXTINGUISHERS**

**QUALITY PVC MATERIAL**

**CLEAR VIEWING WINDOW**

**VELCRO STRAPS TO ALLOW FOR EASE OF FITTING AND SECURING**



#### PVC Extinguisher Cover (Large)

CODE  
**CS21**

**FITS UP TO 9KG / 9LTR FIRE EXTINGUISHERS**

**QUALITY PVC MATERIAL**

**CLEAR VIEWING WINDOW**

**VELCRO STRAPS TO ALLOW FOR EASE OF FITTING AND SECURING**



## Stands

In settings where wall mounting isn't feasible, fire extinguisher stands offer a practical solution to protecting fire extinguishers from accidental damage and misuse while ensuring obvious and easy access. With no drilling or specialist tools required, the CheckFire range of extinguisher stands are available in a range of finishes and designs and offer a resilient, fuss-free way to display and protect fire extinguishers.

### Features

- Dedicated area for application of signage
- Provide easy and obvious access
- No drilling or tools required
- Suitable for most fire extinguishers
- Various designs and finishes available
- Easily relocate as needed



### Commander Single Extinguisher Stand

CODE  
**CS50**

WEIGHT  
**1.2KG**

DIMENSIONS  
**280 X 750 X 275MM**

SUITABLE FOR  
**MAX 200MM**

**RELIABLE AND ROBUST  
POLY-PROPYLENE  
PLASTIC MATERIAL**

**GRIPPED BASE TO  
PROTECT FLOOR  
SURFACE**

**EASILY COMBINE TO  
MAKE A TRIPLE PLUS  
STAND**

**INSERTS SOLD  
SEPARATELY**



### Commander Double Extinguisher Stand

CODE  
**CS51 | CS51A**

WEIGHT  
**2.3KG**

DIMENSIONS  
**548 X 750 X 288.5MM**


SUITABLE FOR  
**MAX 200MM**

**RELIABLE AND ROBUST  
POLY-PROPYLENE  
PLASTIC MATERIAL**

**GRIPPED BASE TO  
PROTECT FLOOR  
SURFACE**

**EASILY COMBINE TO  
MAKE A TRIPLE PLUS  
STAND**

**INSERTS SOLD  
SEPARATELY**



### Single Tubular Stand

CODE  
**CS30**


WEIGHT  
**1.75KG**

DIMENSIONS  
**840 X 390 X 300MM**

**BASE GRIPS FOR  
FLOOR PROTECTION**

**STRONG AND  
LIGHTWEIGHT,  
ALLOWING FOR EASY  
TRANSPORTATION**

**SUITABLE FOR -  
EXTINGUISHER SIZES  
2KG/LTR - 9KG/LTR  
WITH THE EXCEPTION  
OF A 5KG CO2**



### Double Tubular Stand

CODE  
**CS31**

WEIGHT  
**2.5KG**

DIMENSIONS  
**840 X 500 X 300MM**

**BASE GRIPS FOR  
FLOOR PROTECTION**

**STRONG AND  
LIGHTWEIGHT,  
ALLOWING FOR EASY  
TRANSPORTATION**

**SUITABLE FOR -  
EXTINGUISHER SIZES  
2KG/LTR - 9KG/LTR  
WITH THE EXCEPTION  
OF A 5KG CO2**



### Single Tubular Stand

CODE  
**CS32**

WEIGHT  
**1.75KG**

DIMENSIONS  
**840 X 390 X 300MM**

**BASE GRIPS FOR  
FLOOR PROTECTION**

**STRONG AND  
LIGHTWEIGHT,  
ALLOWING FOR EASY  
TRANSPORTATION**

**AVAILABLE IN  
STAINLESS STEEL,  
ANTIQUE COPPER  
AND POLISHED GOLD**

**SUITABLE FOR -  
EXTINGUISHER SIZES  
2KG/LTR - 9KG/LTR  
WITH THE EXCEPTION  
OF A 5KG CO2**



### Double Tubular Stand

CODE  
**CS33**

WEIGHT  
**2.5KG**

DIMENSIONS  
**840 X 500 X 300MM**

**BASE GRIPS FOR  
FLOOR PROTECTION**

**STRONG AND  
LIGHTWEIGHT,  
ALLOWING FOR EASY  
TRANSPORTATION**

**AVAILABLE IN  
STAINLESS STEEL,  
ANTIQUE COPPER  
AND POLISHED GOLD**

**SUITABLE FOR -  
EXTINGUISHER SIZES  
2KG/LTR - 9KG/LTR  
WITH THE EXCEPTION  
OF A 5KG CO2**





## Cabinets

While placement of the right fire extinguisher is vital, it's just as important that every measure is taken to protect them from corrosion, damage and vandalism. More than simply being advisory, this requirement is stipulated within the British Standards. The Commander Cabinet range is ideal for installation in any setting and provide peace of mind that fire extinguishers are protected from the elements, vandalism and accidental misuse.

### Features

- Single and double cabinets available
- Offer extremely robust shock protection
- Internal seal protects against dust and water ingress\*
- UV and chemical resistance
- Manufactured from poly-propylene
- IP59K rated

*\*Not applicable to single cabinets*



#### Single Commander Cabinet

CODE  
**CS01-DA9**

CAPACITY  
**9KG/9LTR/2KG CO2**

EXTERNAL DIMS (WHD)  
**335 X 715 X 240MM**

INTERNAL DIMS (WHD)  
**264 X 652 X 204MM**

FULLY WEATHER RESISTANT

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM



#### Single Cabinet Extended

CODE  
**CS02-DA**

CAPACITY  
**9KG/9LTR/5KG CO2**

EXTERNAL DIMS (WHD)  
**335 865 X 240MM**

INTERNAL DIMS (WHD)  
**264 X 816 X 204MM**

FULLY WEATHER SEALED

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM



#### LFX Single Cabinet

CODE  
**CB-LI-003-LFX**

CAPACITY  
**1 X 6LTR/9LTR**

EXTERNAL DIMS (WHD)  
**335 X 715 X 240MM**

INTERNAL DIMS (WHD)  
**264 X 652 X 204MM**

FULLY WEATHER SEALED

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM



#### LFX Double Cabinet

CODE  
**CB-LI-002-LFX**

CAPACITY  
**2 X 6LTR**

EXTERNAL DIMS (WHD)  
**616 X 735 X 270MM**

INTERNAL DIMS (WHD)  
**530 X 700 X 229MM**

FULLY WEATHER SEALED

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM



#### Double Cabinet

CODE  
**CS03-DA**

CAPACITY  
**2 X 9KG/9LTR/2KG CO2**

EXTERNAL DIMS (WHD)  
**616 X 735 X 270MM**

INTERNAL DIMS (WHD)  
**530 X 700 X 229MM**

FULLY WEATHER SEALED

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM

MANUFACTURED FROM PP

LOCKABLE

ALSO AVAILABLE IN YELLOW, GREEN AND BLUE



#### Commander Double Lockable Cabinet

CODE  
**CS03A-DA**

CAPACITY  
**2 X 9KG/9LTR/2KG CO2**

EXTERNAL DIMS (WHD)  
**616 X 735 X 270MM**

INTERNAL DIMS (WHD)  
**530 X 700 X 229MM**

FULLY WEATHER SEALED

RESISTANT TO CHEMICALS

INNOVATIVE INTERNAL CLAMP SYSTEM

MANUFACTURED FROM POLYPROPYLENE

LOCKABLE



#### Vehicle Extinguisher Cabinet 6kg / 9kg

CODE  
**CS04-DA / CS05-DA**

CAPACITY  
**1 X 140/160MM EXTINGUISHER**

EXTERNAL DIMS (WHD)  
**265 X 284 X 595MM**

INTERNAL DIMS (WHD)  
**224 X 224 X 561MM**

NYLON HANDLE SEALABLE OR LOCKABLE

REINFORCED AND NON DEFORMABLE STRUCTURE

INTERNAL TPE SEAL AGAINST WATER AND DUST

OPTIONAL BRACKETS CAN BE MOUNTED ON ANY SIDE



#### Commander Safety Box

CODE  
**CS60**

CAPACITY  
**4 X 6LTR/6KG**

EXTERNAL DIMS (WHD)  
**655 X 520 X 570MM**

INTERNAL DIMS (WHD)  
**536 X 420 X 537MM**

HIGH RESISTANCE TO: WATER AND DUST INGRESS, UV RAYS, HIGH AND LOW TEMPERATURES

SMOOTH, FLAT LID FOR SIGN APPLICATION

ERGONOMIC SIDE HANDLES FOR EASY CARRYING

ALSO AVAILABLE WITH COMMANDER CONTACT ALARM - SEE PAGE 47



## Fire Blankets



Fire Blankets provide additional fire safety in a kitchen or catering setting, or in the event of clothing fires. Available in a range of sizes, covering the flames with a fire blanket cuts the supply of oxygen to the contents of a pan, or a person's clothing, suffocating the fire.

### Features

- Supplied with rigid case
- Available in a range of sizes
- Kitemarked and manufactured to BS EN 1869





**Commander  
Fire Blanket**

CODE  
**FB01**

SIZE  
**1.1 X 1.1M**

BLANKET MATERIAL  
**SILOCOE COATED  
FIBERGLASS FABRIC**

OUTER CASE MATERIAL  
**POLY-PROPYLENE CASE**

WARRANTY  
**5 YEARS**



**Commander  
Fire Blanket**

CODE  
**FB02**

SIZE  
**1.2 X 1.2M**

BLANKET MATERIAL  
**SILOCOE COATED  
FIBERGLASS FABRIC**

OUTER CASE MATERIAL  
**POLY-PROPYLENE CASE**

WARRANTY  
**5 YEARS**



**Commander  
Fire Blanket**

CODE  
**FB03**

SIZE  
**1.8 X 1.2M**

BLANKET MATERIAL  
**SILOCOE COATED  
FIBERGLASS FABRIC**

OUTER CASE MATERIAL  
**POLY-PROPYLENE CASE**

WARRANTY  
**5 YEARS**





## Fire Extinguisher Signs

Signage for fire safety is vital to ensure everyone is aware of the correct procedures to follow and actions to take in the event of a fire. From fire extinguisher identification to fire exit signs, deploying mandatory fire safety signs comply with regulations is simple with our photoluminescent, high quality range. Our range of emergency escape signs help to clearly communicate where the nearest emergency exit and direct people safely off the premises. Whilst our fire action, equipment and door signs ensure that all users of the building are aware of the location of fire doors in event of emergency and understand exactly what action to take.

### Features

- Photoluminescent as standard
- Contempo finishes available for selected signs
- Various dimensions available
- Manufactured to BS 5499-1:2011



### Water ID Sign

CODE  
101P / 111P

SIZES  
75 X 200MM  
150 X 100MM



### Foam Spray ID Sign

CODE  
SN-FS-118-PHL  
SN-FS-158-PHL

SIZES  
75 X 200MM  
150 X 100MM



### CO2 ID Sign

CODE  
103P / 113P

SIZES  
75 X 200MM  
150 X 100MM



### Powder ID Sign

CODE  
104P / 114P


SIZES  
75 X 200MM  
150 X 100MM



### Wet Chemical ID Sign

CODE  
105P / 115P

SIZES  
75 X 200MM  
150 X 100MM



### Fire Blanket ID Sign

CODE  
106P / 116P

SIZES  
75 X 200MM  
150 X 100MM



### Lithium-ion ID Sign

CODE  
SN-LI-119-PHL /  
SN-LI-159-PHL

SIZES  
75 X 200MM  
150 X 100MM



### Water Mist ID Sign

CODE  
110P / 120P

SIZES  
75 X 200MM  
150 X 100MM



# Emergency Escape Signs



**Fire Exit  
(Right) Sign**

CODE  
201P / 211P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Up) Sign**

CODE  
202P / 212P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Down) Sign**

CODE  
203P / 213P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Left) Sign**

CODE  
204P / 214P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Up Left) Sign**

CODE  
205P / 215P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Down Right) Sign**

CODE  
206P / 216P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Up Right) Sign**

CODE  
207P / 217P

SIZES  
300 X 100MM  
450 X 150MM



**Fire Exit  
(Down Left) Sign**

CODE  
208P / 218P

SIZES  
300 X 100MM  
450 X 150MM



**Turn Left To  
Open Sign**

CODE  
209P

SIZES  
100 X 100MM



**Turn Right To  
Open Sign**

CODE  
210P

SIZES  
100 X 100MM



**Final  
Exit Sign**

CODE  
301P

SIZES  
100 X 150MM



**Final Exit  
(Man Left) Sign**

CODE  
302P

SIZES  
100 X 150MM



**Push Bar To  
Open Sign**

CODE  
305P / 306P /  
307P / 315P

SIZES  
300 X 100MM  
450 X 150MM  
300 X 150MM  
600 X 75MM



**Push Bar To  
Open Sign**

CODE  
308P


SIZES  
600 X 75MM



**Fire Assembly  
Point Sign**

CODE  
702P / 712P

SIZES  
400 X 300MM  
600 X 400MM



**Fire Exit  
Keep Clear Sign**

CODE  
309P

SIZES  
450 X 150MM

# Fire Action, Equipment and Door Signs



**Fire Action  
Standard Sign**

CODE  
401P

SIZES  
150 X 200MM



**Fire Action  
Picto Sign**

CODE  
402P

SIZES  
150 X 200MM



**Fire Alarm Call  
Point Sign**

CODE  
501P

SIZES  
150 X 200MM



**Fire  
Extinguisher Sign**

CODE  
502P

SIZES  
150 X 200MM



**Fire Hose  
Reel Sign**

CODE  
503P


SIZES  
150 X 200MM



**Fire  
Point Sign**

CODE  
504P

SIZES  
150 X 200MM



**Call Point  
Picto Sign**

CODE  
505P

SIZES  
100 X 100MM



**Fire Extinguisher  
Picto Sign**

CODE  
506P

SIZES  
100 X 100MM



**Fire Alarm Call  
Point Sign**

CODE  
511P

SIZES  
200 X 300MM



**Fire  
Extinguisher Sign**

CODE  
512P

SIZES  
200 X 300MM



**Fire Hose  
Reel Sign**

CODE  
503P

SIZES  
200 X 300MM



**Fire  
Point Sign**

CODE  
514P

SIZES  
200 X 300MM



**Automatic Fire  
Door Sign**

CODE  
901P

SIZES  
100 X 100MM



**Fire Door Keep  
Shut Sign**

CODE  
902P

SIZES  
100 X 100MM



**Fire Door Keep  
Locked Sign**

CODE  
903P

SIZES  
100 X 100MM



**Fire Door Keep  
Closed Sign**

CODE  
904P

SIZES  
100 X 100MM

ANCILLARIES



## Alarms

Effective alarm systems support the protection of people, property and assets. From the Commander Site Alarm range, to rotary alarm bells and air horns, our range of alarms provide peace of mind whatever the setting.

### Features

- Commander Push Button and Wireless Site Alarm options available
- Various alarm options across the range





#### Commander Wireless Site Alarm

CODE  
**EE-AL-002-SIT**

WEIGHT  
**633G**

DIMENSIONS (DH)  
**150 X 234 X 90MM\***

ALARM SOUND LEVEL  
**105DB**

**SUPER BRIGHT LED STROBE**

**ABS CASE RESISTS SHOCK AND DROPS**

**SIMPLE INSTALLATION AND OPERATION**

**PUSH BUTTON ACTIVATED**

**IP65 RATED**

\*(INCLUDING ACTIVATION BUTTON AND STROBE/SIREN)



#### Commander Single Site Alarm

CODE  
**EE-AL-001-SIT**

WEIGHT  
**633G**

DIMENSIONS (WDH)  
**150 X 234 X 90MM\***

ALARM SOUND LEVEL  
**105DB**

**SUPER BRIGHT LED STROBE**

**ABS CASE RESISTS SHOCK AND DROPS**

**SIMPLE INSTALLATION AND OPERATION**

**PUSH BUTTON ACTIVATED**

**IP65 RATED**

\*(INCLUDING ACTIVATION BUTTON AND STROBE/SIREN)



#### Commander Contact Alarm

CODE  
**AE15**

WEIGHT  
**100G**

DIMENSIONS (ØD)  
**87 X 87 X 43MM**

ALARM SOUND LEVEL  
**85DB-110DB**

**SIMPLE FITTING AND OPERATION**

**SUITABLE FOR USE ON THE CS60 AND ALL CABINETS OF ALARM FUNCTION**



#### Rotary Alarm Bell

CODE  
**AE01**

WEIGHT  
**1.57KG**

DIMENSIONS (ØD)  
**274 X 89.4MM**

ALARM SOUND LEVEL  
**85DB**

**SUITABLE FOR USE INDOORS AND OUTDOORS**

**HAND-OPERATED FIRE ALARM BELL**

**ALUMINIUM ALLOY**



#### Air Horn Alarm

CODE  
**AE02**

ACOUSTIC RANGE  
**APPROX. 1500M**

**IDEAL FOR PROVIDING TEMPORARY COVER**

**IDEAL FOR CONSTRUCTION SITE APPLICATIONS**

ALARM SOUND LEVEL  
**110DB**



#### Smoke Alarm

CODE  
**AE20**

WEIGHT  
**130G**

DIMENSIONS (DH)  
**110 X 370MM**

ALARM SOUND LEVEL  
**85DB**

TECHNOLOGY  
**IONISATION SMOKE SENSOR**

BATTERY TYPE  
**9V ALKALINE**

WARRANTY  
**5 YEARS**

**CEILING INSTALLATION**



**CHECKFIRE GROUP**  
PANT GLAS INDUSTRIAL ESTATE, BEDWAS, CAERPHILLY, CF83 8DR, UK

T +44 029 2086 8333  
E [INFO@CHECKFIRE.CO.UK](mailto:INFO@CHECKFIRE.CO.UK)

CHECKFIRE GROUP IS A COMPANY REGISTERED IN ENGLAND AND WALES WITH COMPANY NUMBER 7990436. VAT NUMBER 144 0143 57