



Palazzani TZX 620



FLORIDA'S AUTHORIZED PALAZZANI DISTRIBUTOR

Palazzani TZX 620



PERFORMANCE

- Maximum working height 62'4"
- Maximum side reach 27'11"
- Maximum basket weight load 440 lb
- Turret rotation range 360 degrees
- Basket rotation range 90 degrees
- Maximum slope to stabilize 18%
- Gradeability - max. travel angle/slope 31%
- Maximum crawler travel speed 1.76 fps
- Maximum crawler travel speed 1.2 mph



Non Marking Tracks

DIMENSIONS

- Basket height (inches) 43"
- Basket width (inches) 28"
- Basket length (inches) 55"
- Total length (feet and inches) 16'6"
- Height in transport position (inches) 6'7"
- Total width (without basket) (inches) 39"
- Total width (with basket) (inches) 55"
- Tracks (LxW) (inches x inches) 58" x 8"
- Outrigger spread length in wide position .. 11'10"
- Outrigger spread width in wide position .. 11'12"
- Outrigger foot diameter 10"



Outriggers

WEIGHT

- Total weight 5070 lbs
- Maximum outrigger foot pressure 3595 lbs
- Outrigger foot pressure 36.55 psf
- Track pressure 68.30 psf



Dual Power Options

POWER

- Diesel Power Kubota Z602-EF03
- Plug in Electric Power 110V/15A

Palazzani TZX 620



Basket Control Panel



Basket Foot Pedal



Hose Connection



Wireless Remote




Basket Load Capacity



STRENX Steel

Palazzani TZX 620

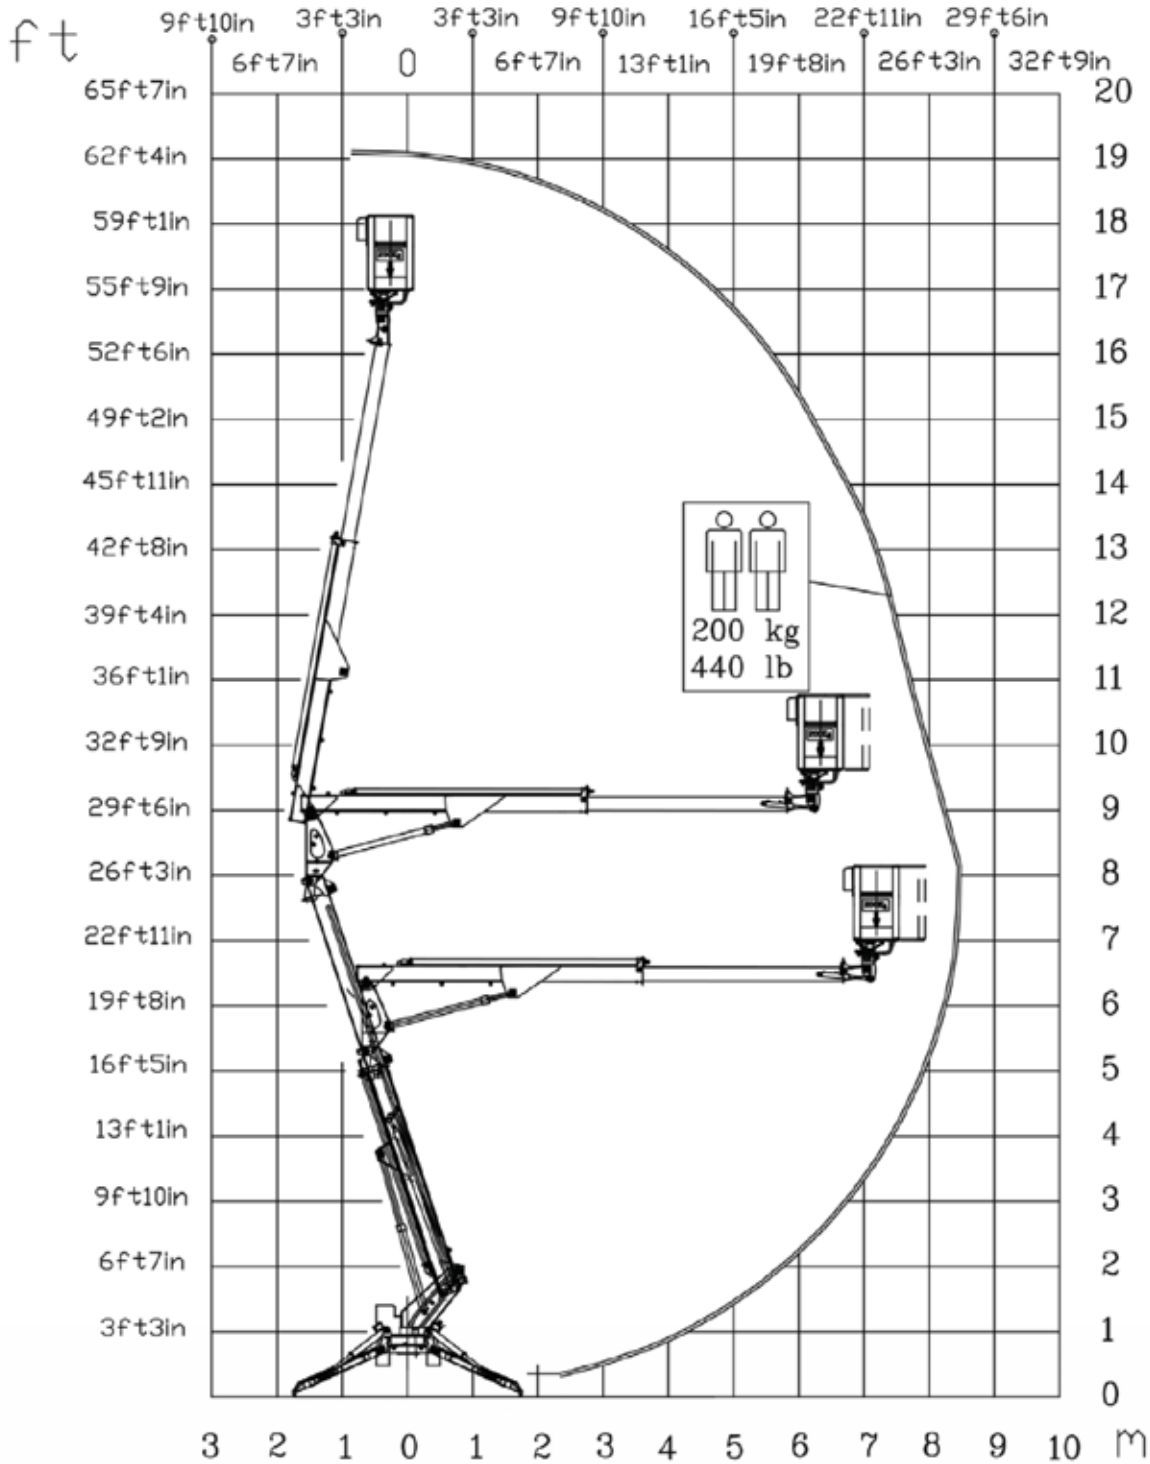

Palazzani TZX 620

