



Palazzani TSJ 82



FLORIDA'S AUTHORIZED PALAZZANI DISTRIBUTOR

Palazzani TSJ 82



PERFORMANCE

- Maximum working height 82'
- Maximum side reach 43'3"
- Maximum basket weight load 550 lb
- Moveable jib articulating range 90 degrees
- Turret rotation range 360 degrees
- Basket rotation range 160 degrees
- Maximum slope to stabilize 32%
- Gradeability - max. travel angle/slope 36%
- Maximum crawler travel speed 0.91 fps
- Maximum crawler travel speed 0.62 mph



Non Marking Tracks

DIMENSIONS

- Basket height (inches) 44"
- Basket width (inches) 28"
- Basket length (inches) 71"
- Total length (feet and inches) 21'4"
- Height in transport position (inches) 6'7"
- Total width (without basket) (inches) 39"
- Total width (with basket) (inches) 71"
- Tracks (LxW) (inches x inches) 68" x 9"
- Track extension range 12"
- Outrigger spread length in narrow position 21'6"
- Outrigger spread width in narrow position 8'7"
- Outrigger spread length in wide position 16'4"
- Outrigger spread width in wide position 15'11"
- Outrigger spread width in one side wide & one side narrow position 12'3"
- Outrigger foot diameter 12"x7.75"



Wireless Controls

WEIGHT

- Total weight 8708 lbs
- Maximum outrigger foot pressure 5844 lbs
- Outrigger foot pressure 34.25 psf
- Track pressure 70.59 psf

POWER

- Diesel Power Kubota Z602-EF03
- Plug in Electric Power 110V/15A



Kubota Diesel

Palazzani TSJ 82




Basket




Bucket Pedal




Receiver/Charger

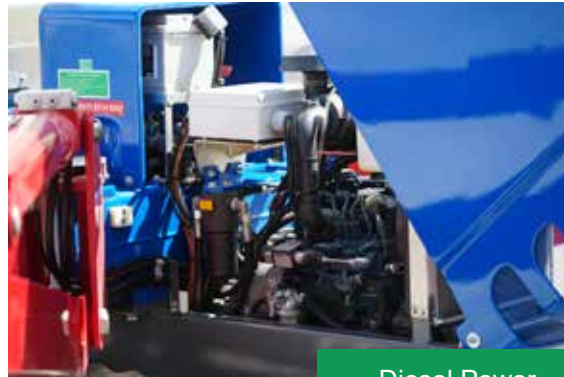

Diesel Power

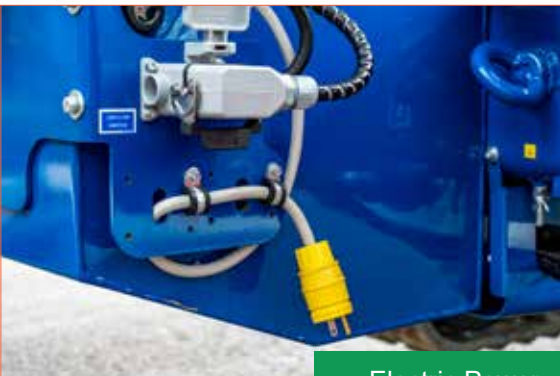

Electric Power

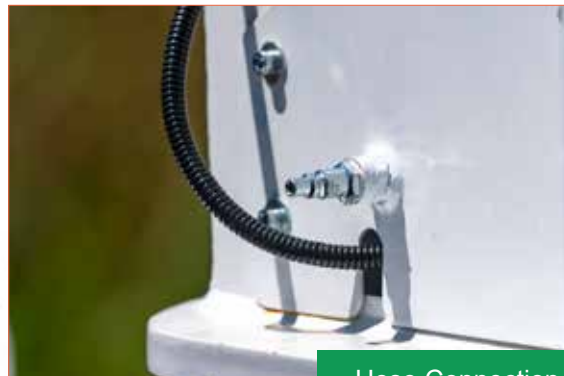

Hose Connection

Palazzani TSJ 82



Level Gauge



Outrigger Hydraulics



Outrigger Pad



Outriggers



Rear Controls



Telescoping Boom

Palazzani TSJ 82



Tiedown Point



Electrical Plug



Bucket Load



Made in Italy




STRENX Steel




Basket Controls


Palazzani TSJ 82

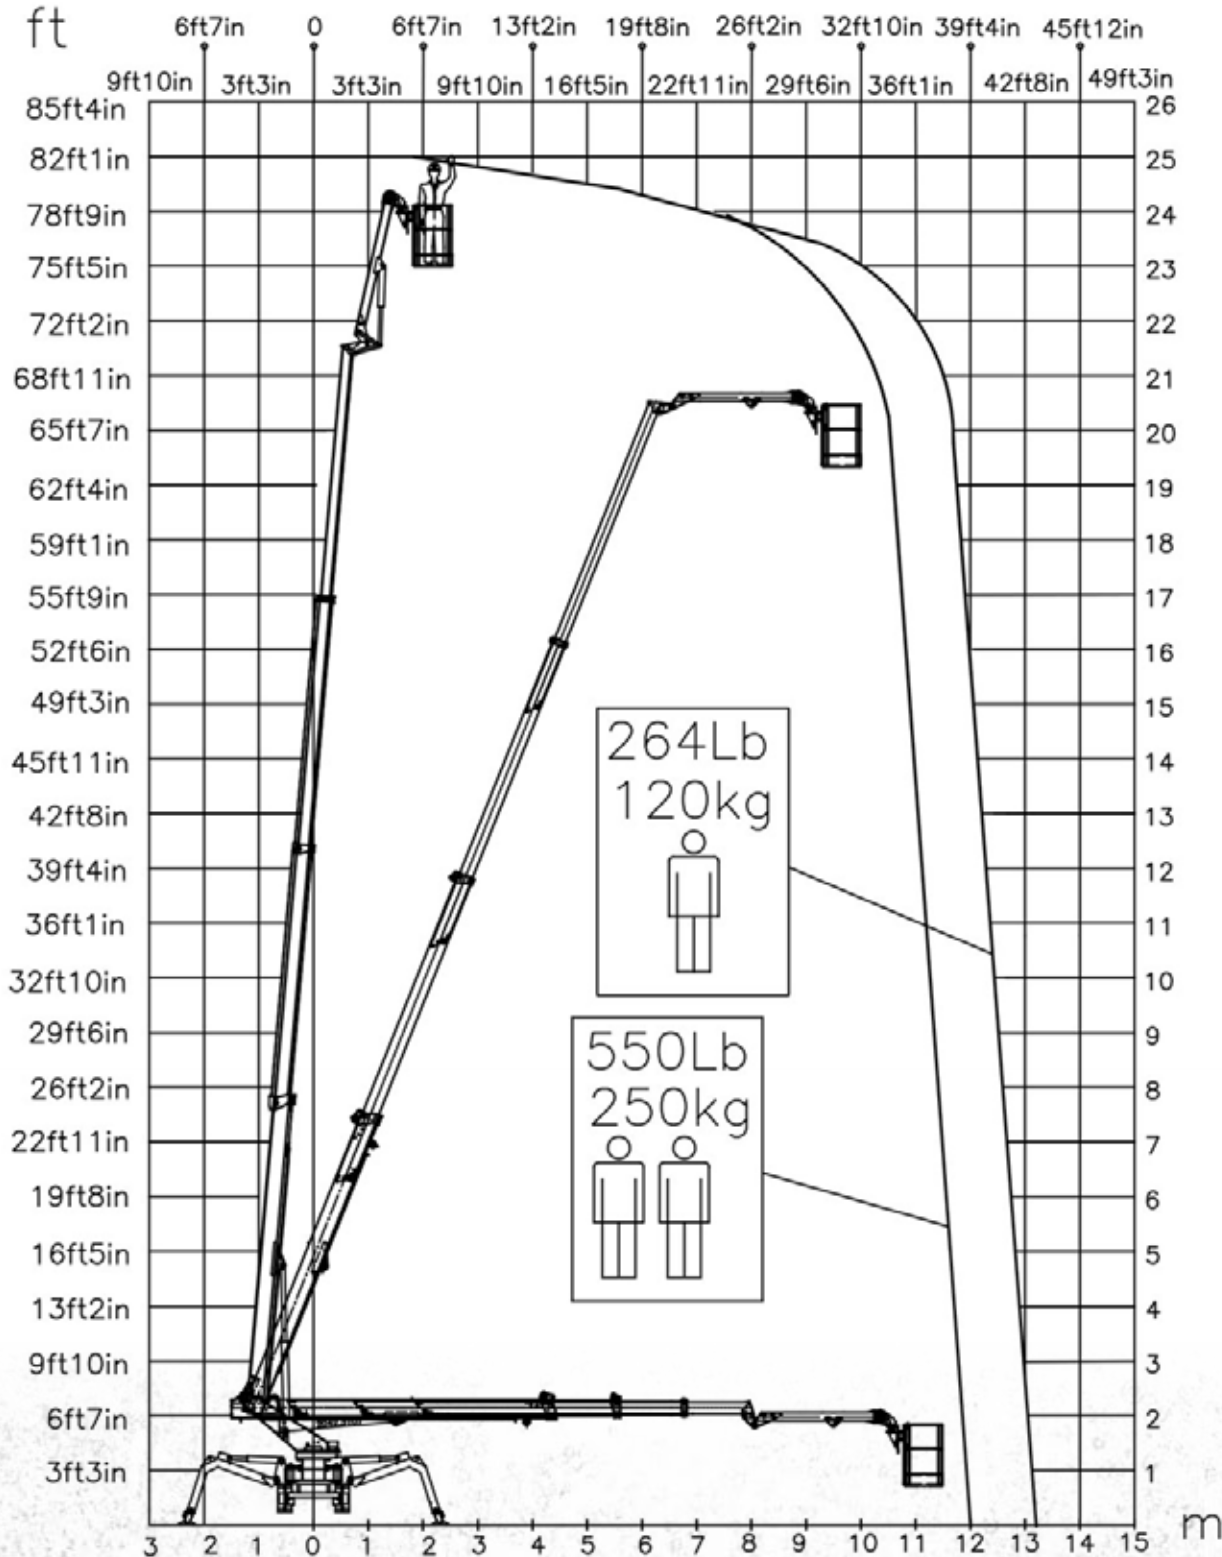

Palazzani TSJ 82

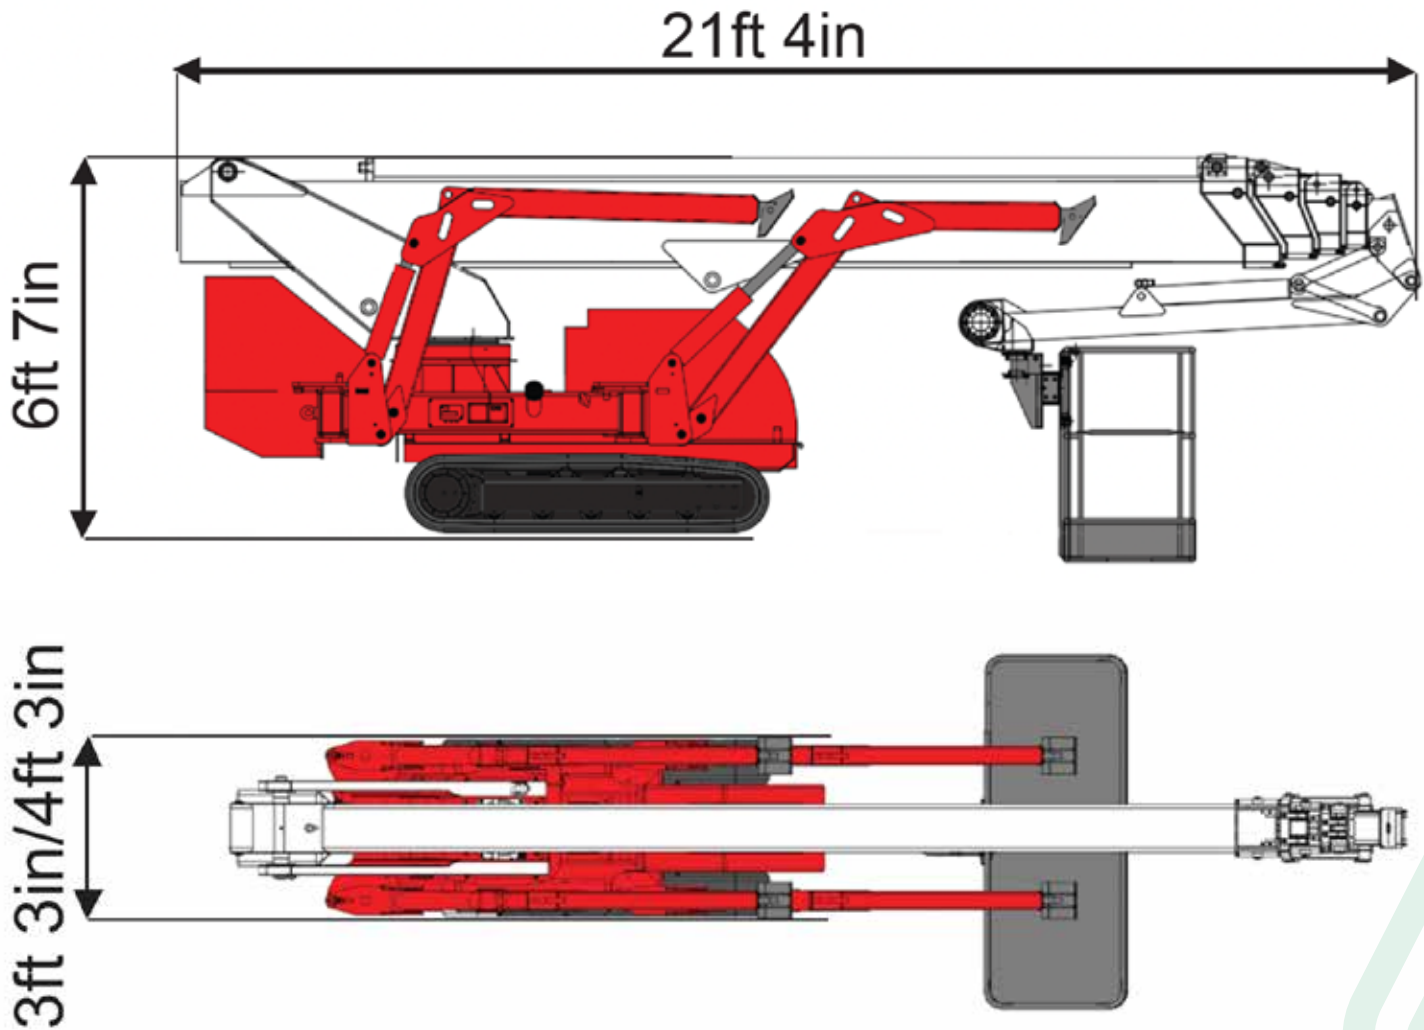

Palazzani TSJ 82

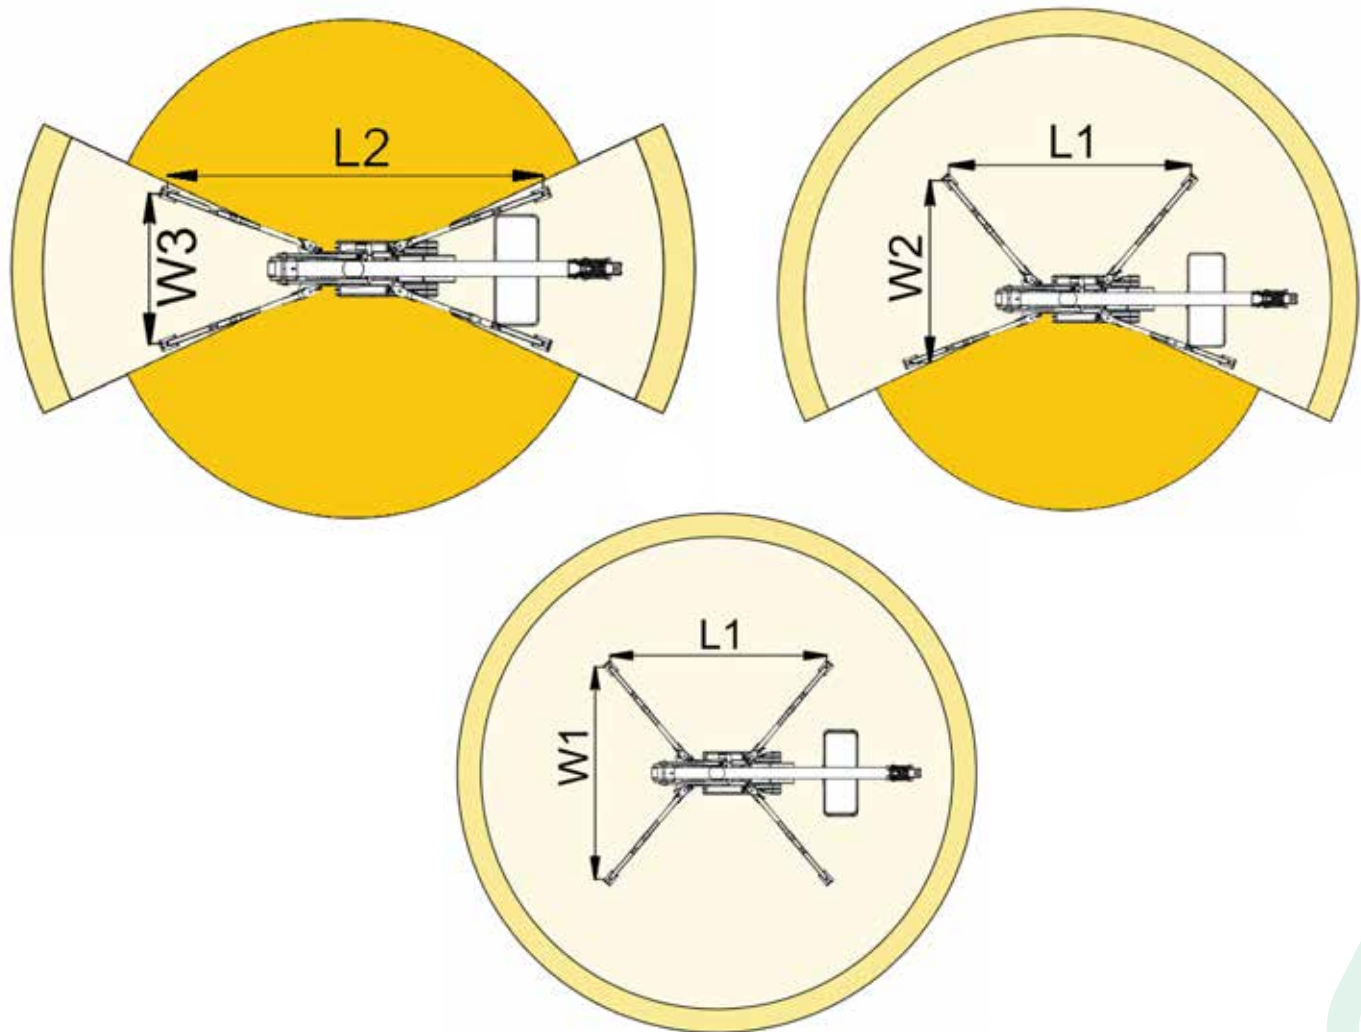

L1	L2	W1	W2	W3
16ft 4in	21ft 6in	15ft 11in	12ft 3in	8ft 7in