




Victa Unattended

Keep commerce moving with Verifone’s rugged, always-on payment solution.

Victa Unattended features a bright 3.5” touchscreen, PIN entry, and flexible connectivity—including 4G LTE—for secure, tap-to-pay transactions in high-traffic environments. Its weather- and impact-resistant design makes it ideal for kiosks, transit, and vending—indoors or out.

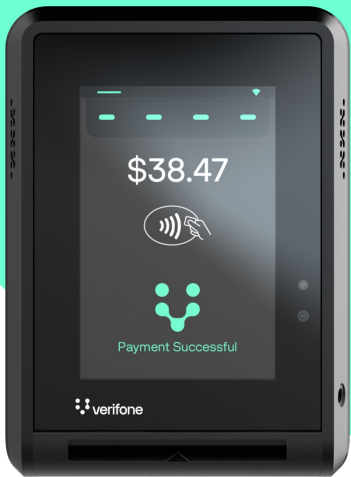

Key Features

Customer experience

- Scan codes for loyalty, coupons, or APM with the dedicated **barcode camera**
- Deliver receipts instantly with **NFC-enabled digital receipts**
- **IP65 and IK09 ratings** support durability for both indoor and outdoor use

Power and performance

- **Qualcomm quad-core A53 processor** boosts apps performance
- Stay connected anywhere with **Wi-Fi and 4G LTE**
- **Connect to Verifone’s cloud-based services** to enable application management.

Secure the sale

- Keep transactions safe with **PCI 7 compliance**.
- Run powerful apps with **Android 13**
- Verifone sets the standard for accessibility with **the award-winning Navigator app**.

Performance			
Processor	Qualcomm QCM2290 (A53 quad-core, 2.0GHz)	Power	<ul style="list-style-type: none">9-43V DC power supply2 low power modes
Memory	<ul style="list-style-type: none">2GB RAM (option: 3GB)32GB flashMicroSD slot	OS	Verifone Secure OS <ul style="list-style-type: none">Engage VOS3VAOS based on Android 13
Display	3.5" color LCD with capacitive multi-touch	Resolution	480x320
Camera	Front-facing 2MP FF with barcode scanning		
Multimedia	Speaker, buzzer	Security	PCI PTS v7.x approved
Connectivity			
Wi-Fi	<ul style="list-style-type: none">2.4GHz b/g/n5GHz 802.11 a/n/ac	Bluetooth	Bluetooth® v5.0
Cellular	<ul style="list-style-type: none">4G LTE Cat 43G/2G fallback	SIM	1x SIM slot 1x eSIM
Wired	Ethernet 10/100, MDB, USV-client, 2x USB Host, RS232		
Payment Acceptance			
Card Reader	<ul style="list-style-type: none">Smartcard readerEMV 4.3c	Contactless	<ul style="list-style-type: none">EMVCo L1 3.1a+ISO 14443/4, ISO 18092
NFC/CTLS schemes	Supports major NFC/CTLS schemes	APM supported	Supports advanced payment methods
Physical			
Size	121mm × 89.5mm × 53 mm; front projection 14 mm	Weight	425g
Impact rating	IK09	IP rating	IP65
Operating temperature	-30º to 70ºC (-22º to 158ºF)	Storage temperature	-30º to 80ºC (-22º to 176ºF)
Relative humidity	5% to 90%, Non-condensing		
Additional Features			
Accessibility	<ul style="list-style-type: none">Navigator softwareNavigator stencil	Accessories	<ul style="list-style-type: none">3rd party mounting poleStylus