




# Victa SoftPOS Mobile

Accept payments and deliver personalized service—right from your pocket with this SoftPOS-ready device.

Fast, flexible, and easy to carry, Victa SoftPOS Mobile empowers merchants to engage customers wherever business happens. With an integrated contactless reader and support for custom applications, it’s a sleek hardware solution designed to work seamlessly with your preferred SoftPOS software.

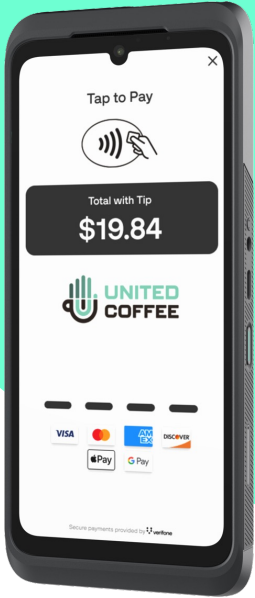

## Key Features

### Customer Experience

- 6.7” HD touchscreen enhances engagement
- Contactless reader behind the display improves tap-to-pay ergonomics
- NFC-enabled digital receipts for instant delivery
- Access business apps via the Google Play Store

### Power & Performance

- Qualcomm Octa-core processor boosts app responsiveness
- Over 12 hours of continuous battery life
- Dedicated barcode camera for scanning coupons and loyalty codes

### Built for the Future

- Runs Android 14 for modern app compatibility
- Accessibility-ready with Verifone’s award-winning Navigator app

PERFORMANCE			
Processor	Qualcomm SM6225 (Octa-core A73 @2.4GHz)	Power	<ul style="list-style-type: none"><li>5V, 11W via charging adapter</li><li>5000mAh Li-ion battery</li></ul>
Memory	4GB RAM + 32GB Flash	OS	Android 14 64-bit, GMS
Display	6.7" color LCD with capacitive multi-touch	Resolution	720 x 1680 HD
Camera	5MP Front facial scanner	Scanner	2MP QR scanner with Red Aimer
Multimedia	Speaker, Buzzer, Microphone, Headset Jack, Haptics		
CONNECTIVITY			
Wi-Fi	WIFI 2.4GHz + 5GHz 802.11 a/b/g/n/ac	Bluetooth	Bluetooth® v5.0   Bluetooth® low energy
Cellular	2G/3G/4G LTE CAT 4	Sim	<ul style="list-style-type: none"><li>eSIM</li><li>SIM Slot</li></ul>
Wired	USB-C, Ethernet Dongle, USB to POS		
PAYMENT ACCEPTANCE			
Contactless	<ul style="list-style-type: none"><li>MiFare</li><li>EMVCo Approved</li></ul>		
NFC/CTLS schemes	Supports major NFC/CTLS schemes	APM supported	Supports advanced payment methods
PHYSICAL			
Size	190mm x 82mm x 19mm	Weight	363g
Impact rating	IK04	IP rating	IP53
Operating temperature	-5° to 45°C (23° to 113°F)	Storage temperature	-20° to 60°C (-4° to 140°F)
Battery charge temperature	0° to 35°C (32° to 95°F)	Relative humidity	5% to 90%, Non-condensing
ADDITIONAL FEATURES			
Accessibility	Navigator Software and Hardware	Accessories	<ul style="list-style-type: none"><li>Feature Base</li><li>Mounting Module &amp; Plate</li><li>Stylus</li></ul>
Software	Use with Verifone Tap or your own SoftPOS app		