

# SOLID XS RANGE

**ENGINEERED FOR  
EXCEPTIONAL  
BEAUTY AND  
DURABILITY**


THE SOLID XS RANGE  
UTILISES HIGH QUALITY  
WPC TECHNOLOGY

**HEAVY EMBOSS  
DEEP GROOVE FINISH**

THE QUALITY ALTERNATIVE TO WOOD




CAPE GREY




LIMEWASH 1.0



LIMEWASH 2.0




MERBAU 1.0



MERBAU 2.0



SILVER ASH



GREY GUM

# THE SOLID XS DIFFERENCE

Our goal was simple – to create Australia’s most versatile, durable and sustainable decking material. The XS Range introduces designer aesthetics with advanced composite technology and an ultra thick profile engineered to withstand higher concentrated loads and Australia’s unique climate. Available in a range of stunning tones and textures, our XS Range is perfect for the discerning home owner or large scale commercial and public projects such as marinas and corporate sites.

## ADVANTAGES OF SOLID XS DECKING MATERIAL

- Extra strong and ultra durable
- The widest board on the market
- Does not absorb heat, easy to walk on
- Anti-aging and UV resistant
- Easy to install, simple to maintain
- In-built fade resistance
- Incredible colour range

## SOLID XS DECKING MATERIAL COMPARED TO OTHER CO-EXTRUSION MATERIALS

BriteDeck’s Solid XS range utilises wood-polymer composite decking technology for a superior extra strong deck that’s a low-maintenance and durable alternative to wood decking. The deck is made from hardwood and recycled polymers which combine to produce a high quality finish that out performs traditional treated wood.

## GROOVE EDGED SOLID DECKING


|                  |                |
|------------------|----------------|
| Length           | 5.4 Mtr        |
| Dimension        | 150mm x 25mm   |
| LM per SQM       | -- 6.6         |
| Residential Span | 400mm to 450mm |
| Commercial Span  | 350mm to 400mm |
| Siip Rating      | P5/R11         |
| Fire Properties  | ≥ 8.0 Kw/m2    |
| Weight           | 25KG           |

## MATCHING FASCIA BOARD

|                  |                |
|------------------|----------------|
| Length           | 2.9 Mtr        |
| Dimension        | 146mm X 10.5mm |
| LM per SQM       | -- 6.8         |
| Residential Span | N/A            |
| Commercial Span  | N/A            |
| Siip Rating      | N/A            |
| Fire Properties  | ≥ 8.0 Kw/m2    |
| Weight           | 6KG            |

## FREE ACCESSORIES WITH EVERY PURCHASE

Available for timber or metal subframes

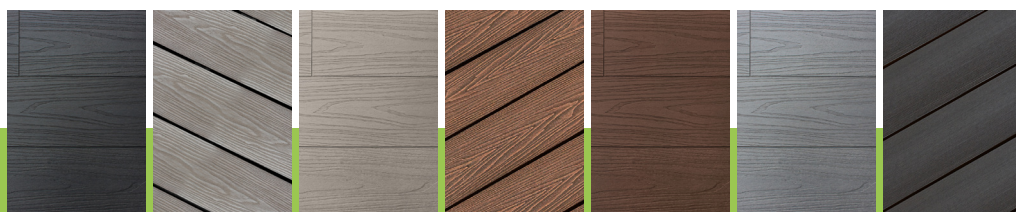

**CALL US TODAY**  
**1300 481 664**

[www.britedecking.com.au](http://www.britedecking.com.au)