



ATTACHMENT CATALOG

June 30th, 2025
North America

 **ATTACHMENTS**



ATTACHMENTS

All attachments capacities given in this document are nominal capacities:

- Bucket capacities are calculated according to the ISO 7546 norm: they correspond to the heaped bucket capacity in m³ calculated according to the norm
 - Grab bucket capacities given are total capacities with closed grab (in m³)
 - Concrete mixing bucket, silage facing bucket, feeding bucket, shear grab & shear bucket as well as concrete & crane skip capacities are given in l and calculated to guarantee a good efficiency of all functions (no struck capacities)
 - Sweeper capacities are max. dirt container capacities
 - Platform capacities are given in kg INCLUDING 2 or 3 people (according to platform type)
 - All other capacities are SWL (Safe Working Load) - in kg
 - All compatibilities are given for the machines available for sales when this guide was issued. For machines produced earlier please contact your Manitou dealer.
-

Compatibility

Having legibility in mind we have simplified the list of machines in this guide. It should be read as follows:


- All compatibilities are given for the machines present in Manitou's offer on the guide's issuing day.
- For older machines please contact your Manitou dealer.

Material densities weights

Material	lb/ft ³	Material	lb/ft ³
Apples	33	Manure (farmyard)	58
Ashes	38	Nitrate fertiliser	78
Barley	37	Oats	26
Beet pulp (nuts)	38	Onions	35
Beet pulp (pressed)	57	Peat (dry)	25
Brewers grain	69	Petroleum coke	42
Brick aggregate	114	Potatoes	44
Carrots	40	Refuse (town)	20
Cement (Portland)	90	Rubble	65
Cement (natural)	55	Sand (dry)	97
Chalk	50	Sand (wet)	118
Clay (fine)	130	Sawdust	15
Clay (wet)	105	Silage (ensile)	47
Coal (anthracite)	65	Silage (green)	22
Coal (bituminous)	48	Slurry	111
Coke (loose)	36	Snow (fresh)	12
Earth (dry)	72	Snow (wet)	25
Fertiliser (mixed)	64	Sodium chloride (dry salt)	81
Flour	28	Straw (high density bale)	16
Gravel (dry)	103	Sugar beet	33
Hay (normal density bale)	12	Turnips	34
Lime (quick)	55	Wheat	46
Limestone (crushed)	96		

ATTACHMENT CATALOG

SUMMARY

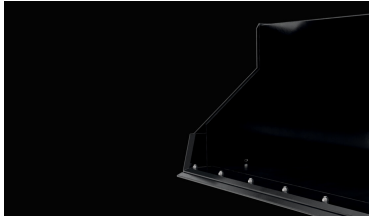

BUCKETS

Page 1



CLAMPS

Page 28



ON FORK HANDLING SOLUTIONS

Page 40




FORKS & GRABS

Page 66



JIBS

Page 68

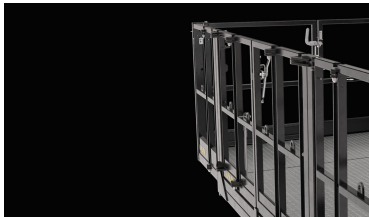

PLATFORM

Page 85



SWEEPER & CLEANER

Page 90




WINCH RANGE

Page 92



MINING SOLUTIONS

Page 96

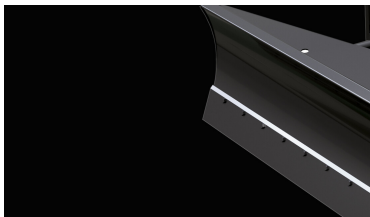

LEVELLING SOLUTIONS

Page 100




MISCELLANEOUS ATTACHMENTS


Page 102



AGRICULTURAL BUCKET

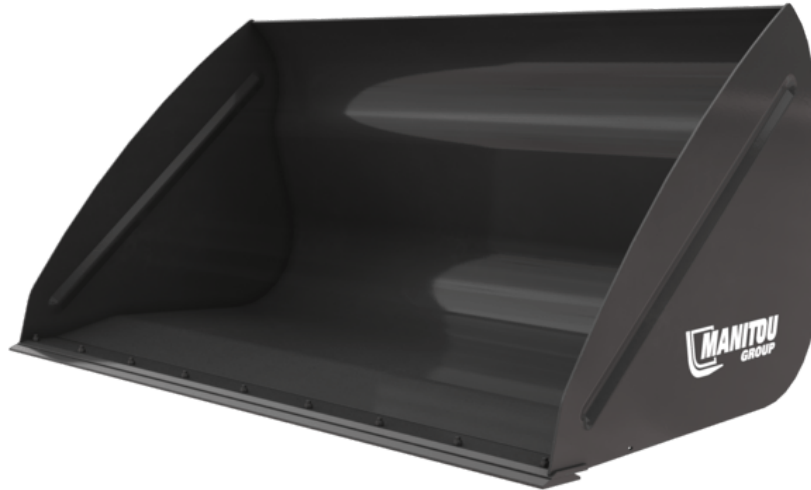

- Wide range of bucket capacities from 900 L / 32 ft³ to 3000 L / 106 ft³.
- Light material bucket suitable for handling materials with a density $\leq 1000 \text{ kg/m}^3$ / 62 lb/ft³.
- Reinforced structure (base, blade and sides).
- "DA" = tip angle increased of 10°.
- Optional: 500 HB reversible wear plate.
- Daily use and hard working bucket.
- Ideal bucket for bulk products (cereals, woodchip, mineral feed etc.).
- Shape designed for quick loading and unloading operation.



	CBA 900 / 1500	CBA 1500 / 2050	CBA 1500 / 2050 DA	CBA 1500 / 2450	CBA 1700L / 2100
Distance to center of gravity (in)	1' 9"	1' 11"	1' 8"	1' 9"	1' 5"
Capacity (lb)	1953	3307	3307	3371	3754
Heaped capacity (US gal)	234	396	396	404	450
Struck capacity (US gal)	178	291	291	291	336
Overall weight (lb)	809	1080	1063	1102	1129
Overall height (in)	3' 5"	3' 8"	3' 8"	3' 3"	3' 9"
Overall length (in)	3' 9"	3' 9"	3' 9"	3' 10"	3' 11"
Width (in)	4' 11"	6' 9"	6' 9"	8'	6' 11"
Required machine equipment	✕	✕	✕	✕	✕

Machines compatibility					
Reference number	570543				
Reference number with bolted wearplate (WP)	-	-	52000489		
Skid Steer Carriage reference	52658300	-	-	-	-
MLA-T 533-145 V+ - ST5	-	-	-	X	-
MLT 420-60 H	X	-	-	-	-
MLT 625-75 H	-	X	X	-	-
MLT 630-115 V CP	-	-	-	X	X
MLT 635-130 PS+	-	-	-	X	-
MLT 733-115 LSU	-	-	-	X	X
MLT 737-130 PS+	-	-	-	X	X
MLT 741-140 V+	-	-	-	X	X

MANDATORY MACHINE EQUIPMENT: ✕

	CBA 2000 / 2450	CBA 2000L / 2250	CBA 2500L / 2450	CBA 3000 / 2500
Distance to center of gravity (in)	1' 7"	2' 2"	1' 9"	1' 11"
Capacity (lb)	4431	4343	5569	6665
Heaped capacity (US gal)	531	520	667	799
Struck capacity (US gal)	392	385	506	619
Overall weight (lb)	1228	1290	1488	1660
Overall height (in)	3' 9"	3' 7"	4' 1"	4' 4"
Overall length (in)	3' 11"	4' 8"	4' 11"	5' 8"
Width (in)	8'	7' 5"	8'	8' 2"
Required machine equipment	✕	✕	✕	✕

Machines compatibility				
Reference number				
Reference number with bolted wearplate (WP)	570552	790541	570554	500701
Skid Steer Carriage reference	-	-	-	-
MLA-T 533-145 V+ - ST5	X	X	-	-
MLT 630-115 V CP	X	X	-	-
MLT 635-130 PS+	X	-	X	-
MLT 733-115 LSU	X	X	X	-
MLT 737-130 PS+	X	X	X	X
MLT 741-140 V+	X	X	X	X
MLT 841-145 PS+	X	-	X	X
MLT 850-145 V+	-	-	X	X
MLT 1041-145 PS+L	X	-	X	X

MANDATORY MACHINE EQUIPMENT: ✕





AGRICULTURAL MULTIFUNCTION GRAB BUCKET - WE



- Welded teeth -WE.
- Handling materials with a density $\leq 1000 \text{ kg/m}^3$ / 62 lb/ft^3 .
- Dismountable sides, spill guard and 500 HB bolt-on cutting edge standard.
- Reinforced construction (base, blade and grab).
- Nitritized cylinders, all pins with "construction type" mounting.

[The 3D picture at the top of this page is the reference BG 1850 / 1050 DA WE - 52647326].

- Robust and versatile bucket suitable for dairy use and different agricultural applications.
- Complete opening $>90^\circ$ and powerful jaw allows working flush with walls.
- Perfect for handling wet manure, silage....
- Must-have tool for livestock farm.



	BG 1500 / 600 WE	BG 1500 / 850 WE	BG 1850 / 1050 DA WE	BG 2100 / 1200 WE	BG 2300 / 1350 WE	BG 2450 / 1400 WE	BG 2450 / 1700 WE
Distance to center of gravity (in)	1' 2"	1' 5"	1' 6"	1' 4"	1' 4"	1' 4"	3' 4"
Capacity (lb)	1213	1874	2335	2646	2943	3144	3737
Heaped capacity (US gal)	145	225	280	317	353	377	448
Struck capacity (US gal)	90	138	172	195	215	229	304
Overall weight (lb)	842	1279	1534	1642	1731	1792	1973
Overall length (in)	3' 9"	4' 2"	4' 3"	4' 2"	4' 2"	4' 2"	4' 6"
Width (in)	4' 11"	4' 11"	6' 1"	6' 11"	7' 7"	8'	8'
Closed grapple height (in)	2' 7"	3' 5"	3' 5"	3' 5"	3' 5"	3' 5"	3' 8"
Opened grapple height (in)	4' 9"	5' 10"	5' 10"	5' 10"	5' 10"	5' 10"	6' 6"
Required machine equipment		 		 	 	 	 
Teeth	6	6	7	8	8	8	9
Minimum forks spread (in)	11"	11"	11"	11"	1'	1' 1"	11"
Maximum forks spread (in)	11"	11"	11"	11"	1'	1' 1"	11"
Bolted wearplate (LDR)	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Wear plate hardness	500	500	500	500	500	500	500

Machines compatibility							
Reference number	-	52651959	52647326	52647328		52647332	52549720
Skid Steer Carriage reference	-	52651960	-	-	-	-	-
All-Tach®	52736705	-	-	-	-	-	-
4 point Carriage		-	-	-	-	-	-
Euro Carriage		-	-	-	-	-	-
GCT 3-14	X	-	-	-	-	-	-
GCT 3-14 +	X	-	-	-	-	-	-
MLA-T 533-145 V+ - ST5	-	-	-	-	X	X	X
MLT 420-60 H	-	X	-	-	-	-	-
MLT 625-75 H	-	-	X	-	-	-	-
MLT 630-115 V CP	-	-	-	X	X	X	-
MLT 635-130 PS+	-	-	-	-	-	X	X
MLT 733-115 LSU	-	-	-	-	-	X	X
MLT 737-130 PS+	-	-	-	-	-	X	X
MLT 841-145 PS+	-	-	-	-	-	X	X
MLT 850-145 V+	-	-	-	-	-	-	X
MLT 1041-145 PS+L	-	-	-	-	-	X	X
ULM 412 H	X	-	-	-	-	-	-
ULM 415 H	X	-	-	-	-	-	-
ULM 415 H	X	-	-	-	-	-	-

MANDATORY MACHINE EQUIPMENT: 



BUCKET 4 IN 1



- 4 in 1 bucket suitable for handling materials with a density 2100 kg/m³ / 131 lb/ft³.
- Rear bolted counter blade dedicated to levelling.
- Claws fitted on the mobile part's back side help handling cylindrical objects such as poles, tubes etc.
- Reinforced structure (base, blade and sides).
- Versatile and very robust bucket.
- Designed for executing different works :
 - > Loading and unloading operations
 - > Levelling grounds
 - > Backfilling trenches
 - > Object clamping



	B4x1 340 / 1500	CB4x1 400L / 1500	CB4x1 700L / 1950	CB4x1 850L / 2300	CB4x1 900L / 2450
Distance to center of gravity (in)	1'	1' 5"	1' 2"	1' 3"	1' 3"
Capacity (lb)	1554	1861	3241	3931	4162
Heaped capacity (US gal)	89	106	185	224	237
Struck capacity (US gal)	69	83	138	166	178
Overall weight (lb)	752	1179	1340	1504	1574
Overall height (in)	2' 10"	2' 11"	2' 11"	2' 11"	2' 11"
Overall length (in)	3' 2"	3' 8"	3' 8"	3' 8"	3' 8"
Width (in)	5'	5'	6' 5"	7' 7"	8'
Required machine equipment					
Teeth	4	4	5	6	7

Machines compatibility					
Reference number	-				751465
Reference number TSDL	-	-	-		
Skid Steer Carriage reference			-	-	-
4 point Carriage		-	-	-	-
Euro Carriage		-	-	-	-
GCT 3-14	X	-	-	-	-
GCT 3-14 +	X	-	-	-	-
MLT 420-60 H	-	X	-	-	-
MLT 625-75 H	-	-	X	-	-
MLT 635-130 PS+	-	-	-	-	X
MLT 733-115 LSU	-	-	-	-	X
MLT 737-130 PS+	-	-	-	-	X
MLT 741-140 V+	-	-	-	-	X
MLT 841-145 PS+	-	-	-	-	X
MLT 850-145 V+	-	-	-	-	X
MLT 1041-145 PS+L	-	-	-	-	X
MT 420 H	-	X	-	-	-
MT 625 H	-	-	X	-	-
MT 625 H Comfort	-	-	X	-	-
MT 730 H	-	-	X	-	-
MT 733 Easy OLD	-	-	-	-	X
MT 735 75D ST5	-	-	-	X	X
MT 930 H	-	-	X	-	-
MT 1440 ST5	-	-	-	X	X
MT 1840 A 100D ST5 S1	-	-	-	X	X
MT 1840 ST5	-	-	-	X	X
RS 4-14	-	X	-	-	-
ULM 412 H	X	-	-	-	-
ULM 415 H	X	-	-	-	-
ULM 415 H	X	-	-	-	-

MANDATORY MACHINE EQUIPMENT: 



ENVIRONMENT BUCKET



- Extensive use of high resistance steel: body made of S355 steel, side knives, 500 HB lower wear pads and bolt-on blades. 3° angle between the bolt-on blade & the bucket's floor for more longevity.
- Massive structure adapted to the recycling conditions (carriage, bottom, body).
- Integrated spill guard to limit material loss while traveling.
- Max. material density: 1000 kg/m³ / 62lb/ft³.
- Bucket developed for a severe, daily use.
- Ideal attachment for the handling of bulk materials (paper, crushed green waste).
- Flat bottom for an easy penetration in the waste pit & an efficient unloading.




	BEN 2500 / 3000 WP	CBA 2450 / 2200 EN	CBA 2500 / 3200 EN
Distance to center of gravity (in)	2' 3"	2' 1"	2' 2"
Capacity (lb)	6393	4903	7048
Heaped capacity (US gal)	766	588	845
Struck capacity (US gal)	608	362	656
Overall weight (lb)	2271	2008	2447
Overall height (in)	4' 4"	4'	4' 8"
Overall length (in)	5' 9"	4' 11"	5' 8"
Width (in)	8' 2"	8'	8' 2"
Required machine equipment	✕	✕	✕
Bolted wearplate (LDR)	Standard	Standard	Standard
Wear plate hardness	500	500	500

Machines compatibility			
Reference number			52000125
MLA-T 533-145 V+ - ST5	-	X	-
MLT 635-130 PS+	-	X	-
MLT 733-115 LSU	-	X	-
MLT 737-130 PS+	-	X	-
MLT 741-140 V+	-	X	-
MLT 841-145 PS+	-	X	-
MLT 850-145 V+	X	-	X
MLT 961-160 V+ L	-	-	X
MLT 1041-145 PS+L	-	X	-

MANDATORY MACHINE EQUIPMENT: ✕



ENVIRONMENT GRAB BUCKET

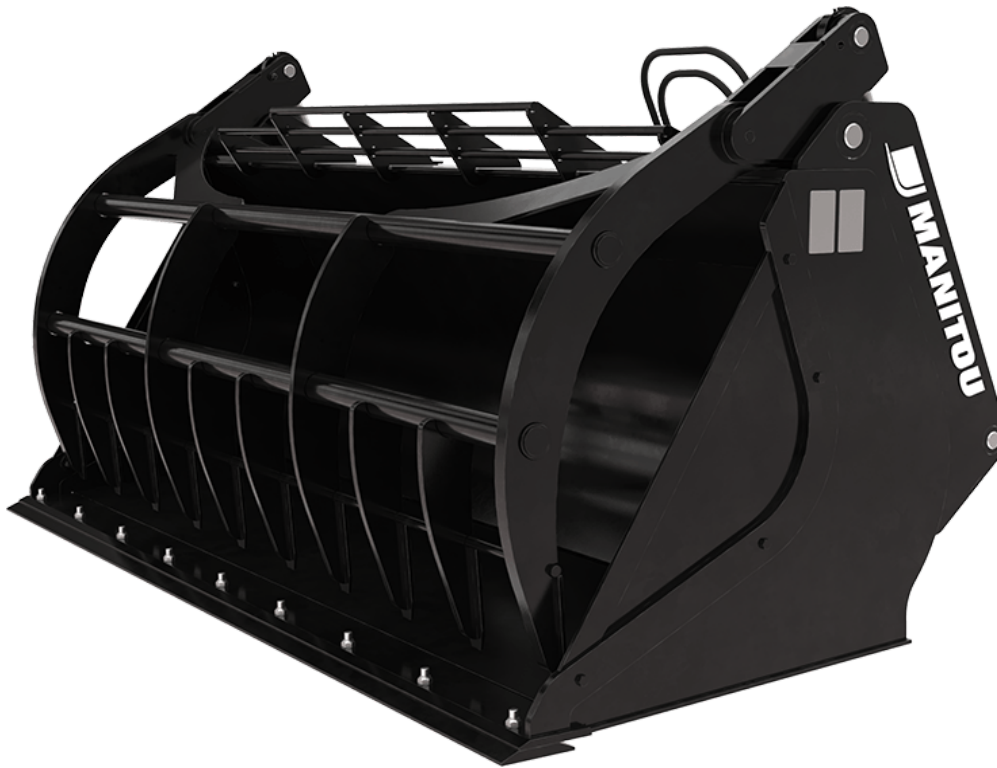

- Strong welded teeth.
- Handling bulk materials with a density $\leq 1000 \text{ kg/m}^3$ / 62 lb/ft³.
- 500 HB bolted cutting edge.
- Additional welded plate on grab's teeth (WB: Welded Blade reference).
- Additional cutting blade, for paper applications, on grab's teeth (WBP: Welded Blade Paper reference).

[The 3D picture at the top of this page is the reference CBG 2450 / 1600 EN - 52000563].

- Allows a massive work output in waste handling.
- Ideal attachment for the handling of bulk materials (paper, crushed green waste, etc.).
- Perfect for work on concrete, asphalt etc.
- Reinforced bucket for intensive waste applications.

	CBG 2450 / 1600 EN	CBG 2450 / 1600 EN WB	CBG 2480 / 2200 EN	CBG 2480 / 2200 EN WBP
Distance to center of gravity (in)	-	2'	2' 2"	2' 2"
Capacity (lb)	3457	3457	4850	4850
Heaped capacity (US gal)	414	414	581	581
Struck capacity (US gal)	333	333	396	396
Overall weight (lb)	2041	2088	2866	2954
Overall length (in)	4' 2"	4' 2"	5' 1"	5' 1"
Width (in)	8'	8'	8' 2"	8' 2"
Opened grapple height (in)	6' 2"	6' 2"	7' 10"	7' 10"
Required machine equipment				
Teeth	10	10	5	5
Bolted wearplate (LDR)	Standard	Standard	Standard	Standard
Wear plate hardness	500	500	500	500

Machines compatibility				
Reference number			790657	
ALT950	X	-	-	-
MHT 790 Mining ST5	-	-	X	-
MHT 790 ST5	-	-	X	-
MLA-T 533-145 V+ - ST5	X	-	-	-
MLT 635-130 PS+	X	X	-	-
MLT 733-115 LSU	X	X	-	-
MLT 737-130 PS+	X	X	-	-
MLT 741-140 V+	X	X	-	-
MLT 841-145 PS+	X	X	-	-
MLT 850-145 V+	X	-	X	X
MLT 961-160 V+ L	-	-	X	X
MLT 1041-145 PS+L	X	X	-	-


MANDATORY MACHINE EQUIPMENT: 



GENERAL PURPOSE BUCKET



- Wide range of bucket capacities.
- Recovery bucket suitable for handling materials with a density $\leq 2100 \text{ kg/m}^3 / 131 \text{ lb/ft}^3$.
- Reinforced structure (base, blade, sides).
- Optional "LDR" 500 HB bolt-on wear plate.
- TSDL : Bucket to be used on machines equipped with an integrated side shift carriage.
- General purpose attachment for a daily use.
- Basic attachment for loading and unloading operations.
- Robust and easy to use this bucket meets the needs of very different work fields.
- Ideal bucket for handling bulk materials: sand & gravel, earth, broken glass etc.




	CBR 600 / 1500	CBR 730 / 1850	CBR 780 / 1950	CBR 850 / 2100	CBR 900 / 2250	CBR 1000 / 2450	CBR 1000 / 2500
Capacity (lb)	2698	3402	3602	3902	4184	4583	4630
Heaped capacity (US gal)	154	194	206	223	239	262	264
Struck capacity (US gal)	129	158	175	181	194	212	217
Overall weight (lb)	604	701	723	789	794	840	1464
Overall height (in)	2' 7"	2' 7"	2' 7"	2' 7"	2' 7"	2' 7"	2' 8"
Overall length (in)	2' 9"	2' 8"	2' 8"	2' 9"	2' 8"	2' 8"	3' 2"
Width (in)	4' 11"	6' 1"	6' 5"	6' 11"	7' 5"	8'	8' 2"
Required machine equipment	✕	✕	✕	✕	✕	✕	✕
Bolted wearplate (LDR)	Not Standard	Not Standard	Not Standard	Not Standard	Not Standard	Not Standard	Standard

Machines compatibility							
Reference number	570614	571831	570613		653749		-
Reference number with bolted wearplate (WP)		52000369	-	-	-	52000370	
Reference number TSDL	-	-	-	-			-
Skid Steer Carriage reference	52000783	-	-	-	-	-	-
MLA-T 533-145 V+ - ST5	-	-	-	-	-	X	-
MLT 420-60 H	X	-	-	-	-	-	-
MLT 625-75 H	-	X	-	-	-	-	-
MLT 630-115 V CP	-	-	-	X	X	-	-
MLT 635-130 PS+	-	-	-	-	-	X	-
MLT 733-115 LSU	-	-	-	-	-	X	-
MLT 737-130 PS+	-	-	-	-	-	X	-
MLT 741-140 V+	-	-	-	-	-	X	-
MLT 841-145 PS+	-	-	-	-	-	X	-
MLT 850-145 V+	-	-	-	-	-	X	-
MLT 961-160 V+ L	-	-	-	-	-	-	X
MLT 1041-145 PS+L	-	-	-	-	-	X	-
MT 420 H	X	-	-	-	-	-	-
MT 625 H	-	X	-	-	-	-	-
MT 625 H Comfort	-	X	-	-	-	-	-
MT 730 H	-	-	X	-	-	-	-
MT 733 Easy OLD	-	-	-	-	-	X	-
MT 735 75D ST5	-	-	-	-	X	X	-
MT 930 H	-	-	X	-	-	-	-
MT 1440 ST5	-	-	-	-	X	X	-
MT 1840 A 100D ST5 S1	-	-	-	-	X	X	-
MT 1840 ST5	-	-	-	-	X	X	-

MANDATORY MACHINE EQUIPMENT: ✕



GENERAL PURPOSE BUCKET (MHT)

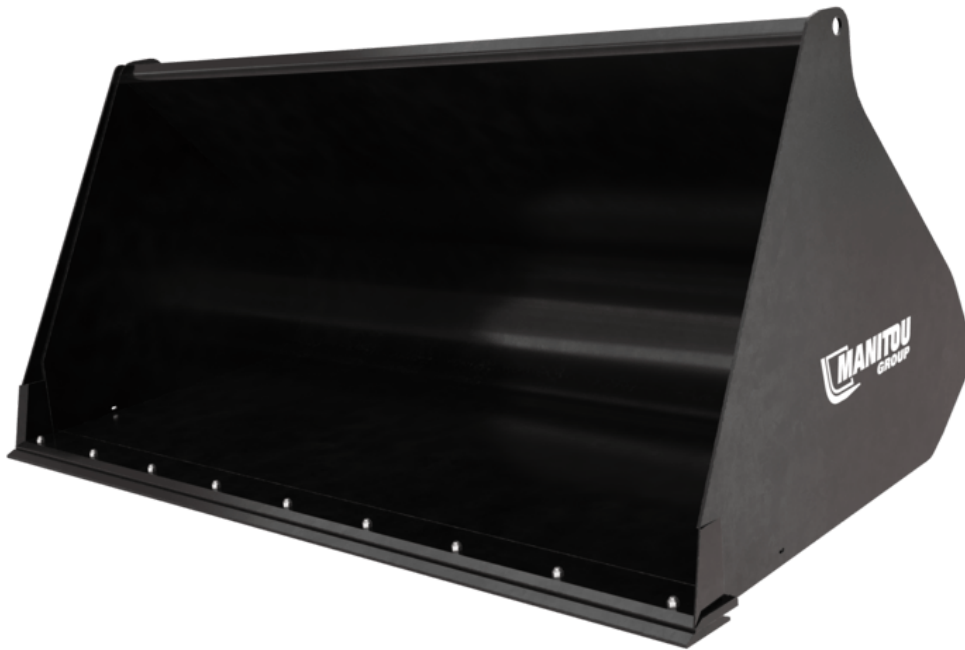

- Strong attachments for a long lasting life.
- 500 HB bolted wear plate.
- High-resistance general purpose buckets adapted to the power of MHT heavy telehandlers.

	CBR 1000 / 2500	CBR 1500 / 2500	CBR 2000 / 2500 LDR MHT
Distance to center of gravity (in)	1' 6"	1' 7"	1' 7"
Capacity (lb)	4630	6945	9259
Heaped capacity (US gal)	264	396	528
Struck capacity (US gal)	217	322	478
Overall weight (lb)	1528	1190	2041
Overall height (in)	2' 7"	3' 1"	3' 10"
Overall length (in)	3' 3"	3' 11"	4' 8"
Width (in)	8' 2"	8' 2"	8' 2"
Required machine equipment	✕	✕	✕
Bolted wearplate (LDR)	Standard	Standard	Standard

Machines compatibility			
Reference number E-RECO			52000532
MHT 790 Mining ST5	X	X	-
MHT 790 ST5	X	X	-
MHT 10135 ST5	-	-	X
MHT 10160 ST5	-	-	X
MHT 10200 ST5	-	-	X
MHT 11250 Mining ST5	-	-	X
MHT 11250 ST5	-	-	X

MANDATORY MACHINE EQUIPMENT: ✕



GENERAL PURPOSE BUCKET ESSENTIAL



- Capacity: 400 L / 14 ft³ up to 1000L / 35 ft³.
- For material density up to 2100 kg/m³ / 131 lb/ft³.
- Simplified structure with straight sides.
- Integrated level indicator.
- No side strengthener.

- A bucket for all construction applications.
- Dedicated to heavy bulk: sand, earth, stones, gravels, etc.
- Tested at the R&D Center on high demanding applications.
- Designed and validated by Manitou.

[The 3D picture at the top of this page is the reference BGP 2000 / 800 Essential - 52688160].




	BGP 1500 / 400 Essential	BGP 1850 / 750 Essential	BGP 2000 / 800 Essential	BGP 2300 / 900 Essential	BGP 2450 / 1000 Essential
Distance to center of gravity (in)	1' 4"	1' 5"	1' 5"	1' 5"	1' 5"
Capacity (lb)	1823	3417	3713	4310	4605
Heaped capacity (US gal)	104	195	212	246	263
Struck capacity (US gal)	82	152	164	190	202
Overall weight (lb)	355	719	761	836	875
Overall height (in)	2' 1"	2' 7"	2' 7"	2' 7"	2' 7"
Overall length (in)	2' 8"	3' 2"	3'	3' 2"	3'
Width (in)	4' 11"	6' 1"	6' 7"	7' 7"	8'
Depth (in)	2' 1"	2' 8"	2' 8"	2' 8"	2' 8"
Required machine equipment	×	×	×	×	×

Machines compatibility					
Reference number	-				
All-Tach®	52702290	-	-	-	-
4 point Carriage		-	-	-	-
Euro Carriage		-	-	-	-
GCT 3-14	X	-	-	-	-
GCT 3-14 +	X	-	-	-	-
MLT 630-115 V CP	-	-	X	-	-
MLT 635-130 PS+	-	-	-	-	X
MLT 733-115 LSU	-	-	-	-	X
MLT 737-130 PS+	-	-	-	-	X
MLT 741-140 V+	-	-	-	-	X
MLT 841-145 PS+	-	-	-	-	X
MLT 1041-145 PS+L	-	-	-	-	X
MT 625 H	-	X	-	-	-
MT 625 H Comfort	-	X	-	-	-
MT 730 H	-	-	X	-	-
MT 733 Easy OLD	-	-	X	X	X
MT 735 75D ST5	-	-	X	-	X
MT 930 H	-	-	X	-	-
MT 1440 ST5	-	-	X	X	X
MT 1840 A 100D ST5 S1	-	-	X	X	X
MT 1840 ST5	-	-	X	X	X
ULM 412 H	X	-	-	-	-
ULM 415 H	X	-	-	-	-
ULM 415 H	X	-	-	-	-

MANDATORY MACHINE EQUIPMENT: ×



HIGH CAPACITY AGRICULTURAL BUCKET

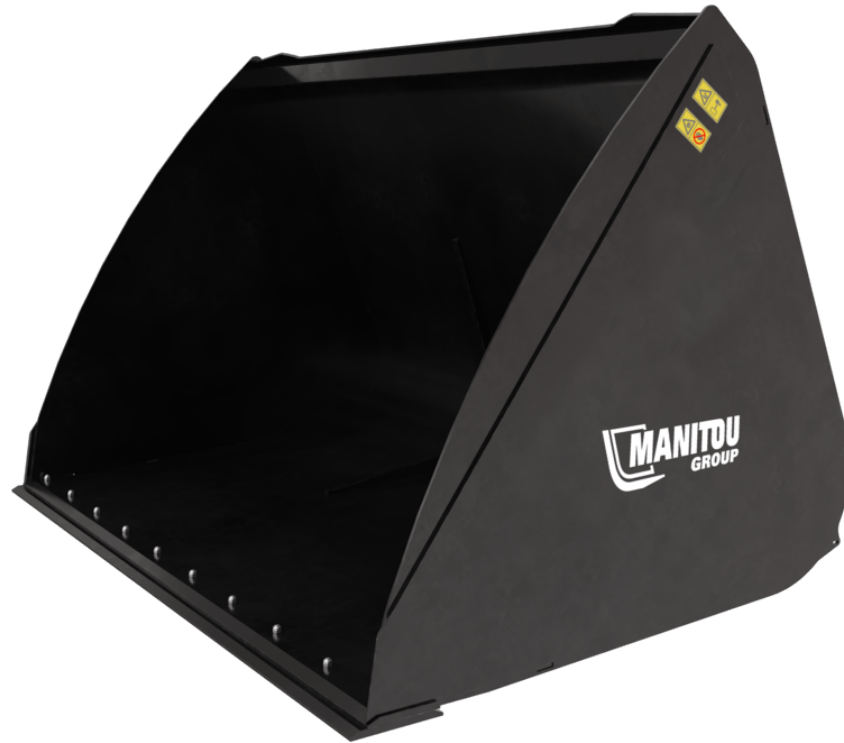

- Bulk product bucket suitable for handling materials with a density $\leq 1000 \text{ kg/m}^3$ / 62 lb/ft³.
- Reinforced structure (base, blade and sides).

[The 3D picture at the top of this page is the reference CBA 2700 / 4500 LDR - 52000508].

- Ideal bucket for bulk products (cereals, woodchip, mineral feed etc.)
- Modern design with maximal rigidity and resistance.
- Shape designed with 3° angle for quick loading and unloading operation.
- 500HB bolt-on cutting edge (LDR) for more longevity.



	CBA 2500 / 4000 LDR	CBA 2700 / 4500 LDR
Distance to center of gravity (in)	2'	1' 11"
Capacity (lb)	7066	8025
Heaped capacity (US gal)	1059	1202
Struck capacity (US gal)	844	956
Overall weight (lb)	2888	3086
Overall height (in)	5' 4"	5' 6"
Overall length (in)	6' 3"	6' 3"
Width (in)	8' 2"	8' 10"
Depth (in)	5' 7"	5' 7"
Required machine equipment	✕	✕
Wear plate hardness	500	500

Machines compatibility		
Reference number with bolted wearplate (WP)	52603178	52000508
MLT 850-145 V+	X	X
MLT 961-160 V+ L	X	X

MANDATORY MACHINE EQUIPMENT: ✕



HIGH CAPACITY AGRICULTURAL GRAB BUCKET



- Welded teeth - WE.
- Handling materials with a density $\leq 1000 \text{ kg/m}^3$ / 62 lb/ft³.
- 500 HB bolt-on cutting edge in standard.
- Reinforced bucket: improved material grip on sides & top Increased struck capacity (1500 L / 53 ft³).

[The 3D picture at the top of this page is the reference CBG 2480 / 2600 MS - 790658].

- Robust and versatile bucket suitable for massive agricultural applications.
- Reinforced bucket for a massive work output in agricultural applications.
- Ideal to handle cereals and other bulk materials.



	CBG 2480 / 2000 MS	CBG 2480 / 2600 MS
Distance to center of gravity (in)	1' 3"	1' 3"
Capacity (lb)	4409	5732
Heaped capacity (US gal)	528	687
Struck capacity (US gal)	396	396
Overall weight (lb)	2701	2992
Overall length (in)	4' 11"	5' 6"
Width (in)	8' 2"	8' 2"
Closed grapple height (in)	4' 11"	4' 11"
Opened grapple height (in)	7' 6"	8' 1"
Required machine equipment	 	 
Teeth	6	7
Minimum forks spread (in)	1' 6"	1' 2"
Maximum forks spread (in)	1' 6"	1' 2"
Wear plate hardness	500	500

Machines compatibility		
Reference number with bolted wearplate (WP)		790658
MLT 841-145 PS+	X	-
MLT 850-145 V+	X	X
MLT 961-160 V+ L	-	X
MLT 1041-145 PS+L	X	-

MANDATORY MACHINE EQUIPMENT: 



LIGHT MATERIAL BUCKET



- Suited for bulk materials with a density $< 0.8 \text{ t/m}^3$ / 50 lb/ft^3 .
- 400 HB cutting edge for more resistance.
- High capacity for efficient loading applications.

[The 3D picture at the top of this page is the reference BLM 1500 / 770 - 52706270].

	BLM 1500 / 770
Distance to center of gravity (in)	1' 7"
Capacity (lb)	1345
Heaped capacity (US gal)	202
Struck capacity (US gal)	162
Overall weight (lb)	461
Overall height (in)	2' 7"
Overall length (in)	4'
Width (in)	4' 11"
Required machine equipment	×

Machines compatibility	
All-Tach®	52706270
4 point Carriage	
Euro Carriage	
GCT 3-14	X
GCT 3-14 +	X
ULM 412 H	X
ULM 415 H	X
ULM 415 H	X



MANDATORY MACHINE EQUIPMENT: ×



LIGHT MATERIAL BUCKET (MHT)



- Max. density 1000 kg/m³ / 62 lb/ft³.
- 500 HB bolted wear plate.
- High-resistance light material buckets adapted to the power of MHT heavy telehandlers.



	CBA 2000 / 2500 LDR	CBA 2500 / 4000 LDR MHT	CBA 3000 / 2500 LDR	CBA 4000 / 2500 LDR
Distance to center of gravity (in)	1' 11"	2' 4"	2' 1"	2'
Capacity (lb)	4431	8818	6665	8834
Heaped capacity (US gal)	531	1057	799	1059
Struck capacity (US gal)	392	903	619	844
Overall weight (lb)	1497	3175	1839	2890
Overall height (in)	3' 10"	5' 7"	4' 4"	5' 4"
Overall length (in)	4' 6"	6' 9"	5' 5"	6' 3"
Width (in)	8'	8' 2"	8' 2"	8' 2"
Required machine equipment	✕	✕	✕	✕
Bolted wearplate (LDR)	Standard	Standard	Standard	Standard

Machines compatibility				
Reference number E-RECO				
MHT 790 Mining ST5	X	-	X	X
MHT 790 ST5	X	-	X	X
MHT 10135 ST5	-	X	-	-
MHT 10160 ST5	-	X	-	-
MHT 10200 ST5	-	X	-	-
MHT 11250 Mining ST5	-	X	-	-
MHT 11250 ST5	-	X	-	-




MANDATORY MACHINE EQUIPMENT: ✕



LIGHT MATERIAL BUCKET (MRT)



- Bucket dedicated to the handling of light materials ($< 1000 \text{ kg/m}^3$ / 62 lb/ft^3).
- Reinforced structure (base, blade and sides).
- Usually placed in from on a window/ an opening on a deconstructed building to load rubbles.
- Especially usefull for deconstruction applications: the wide opening of this bucket prevents rubbles & misc. materials from falling to the ground.
- Designed to suit to MRT's specific boom head position.
- Note: rotating telehandlers are not designed for intensive loading applications.



	CBA 1500 / 2450
Distance to center of gravity (in)	2' 3"
Capacity (lb)	3371
Heaped capacity (US gal)	404
Struck capacity (US gal)	291
Overall weight (lb)	1166
Overall height (in)	3' 3"
Overall length (in)	3' 10"
Width (in)	8'
Required machine equipment	✕

Machines compatibility	
Reference number E-RECO	921279
MRT 1845 115	X
MRT 2145 115	X
MRT 2260	X
MRT 2260 e	X
MRT 2545 115	X
MRT 2570	X
MRT 2660	X
MRT 2660 e	X
MRT 3060	X
MRT 3570	X
MRT 3570 ES	X

MANDATORY MACHINE EQUIPMENT: ✕



BALE CLAMP CLASSIC



- 2x4 or 2x3 teeth.
- Synchronized closure.
- Excellent lifting capacity of 1000 kg / 2205 lb or 1200 kg / 2646 lb at 800 mm / 31 lb.
- Handles 1 round bales Ø 1,8 m / 6 ft max. for the 2x4 and Ø 1,5 m / 5 ft to 2 m / 7 ft for the 2x3.
- Handles 2 rectangular bales of maximum 0,8 m / 3 ft high per bale.

[The 3D picture at the top of this page is the reference CLBR 2x3 - 52001013].

- Easy to use and efficient attachment.
- Handles 1 round bale or 2 rectangular bales at the same time.
- Rounded teeth in wrought iron that offer an accurate and clean penetration on materials.
- Optional: 2 lower teeth (680 mm / 27 in, Ø 35 mm / 1 in) that ensure a perfect stability while handling rectangular bales.

	CLBR 2x3	PBG 2x4
Capacity (lb)	2646	3968
Overall weight (lb)	518	518
Overall height (in)	4' 6"	4' 6"
Overall length (in)	3' 7"	3' 5"
Forks length (in)	1' 1"	1' 1"
Width (in)	3' 7"	3' 7"
Arm length (in)	2' 4"	2'
Required machine equipment	 	 
Teeth / Fingers	2 / 3	2 / 4
Minimum opening (in)	7"	4"
Maximum opening (in)	6' 5"	5' 10"
Minimum forks spread (in)	1' 1"	1' 2"

Machines compatibility		
Reference number		757612
MLA-T 533-145 V+ - ST5	X	X
MLT 420-60 H	X	X
MLT 625-75 H	X	X
MLT 630-115 V CP	X	X
MLT 635-130 PS+	X	X
MLT 733-115 LSU	X	X
MLT 737-130 PS+	X	X
MLT 741-140 V+	X	X
MLT 841-145 PS+	X	X
MLT 850-145 V+	X	X
MLT 961-160 V+ L	X	X
MLT 1041-145 PS+L	X	X

MANDATORY MACHINE EQUIPMENT: 



BALE CLAMP INTENSIVE



- Rounded forged 2x4 teeth.
- Synchronized closure.
- Impressive lifting capacity of 1800 kg / 3969 lb.
- Handles 1 or 2 round bales: 1.80 m maximum.
- Handles 2 rectangular bale: 1,2 m / 4 ft high.
- Handles 3 rectangular bales: 0,8 m / 3 ft high each.
- Optional: 2 lower tines 680 mm / 27 in Ø 35 mm / 1 in ref. 790521 - spare parts kit.
- Easy and clean handling.
- Time-saver and competitive attachment.
- Handles 2 round bales or 3 rectangular bales at the same time.
- Perfect stability while handling square bales with optional lower tines.

[The 3D picture at the top of this page is the reference P2BG 2x4 - 790518].



	Lower Tines	P2BG 2x4
Capacity (lb)	-	3968
Overall weight (lb)	77	624
Overall height (in)	-	5' 10"
Overall length (in)	2' 3"	3' 5"
Width (in)	-	3' 7"
Arm length (in)	-	2'
Required machine equipment	-	
Teeth / Fingers	2	2 / 4
Minimum opening (in)	-	6"
Maximum opening (in)	-	5' 10"

Machines compatibility		
Reference number		790518
MLA-T 533-145 V+ - ST5	X	X
MLT 630-115 V CP	X	X
MLT 635-130 PS+	-	X
MLT 733-115 LSU	X	X
MLT 737-130 PS+	X	X
MLT 741-140 V+	X	X
MLT 841-145 PS+	X	X
MLT 850-145 V+	X	X
MLT 961-160 V+ L	X	X
MLT 1041-145 PS+L	X	X

MANDATORY MACHINE EQUIPMENT: 



SQUARE BALE CLAMP



- Capacity: 2100 kg / 4631 lb / 5 bales (700 mm / 28 in high).
- Reinforced frame & grab structure for harsh working conditions.
- 2x 7 forged teeth, Ø 25 mm / 1 in length 340 mm / 13 in.
- 3x lower tines, Ø 40 mm / 2 in length 1000 mm / 39 in.
- Synchronized closure.

- High capacity & power for intensive straw stacking
- Lateral clamp kinematics: under roof stacking made easy
- Good bale penetration & upholding
- Possible handling & rotation of a single bale.

[The 3D picture at the top of this page is the reference CLBS 2x7 / 2100 - 52000015].



	CLBS 2x7 / 2100
Capacity (lb)	4630
Overall weight (lb)	1676
Overall height (in)	9' 11"
Overall length (in)	5' 3"
Forks length (in)	3' 3"
Width (in)	5' 11"
Required machine equipment	 
Teeth / Fingers	14 / 3
Minimum opening (in)	1' 5"
Maximum opening (in)	5' 2"
3 Round bale max diameter (in)	5' 11"
3 Square bale max height (in)	3' 11"

Machines compatibility	
Reference number	52000015
MLT 841-145 PS+	X
MLT 850-145 V+	X
MLT 961-160 V+ L	X
MLT 1041-145 PS+L	X

MANDATORY MACHINE EQUIPMENT: 



NEW

WOOD CLAMP



- High gripping power with two hydraulic cylinders.
- Special shape of retainer for safe wood handling.

[The 3D picture at the top of this page is the reference CLHW 1200/3 - 52797759].

- Must-have attachment for handling of wood logs and branches.
- Robust structure for heavy work.

	CLHW 1200/3
Capacity (lb)	6614
Overall weight (lb)	1016
Overall height (in)	3' 11"
Overall length (in)	3' 7"
Width (in)	4' 1"
Closed grapple height (in)	3' 11"
Opened grapple height (in)	4' 8"
Minimum diameter / Maximum diameter (in)	1' 6" / 2' 11"
Required machine equipment	 

Machines compatibility	
Reference number	52797759
MLT 850-145 V+	X

MANDATORY MACHINE EQUIPMENT: 



WRAPPED BALE CLAMP



- Self-lubricated anti-wear ring that improves the longevity of the attachment.
- Excellent lifting capacity from 800 kg / 1764 lb up to 1000 kg / 2205 lb.
- Welded monobloc chassis.
- CLBW 800 : handles wrapped bale with Ø from 0,85 m / 3 ft to 1,45 m / 5 ft.
- CLBW 1500 : handles wrapped bale with Ø from 1 m / 3 ft to 1,7 m / 6 ft.
- Easy to use and competitive attachment.
- Powerful double effect cylinder allows the manipulation of very heavy bales.
- Rounded and articulated clamp designed to fit the shape of every bale.
- Smooth structure that avoids any perforation of plastic film.



	CLBW 800	CLBW 1500
Capacity (lb)	1764	3307
Overall weight (lb)	500	553
Overall height (in)	2' 8"	2' 8"
Overall length (in)	4' 7"	4' 11"
Width (in)	5' 2"	5' 2"
Required machine equipment	 	 
Minimum opening (in)	10"	1' 8"
Maximum opening (in)	4' 11"	6' 1"
1 Wrapped bale max diameter (in)	4' 9"	5' 7"
1 Wrapped bale min diameter (in)	2' 9"	3' 3"

Machines compatibility		
Reference number		52001012
MLA-T 533-145 V+ - ST5	-	X
MLT 420-60 H	X	X
MLT 625-75 H	X	X
MLT 630-115 V CP	X	X
MLT 635-130 PS+	X	X
MLT 733-115 LSU	X	X
MLT 737-130 PS+	X	X
MLT 741-140 V+	X	X
MLT 841-145 PS+	-	X
MLT 850-145 V+	-	X
MLT 961-160 V+ L	-	X
MLT 1041-145 PS+L	X	X

MANDATORY MACHINE EQUIPMENT: 



WRAPPED BALE CLAMP (COMPACT MACHINES)



- Self-lubricated anti-wear ring that improves the longevity of the attachment.
- Excellent lifting capacity up to 1000 kg / 2205 lb.
- Welded monobloc chassis.
- Handles wrapped bale with diameter from 1 m / 3 ft to 1,7 m / 6 ft.

[The 3D picture at the top of this page is the reference CLBW 800 - N51502013].

- Easy to use and competitive attachment.
- Powerful double effect cylinder allows the manipulation of very heavy bales.
- Rounded and articulated clamp designed to fit the shape of every bale.
- Smooth structure that avoids any perforation of plastic film.

	CLBW 800
Distance to center of gravity (in)	1' 5"
Capacity (lb)	1764
Overall weight (lb)	500
Overall height (in)	2' 8"
Overall length (in)	4' 4"
Width (in)	5' 2"
Minimum diameter / Maximum diameter (in)	2' 8" / 4' 11"
Required machine equipment	
Minimum opening (in)	10"
Maximum opening (in)	3' 5"

Machines compatibility	
All-Tach® Narrow	
All-Tach®	N51502013
4 point Carriage	
Euro Carriage	
GCT 3-14	X
GCT 3-14 +	X
MLA 5-60 H-Z	X
ULM 412 H	X
ULM 415 H	X
ULM 415 H	X

MANDATORY MACHINE EQUIPMENT: 



CARRIAGE FLOATING LOAD BACKREST AND FORKS (MHT)



- Load backrest standard.
- Fork levelling.
- Solution adapted to uneven ground : floating forks + leveling.

	CAF 2500 / 16 T	CAF 2500 / 20 T	CAF 2500 / 22 T	CAF 2500 / 25 T	CAF 2500 / 12.5 T	TFF 9 T (a)	TFF 9 T (b)
Capacity (lb)	35274	44092	48502	55116	27558	19842	19842
Overall height (in)	5'	5'	5' 4"	5' 4"	5'	4' 7"	3' 3"
Width (in)	8' 2"	8' 2"	8' 4"	8' 4"	8' 2"	5' 2"	7'
Required machine equipment	✕	✕	✕	✕	✕	✕	✕
Minimum forks spread (in)	3' 2"	3' 4"	3' 8"	3' 5"	3' 4"	1' 9"	1' 10"
Maximum forks spread (in)	7' 9"	7' 9"	7' 9"	7' 9"	7' 9"	4' 8"	6' 7"

Available fork dimensions							
200 x 60 x 1200							
180 x 75 x 1200							
200 x 80 x 1200							
200 x 60 x 1500							
180 x 75 x 1500							
180 x 75 x 1800							
200 x 80 x 1800							
220 x 100 x 1800							
200 x 60 x 2000							939349
200 x 85 x 2400							
250 x 100 x 2400							
250 x 100 x 3000							

Machines compatibility							
MHT 790 Mining ST5	-	-	-	-	-	X	X
MHT 790 ST5	-	-	-	-	-	X	X
MHT 10135 ST5	X	-	-	-	X	-	-
MHT 10160 ST5	X	-	-	-	X	-	-
MHT 10200 ST5	-	X	-	-	-	-	-
MHT 11250 Mining ST5	-	-	X	X	-	-	-
MHT 11250 ST5	-	-	X	X	-	-	-

MANDATORY MACHINE EQUIPMENT: ✕



CARRIAGE FLOATING LOAD BACKREST AND FORKS (MRT)



- Load backrest standard.
- Fork levelling.
- Fork travel lock possible - order kit ref. 52675100.
- Solution adapted to uneven ground : floating forks + leveling.

	CAF 1030 / 6 T	CAF 1030 / 7 T	CAF 1030 / 4.5 T	CAF 1800 / 7 T	TFF 4.5 T
Capacity (lb)	13228	15432	9921	15432	9921
Overall height (in)	3' 4"	3' 5"	4' 2"	3' 6"	4' 2"
Width (in)	3' 8"	3' 8"	3' 8"	6' 3"	3' 8"
Required machine equipment	×	×	×	×	×
Minimum forks spread (in)	1' 8"	2'	8"	2'	10"
Maximum forks spread (in)	3' 4"	3' 4"	3' 5"	5' 11"	3' 5"

Available fork dimensions					
125 x 50 x 1200					
100 x 60 x 1200	52658467				
125 x 60 x 1200					
100 x 60 x 1500					
125 x 60 x 1500					
100 x 60 x 1800					
125 x 60 x 1800				52719495	

Machines compatibility					
MRT 1845 115	-	-	X	-	X
MRT 2145 115	-	-	X	-	X
MRT 2260	X	-	-	X	-
MRT 2260 e	X	-	-	X	-
MRT 2545 115	-	-	X	-	X
MRT 2570	-	X	-	X	-
MRT 2660	X	-	-	X	-
MRT 2660 e	X	-	-	X	-
MRT 3060	X	-	-	X	-
MRT 3570	-	X	-	X	-
MRT 3570 ES	-	X	-	X	-


MANDATORY MACHINE EQUIPMENT: ×



CARRIAGE FLOATING LOAD BACKREST AND FORKS (MT - MLT)



- Load backrest standard.
- Fork levelling.
- Fork travel lock possible - order kit ref. 52675100.
- Solution adapted to uneven ground : floating forks + leveling.



	CAF 1000 / 3 LB	CAF 1000 / 3 LB (b)	CAF 1000 / 1.5 LB	CAF 1000 / 4.1 LB	CAF 1300 / 4.1 LB
Distance to center of gravity (in)	1'	10"	7"	11"	10"
Capacity (lb)	6614	6614	3307	9039	9039
Overall weight (lb)	529	560	386	675	783
Overall height (in)	3' 3"	3' 3"	3' 5"	3' 5"	3' 5"
Overall length (in)	4' 6"	4' 10"	4' 6"	5'	5'
Width (in)	3' 3"	3' 3"	3' 10"	3' 10"	4' 8"
Required machine equipment	✕	✕	✕	✕	✕
Minimum forks spread (in)	10"	11"	6"	1' 7"	10"
Maximum forks spread (in)	3'	3'	3'	3' 4"	4' 2"

Available fork dimensions					
100 x 50 x 1070					
75 x 35 x 1100					
120 x 40 x 1200		52744200			
100 x 50 x 1200					52810870

Machines compatibility					
Reference number		52744200	-		52810870
All-Tach®	-	-		-	-
4 point Carriage	-	-		-	-
Euro Carriage	-	-		-	-
GCT 3-14	-	-	X	-	-
GCT 3-14 +	-	-	X	-	-
MLT 420-60 H	X	X	-	-	-
MLT 625-75 H	X	X	-	-	-
MLT 733-115 LSU	-	-	-	X	-
MLT 737-130 PS+	-	-	-	X	-
MLT 741-140 V+	-	-	-	X	-
MLT 841-145 PS+	-	-	-	X	-
MLT 1041-145 PS+L	-	-	-	X	-
MT 420 H	X	X	-	-	-
MT 625 H	X	X	-	-	-
MT 625 H Comfort	X	X	-	-	-
MT 730 H	X	X	-	-	-
MT 733 Easy OLD	-	-	-	-	X
MT 735 75D ST5	-	-	-	X	X
MT 930 H	X	X	-	-	-
MT 1440 ST5	-	-	-	X	X
MT 1840 A 100D ST5 S1	-	-	-	X	X
MT 1840 ST5	-	-	-	X	X
ULM 412 H	-	-	X	-	-
ULM 415 H	-	-	X	-	-
ULM 415 H	-	-	X	-	-

MANDATORY MACHINE EQUIPMENT: ✕



FLOATING FORK CARRIAGE WITH HYDRAULIC LEVELING



- Pin-type floating forks.
- Max. fork spread 1180 mm / 46 in (external fork edge).
- Easy pallet collection & placement with the hydraulic carriage levelling.
- Simplicity & accuracy: levelling with a hydraulic cylinder.

	CAF 1200 / 5 B L	TFF 1230 + Levelling (a)
Distance to center of gravity (in)	1' 4"	10"
Capacity (lb)	11023	10803
Overall weight (lb)	1389	1360
Overall height (in)	4' 4"	4' 8"
Overall length (in)	5' 7"	5' 1"
Width (in)	4' 4"	4' 4"
Required machine equipment	 	 
Minimum forks spread (in)	3' 10"	3' 4"

Available fork dimensions		
125 x 50 x 1200	52762430	

Machines compatibility		
MRT 1845 115	-	X
MRT 2145 115	-	X
MRT 2260	X	-
MRT 2260 e	X	-
MRT 2545 115	-	X
MRT 2570	X	-
MRT 2660	X	-
MRT 2660 e	X	-
MRT 3060	X	-
MRT 3570	X	-
MRT 3570 ES	X	-

MANDATORY MACHINE EQUIPMENT: 



FLOATING FORK CARRIAGE WITH SIDE SHIFT (MT)



- Hydraulic line required to allow fork movement from the cab.
- Pin type forks.
- Bolt-on load backrest for a better longevity.

[The 3D picture at the top of this page is the reference TFF 35 DL 1040 - 751543].

- Floating fork carriage with hydraulic side shift for an efficient load placement.
- Load backrest for a higher load stability.

	TFF 29 DL 1040	TFF 35 DL 1040	TFF 35 DL 1300	TFF 45 DL 1040	TFF 45 DL 1300
Capacity (lb)	6393	7716	7716	9921	9921
Width (in)	3' 5"	3' 5"	4' 3"	3' 5"	4' 3"
Required machine equipment	 	 	 	 	 

Available fork dimensions					
120 x 40 x 1200					
125 x 45 x 1200					
125 x 50 x 1200					751546

Machines compatibility					
MT 730 H	-	X	-	-	-
MT 733 Easy OLD	-	X	-	-	-
MT 735 75D ST5	-	X	-	-	-
MT 930 H	-	X	-	-	-
MT 733 Easy OLD	-	-	X	-	-
MT 1440 ST5	-	-	-	X	X
MT 1840 A 100D ST5 S1	-	-	-	X	X
MT 1840 ST5	-	-	-	X	X

MANDATORY MACHINE EQUIPMENT: 



HEAVY DUTY TILTING FORK POSITIONERS



- Heavy duty design for rough terrain applications.
- Pin type fork positioning.
- Tilting forks.
- Cylinders holders : prevent cylinders from bending in harsh conditions.
- Note : fork spread measured on the outer fork edges.

[The 3D picture at the top of this page is the reference CAT 2500 / 22T + P - 52727776].

- Must-have attachment for MHTs.
- Designed for off-road use, suitable even for the worst working conditions.
- Limited thickness for better residual capacity.
- Maximum component protection.
- Improved visibility for higher working speed.
- Possibility to unlock forks to turn it floating (only 9 t / 19845 lb).



	CAT 2500 / 15T + P	CAT 2500 / 16T + P	CAT 2500 / 20T + P	CAT 2500 / 22T + P	CAT 2500 / 25T + P	CAT 2500 / 12.5T + P	TFF + positionner 9t 2000mm	TFF + positionner 9t 2500mm
Capacity (lb)	33069	35274	44092	48502	55116	27558	19842	19842
Overall height (in)	5' 4"	5' 3"	5' 4"	5' 4"	5' 4"	5' 3"	3' 9"	3' 9"
Width (in)	8' 2"	8' 2"	8' 2"	8' 2"	8' 2"	8' 2"	6' 8"	8' 3"
Required machine equipment	 	 	 	 	 	 	 	 
Minimum forks spread (in)	3' 6"	3' 6"	3' 6"	3' 6"	3' 6"	3' 6"	2'	3' 3"
Maximum forks spread (in)	7' 8"	7' 8"	7' 8"	7' 8"	7' 8"	7' 8"	6' 3"	7' 10"

Available fork dimensions								
200 x 60 x 1200								
200 x 80 x 1200								
200 x 60 x 1500								
200 x 85 x 1500								
200 x 60 x 1800								
200 x 80 x 1800								
200 x 85 x 1800		52727769						
250 x 100 x 1800								
200 x 60 x 2000								
200 x 85 x 2400						52727770		
200 x 95 x 2400								
250 x 100 x 2400								
200 x 95 x 3000								
250 x 100 x 3000								

Machines compatibility								
MHT 790 Mining ST5	-	-	-	-	-	-	X	X
MHT 790 ST5	-	-	-	-	-	-	X	X
MHT 10135 ST5	-	X	-	-	-	X	-	-
MHT 10160 ST5	-	X	-	-	-	X	-	-
MHT 10200 ST5	X	-	X	-	-	-	-	-
MHT 11250 Mining ST5	-	-	-	X	X	-	-	-
MHT 11250 ST5	-	-	-	X	X	-	-	-

MANDATORY MACHINE EQUIPMENT: 



HEAVY DUTY TILTING FORK POSITIONERS WITH SIDE SHIFT



- Heavy duty design for rough terrain applications.
- Pin type fork positioning + variable side shift (constant only 9 T / 19845 lb).
- Pin-type forks inserted into "sliders" (only 9 T / 19845 lb).
- Tilting forks.
- Cylinders holders: prevent cylinders from bending in harsh conditions.
- Note: fork spread measured on the outer fork edges.

[The 3D picture at the top of this page is the reference CAT 2500 / 22T + P+ SS - 52697145].

- Must-have attachment for the MHTs.
- Designed for off-road use, suitable even for the worst working conditions.
- Limited thickness for more capacity.
- Maximum component protection.
- Improved visibility for higher working speed.
- Possibility to unlock forks to turn it floating (only 9 t / 19845 lb).



	CAT 2500 / 15T + P + SS	CAT 2500 / 16T + P + SS	CAT 2500 / 20T + P + SS	CAT 2500 / 22T + P + SS	CAT 2500 / 25T + P + SS
Capacity (lb)	33069	35274	44092	48502	55116
Overall height (in)	5' 4"	5' 3"	5' 5"	5' 5"	5' 5"
Width (in)	8' 2"	8' 2"	8' 2"	8' 2"	8' 2"
Required machine equipment	 	 	 	 	 
Minimum forks spread (in)	3' 6"	3' 6"	3' 6"	3' 9"	3' 9"
Maximum forks spread (in)	7' 8"	7' 8"	7' 8"	7' 8"	7' 8"

Available fork dimensions					
200 x 85 x 1200					
200 x 85 x 1500					
200 x 85 x 1800					
250 x 100 x 1800					52697150
200 x 95 x 2400					
250 x 100 x 2400				52697145	
200 x 95 x 3000					
250 x 100 x 3000					

Machines compatibility					
Reference number E-RECO	-	-	-	-	52697150
MHT 10135 ST5	-	X	-	-	-
MHT 10160 ST5	-	X	-	-	-
MHT 10200 ST5	X	-	X	-	-
MHT 11250 Mining ST5	-	-	-	X	X
MHT 11250 ST5	-	-	-	X	X

MANDATORY MACHINE EQUIPMENT: 

	CAT 2500 / 12.5T + P + SS	CAT 2900 / 33T + P + SS (a)	PF 9T + DL L2000	PF 9T + DL L2500
Capacity (lb)	27558	72753	19842	19842
Overall height (in)	5' 3"	7' 3"	3' 9"	3' 9"
Width (in)	8' 2"	9' 8"	6' 8"	8' 3"
Required machine equipment	 	 	 	 
Minimum forks spread (in)	3' 6"	4'	2'	3' 3"
Maximum forks spread (in)	7' 8"	8' 11"	6' 3"	7' 10"

Available fork dimensions				
200 x 60 x 1200				
200 x 60 x 1500				
200 x 60 x 1800				
250 x 110 x 1800				
200 x 60 x 2000				939359
200 x 85 x 2400				
250 x 110 x 2400				
250 x 110 x 3000				

Machines compatibility				
Reference number E-RECO	-	-	-	-
MHT 790 Mining ST5	-	-	X	X
MHT 790 ST5	-	-	X	X
MHT 10135 ST5	X	-	-	-
MHT 10160 ST5	X	-	-	-
MHT 12330	-	X	-	-

MANDATORY MACHINE EQUIPMENT: 



HYDRAULIC FLOATING FORK POSITIONER



- Hydraulic circuit with pressure limiter
- Fork spread: 275 mm/1010 mm / 11 in/40 in
- Standard load backrest
- Pin-type forks- moved through "sliders"
- Note: fork spread measured on the outer fork edges

[The 3D picture at the top of this page is the reference CAF 1260 / 4500 P - 52000273].

- Must-have attachment for each & any construction site
- 1 model for the complete MT range-advantage for rental fleets
- Time saving: change fork spread from the cab
- Precise hydraulic fork movements for more accuracy
- Floating forks with leveling capacity for rough terrain applications
- Safety: fork travel lock



	CAF 1260 / 4500 P
Distance to center of gravity (in)	1'
Capacity (lb)	9921
Overall weight (lb)	772
Overall height (in)	3' 11"
Overall length (in)	5'
Forks section X Forks width X Forks length (in)	2" X 4" X 3' 11"
Width (in)	4' 3"
Required machine equipment	 
Minimum forks spread (in)	1' 3"
Maximum forks spread (in)	3' 4"

Available fork dimensions	
120 x 50 x 1170	52000273

Machines compatibility	
MT 625 H	X
MT 625 H Comfort	X
MT 730 H	X
MT 733 Easy OLD	X
MT 735 75D ST5	X
MT 930 H	X

MANDATORY MACHINE EQUIPMENT:  



NEW

R-EVOLUTION TILTING FORK CARRIAGE



- Major increase of your MRT's functionality thanks to a continuous 360° fork rotation.
- 2 capacities: Up to 5000 kg / 11025 lb frontal (+/- 15°) and up to 2500 kg / 5513 lb rotated.
- Easy handling of long loads in narrow spaces.
- Space saving: better pallet management= less storage space used.
- Reduce machine movements & maneuvers = Fuel consumption savings.
- Safety: constant monitoring of the load's weight, angle & position ; adaptive overload control according to the load's position; no forward tilting if rotation > 120° and boom lifted over 3 m / 10 ft high.
- Cost saving: limits machine movements & maneuvers = lower fuel consumption.
- Space saving: better pallet management= less storage space used.



	CAT 1200 / 5000 R B
Distance to center of gravity (in)	10"
Max. capacity in front (15°/15°) (lb)	11023
Max Capacity in Rotation (360°) (lb)	5512
Overall weight (lb)	1499
Overall height (in)	3' 8"
Overall length (in)	7' 3"
Width (in)	4' 8"
Required machine equipment	  + 
Rotation 1 (°)	360
Minimum forks spread (in)	1'
Maximum forks spread (in)	4'

Available fork dimensions	
125 x 50 x 1200	52629990

Machines compatibility	
Reference number E-RECO	52629990
MRT 2260	X
MRT 2260 e	X
MRT 2570	X
MRT 2660	X
MRT 2660 e	X
MRT 3060	X
MRT 3570	X
MRT 3570 ES	X

MANDATORY MACHINE EQUIPMENT:   + 




TILTING FORKS CARRIAGE



- Tilting forks.
- Forks compliant with FEM/ISO standard, forks' length according to model.
- Forks are not included in the PFB, order 2 forks (except for CAT 1020 / 1500 + 2 F 100x40x1200 & CAT 1260 / 5T + F 150x50x1200 reference).
- Efficient handling solution.
- Adapted to rough terrain.

[The 3D picture at the top of this page is the reference CAT 1020 / 1500 + 2 F 100x40x1200 - 52706271].



	CAT 1020 / 1500 + 2 F 100x40x1200	CAT 1260 / 5 T + F 150x50x1200	PFB 20N 1020	PFB 25N 1020	PFB 25N 1260	PFB 35N 1260	PFB 35N 1470
Capacity (lb)	3307	11023	4409	5512	5512	7716	7716
Overall weight (lb)	302	895	366	157	176	205	258
Overall height (in)	2' 3"	2' 3"	1' 11"	-	-	-	-
Overall length (in)	4' 6"	4' 11"	-	-	-	-	-
Width (in)	3' 5"	4' 3"	3' 5"	3' 4"	4' 3"	4' 3"	5'
Required machine equipment	✕	✕	✕	✕	✕	✕	✕
Minimum forks spread (in)	8"	1'	9"	-	-	-	-
Maximum forks spread (in)	3' 2"	3' 9"	3' 3"	-	-	-	-

Available fork dimensions							
100 x 40 x 1200			415691				
125 x 45 x 1200				415835		415618	
150 x 50 x 1200		578097					

Machines compatibility							
Reference number	-	52735505				653744	
Skid Steer Carriage reference	-	-	-		-	-	-
All-Tach®		-	-	-	-	-	-
4 point Carriage		-	-	-	-	-	-
Euro Carriage		-	-	-	-	-	-
GCT 3-14	X	-	-	-	-	-	-
GCT 3-14 +	X	-	-	-	-	-	-
MLA-T 533-145 V+ - ST5	-	-	-	-	-	X	-
MLT 420-60 H	-	-	X	-	-	-	-
MLT 625-75 H	-	-	-	X	X	-	-
MLT 630-115 V CP	-	-	-	-	-	X	X
MLT 635-130 PS+	-	-	-	-	-	X	X
MLT 733-115 LSU	-	-	-	-	-	X	X
MLT 850-145 V+	-	X	-	-	-	-	-
MT 420 H	-	-	X	-	-	-	-
MT 625 H	-	-	-	X	X	-	-
MT 625 H Comfort	-	-	-	X	X	-	-
MT 733 Easy OLD	-	-	-	-	-	X	X
MT 735 75D ST5	-	-	-	-	-	X	X
ULM 412 H	X	-	-	-	-	-	-
ULM 415 H	X	-	-	-	-	-	-
ULM 415 H	X	-	-	-	-	-	-

MANDATORY MACHINE EQUIPMENT: ✕

	PFB 35N 1580	PFB 45N 1260	PFB 45N 1670	PFB 45N 2000	PFB 75MT 1750	PFB 75MT 2000	PFB FEM4 1200
Capacity (lb)	7716	9921	9921	9921	16535	16535	13228
Overall weight (lb)	269	437	556	650	-	-	-
Overall height (in)	-	-	-	-	-	-	-
Overall length (in)	-	-	-	-	-	-	-
Width (in)	5' 4"	4' 3"	5' 7"	6' 8"	6'	6' 10"	3' 11"
Required machine equipment	✕	✕	✕	✕	✕	✕	✕
Minimum forks spread (in)	-	-	-	-	-	-	-
Maximum forks spread (in)	-	-	-	-	-	-	-

Available fork dimensions							
125 x 50 x 1200		415652					
200 x 60 x 1200							513110

Machines compatibility							
Reference number		654407					
Skid Steer Carriage reference	-	-	-	-	-	-	-
All-Tach®	-	-	-	-	-	-	-
4 point Carriage	-	-	-	-	-	-	-
Euro Carriage	-	-	-	-	-	-	-
MLT 630-115 V CP	X	-	-	-	-	-	-
MLT 635-130 PS+	X	-	-	-	-	-	-
MLT 733-115 LSU	X	-	-	-	-	-	-
MLT 737-130 PS+	-	-	X	X	-	-	-
MLT 741-140 V+	-	X	X	X	-	-	-
MLT 841-145 PS+	-	X	X	-	-	-	-
MLT 961-160 V+ L	-	-	-	-	X	X	X
MLT 1041-145 PS+L	-	X	X	-	-	-	-
MT 733 Easy OLD	X	-	-	-	-	-	-
MT 735 75D ST5	X	-	-	-	-	-	-
MT 1440 ST5	-	X	-	X	-	-	-
MT 1840 A 100D ST5 S1	-	X	-	X	-	-	-
MT 1840 ST5	-	X	-	X	-	-	-

MANDATORY MACHINE EQUIPMENT: ✕



TILTING FORKS CARRIAGE WITH LOAD BACKREST (MLT - MT)



- Load backrests bolted on «PFB» tilting fork carriages.
- Note: to be used with FEM forks.
- Load backrests stabilize paletized loads during transport.
- Especially useful for high pallets.

	PFB 25N 1020 LB	PFB 25N 1260 LB	PFB 35N 1260 LB	PFB 35N 1470 LB	PFB 45N 1670 LB	PFB 45N 2000 LB
Capacity (lb)	5512	5512	7716	7716	9921	9921
Overall weight (lb)	231	260	287	348	683	794
Overall height (in)	3' 10"	3' 11"	3' 11"	3' 11"	4'	4'
Width (in)	3' 5"	4' 3"	4' 3"	4' 11"	5' 11"	7'
Required machine equipment	✕	✕	✕	✕	✕	✕

Available fork dimensions						
125 x 45 x 1200	52000198	52000199	52000200	52000201		
125 x 50 x 1200						

Machines compatibility						
MLA-T 533-145 V+ - ST5	-	-	X	-	-	-
MLT 625-75 H	X	X	-	-	-	-
MLT 630-115 V CP	-	-	X	X	-	-
MLT 635-130 PS+	-	-	X	X	-	-
MLT 733-115 LSU	-	-	X	X	-	-
MLT 737-130 PS+	-	-	-	-	X	X
MLT 741-140 V+	-	-	-	-	X	X
MLT 841-145 PS+	-	-	-	-	X	X
MLT 1041-145 PS+L	-	-	-	-	X	X
MT 625 H	X	-	-	-	-	-
MT 625 H Comfort	X	-	-	-	-	-
MT 733 Easy OLD	-	-	X	X	-	-
MT 735 75D ST5	-	-	X	X	-	-
MT 1440 ST5	-	-	-	-	X	X
MT 1840 A 100D ST5 S1	-	-	-	-	X	X
MT 1840 ST5	-	-	-	-	X	X

MANDATORY MACHINE EQUIPMENT: ✕



TILTING FORKS CARRIAGE WITH SIDE SHIFT - LOAD BACKREST (MLT - MT)



- Bolt-on load backrest for a higher load stability.
- Note: to be used with FEM forks.
- Tilting fork carriage with hydraulic side shift and load backrest for efficient high/bulky load placement.
- Guarantees an accurate and efficient positioning of the handled palets.

	PBF 45N 1670 SS LB	PFB 25N 1020 SS LB	PFB 35N 1260 SS LB
Capacity (lb)	9921	5512	7716
Overall weight (lb)	1312	375	463
Overall height (in)	4' 2"	4'	4'
Width (in)	5' 11"	3' 5"	4' 3"
Required machine equipment	 	 	 

Available fork dimensions			
125 x 45 x 1200			52000205
125 x 50 x 1200			

Machines compatibility			
MLA-T 533-145 V+ - ST5	-	-	X
MT 625 H	-	X	-
MT 625 H Comfort	-	X	-
MT 733 Easy OLD	-	-	X
MT 735 75D ST5	-	-	X
MT 1440 ST5	X	-	-
MT 1840 A 100D ST5 S1	X	-	-
MT 1840 ST5	X	-	-

MANDATORY MACHINE EQUIPMENT: 



SQUARE BALE FORKS



- 700 kg to 1700 kg / 3749 lb capacity.
- Holding tines (without tools) for road traffic.
- Holding upper frame, easy under roof operations.
- 2 tines, Ø 35 mm / 1 in, 950 mm / 37 in working length.
- 4 tines, Ø 45 mm / 2 in, 1010 mm / 40 in working length.
- Efficient and economical square bale handling solution.
- Simultaneous handling of 1 or 4 square bales (height : 800 mm / 31 in).
- Good bale upholding.
- FB 950/700 : load backrest included for a better stability of the load.
- Attachment adapted to road traffic.



	FB 950 / 700 LB	FB 1900 / 1700
Capacity (lb)	1543	3748
Overall weight (lb)	190	474
Overall height (in)	3' 1"	7' 4"
Overall length (in)	4' 2"	4' 5"
Forks length (in)	3' 1"	3' 4"
Forks spread (in)	3' 2"	2'
Width (in)	3' 8"	6' 2"
Required machine equipment	✕	✕
Teeth	2	4

Machines compatibility		
Reference number		790699
MLA-T 533-145 V+ - ST5	-	X
MLT 420-60 H	X	-
MLT 625-75 H	-	X
MLT 630-115 V CP	-	X
MLT 635-130 PS+	-	X
MLT 733-115 LSU	-	X
MLT 737-130 PS+	-	X
MLT 841-145 PS+	-	X
MLT 850-145 V+	-	X
MLT 961-160 V+ L	-	X
MLT 1041-145 PS+L	-	X

MANDATORY MACHINE EQUIPMENT: ✕



2-HOOK JIB



- 2 capacity / outreach couples.
- Safety: homologated swivel self locking hook.

[The 3D picture at the top of this page is the reference P 4000 - 921321].

- Robust solution for handling suspended loads.
- Jib fitted with 2 hooks to meet various needs of building sites.
- Adaptability for all yard handling applications



	P 4000	P 6000
Distance to center of gravity (in)	2' 7"	3' 1"
Capacity (lb)	8818	13228
Capacity 2 (lb)	2646	4409
Overall weight (lb)	463	622
Maximum outreach (in)	2' 4"	2' 8"
Maximum outreach 2 (in)	8' 11"	8' 11"
Overall length (in)	9' 4"	9' 4"
Width (in)	2' 9"	2' 9"
Required machine equipment	✕	✕

Machines compatibility		
Reference number	653226	-
MT 625 H	X	-
MT 625 H Comfort	X	-
MT 730 H	X	-
MT 733 Easy OLD	X	-
MT 735 75D ST5	X	-
MT 930 H	X	-
Reference number E-RECO	921321	921322
MRT 1845 115	X	X
MRT 2145 115	X	X
MRT 2260	X	X
MRT 2260 e	X	X
MRT 2545 115	X	X
MRT 2570	X	X
MRT 2660	X	X
MRT 2660 e	X	X
MRT 3060	X	X
MRT 3570	X	X
MRT 3570 ES	X	X

MANDATORY MACHINE EQUIPMENT: ✕




3-HOOK JIB



- 3 capacity / outreach couples.
- Safety: homologated swivel self locking hook.

[The 3D picture at the top of this page is the reference P 25 T - 53010431].

- Perfect attachments for all heavy suspended loads.
- Jib fitted with 3 hooks to meet various needs of building sites.
- Adaptability for all yard handling applications.



	JH 16 T - 10 T - 7.5 T	JH 20 T - 14 T - 10 T	JH 13.5 T - 10 T - 7.5 T	P 9 T	P 25 T	P 36 T
Distance to center of gravity (in)	2' 8"	2' 8"	2' 8"	2' 4"	2' 11"	3' 1"
Capacity (lb)	35274	44092	29762	19842	55116	79366
Capacity 2 (lb)	22046	30865	22046	11023	39683	35274
Capacity 3 (lb)	16535	22046	16535	4409	28660	22046
Overall weight (lb)	1224	1301	1224	650	1962	3285
Maximum outreach (in)	2' 4"	2' 4"	2' 4"	1' 7"	2' 4"	3'
Maximum outreach 2 (in)	4' 5"	4' 5"	4' 5"	4' 7"	4' 1"	6' 7"
Maximum outreach 3 (in)	6' 7"	6' 7"	6' 7"	7' 7"	5' 11"	9' 10"
Overall length (in)	7' 3"	7' 3"	7' 3"	8' 3"	6' 10"	11'
Width (in)	2' 9"	2' 9"	2' 9"	2' 8"	2' 9"	3' 10"
Required machine equipment	✕	✕	✕	✕	✕	✕

Machines compatibility						
Reference number E-RECO	52701741	52701742	52701740	930830	53010431	52604320
MHT 790 Mining ST5	-	-	-	X	-	-
MHT 790 ST5	-	-	-	X	-	-
MHT 10135 ST5	-	-	X	-	-	-
MHT 10160 ST5	X	-	-	-	-	-
MHT 10200 ST5	-	X	-	-	-	-
MHT 11250 Mining ST5	-	-	-	-	X	-
MHT 11250 ST5	-	-	-	-	X	-
MHT 12330	-	-	-	-	X	X
MRT 2260 e	-	-	-	X	-	-
MRT 2570	-	-	-	X	-	-
MRT 2660 e	-	-	-	X	-	-
MRT 3570	-	-	-	X	-	-
MRT 3570 ES	-	-	-	X	-	-

MANDATORY MACHINE EQUIPMENT: ✕



BIG BAG HANDLER



- Max. total capacity of 4000 kg / 8820 lb with 4 loading points with 1000 kg / 2205 lb capacity each.
- 4 bag stoppers mounted on each loading point- limit the risk of bag falling.
- Anti-swing bag stabilizer, increases stability.
- Increases efficiency & safety of big bag handling.
- Main structure made of tubes- limits the risk of bag damages & fall.
- Elevated structure- prevents any damage of trailer's roof while loading.
- Handles indifferently big bags with 1, 2 or 4 ears.



	HBB 1500 / 2400	HBB 2100 / 4000
Distance to center of gravity (in)	1' 3"	1' 6"
Capacity (lb)	5291	8818
Overall weight (lb)	410	628
Overall height (in)	4' 4"	4' 4"
Overall length (in)	5' 5"	7' 2"
Forks spread (in)	2' 6"	2' 4"
Width (in)	4' 5"	4' 5"
Required machine equipment	×	×

Machines compatibility		
Reference number	52781808	52691660
Skid Steer Carriage reference	52578030	-
4 point Carriage		-
Euro Carriage		-
GCT 3-14	X	-
GCT 3-14 +	X	-
MLA-T 533-145 V+ - ST5	X	-
MLT 420-60 H	X	-
MLT 625-75 H	X	-
MLT 630-115 V CP	X	-
MLT 635-130 PS+	X	-
MLT 733-115 LSU	X	-
MLT 737-130 PS+	X	-
MLT 841-145 PS+	X	-
MLT 850-145 V+	X	X
MLT 961-160 V+ L	X	X
MLT 1041-145 PS+L	X	-
MT 420 H	X	-
MT 625 H	X	-
MT 625 H Comfort	X	-
MT 733 Easy OLD	X	-
MT 735 75D ST5	X	-
ULM 412 H	X	-
ULM 415 H	X	-
ULM 415 H	X	-
Reference number E-RECO	931627	-
MRT 1845 115	X	-
MRT 2145 115	X	-
MRT 2260	X	-
MRT 2260 e	X	-
MRT 2545 115	X	-
MRT 2570	X	-
MRT 2660	X	-
MRT 2660 e	X	-

HBB 1500 / 2400	HBB 2100 / 4000
-----------------	-----------------

Machines compatibility		
MRT 3060	X	-
MRT 3570	X	-
MRT 3570 ES	X	-

MANDATORY MACHINE EQUIPMENT: ✕



EXTENSION JIB



- Wide range of extension jibs from 600 kg / 1323 lb to 2000 kg / 4410 lb.
- Forward reach max from 2.5 m to 4 m / 13 ft.
- Safety: homologated swivel self locking hook.
- Extension jibs also available in winch version.
- Simple and light solution to handle suspended loads.
- Perfect for transporting and placing beams, frames and other light and bulky elements
- Its design allows to reach narrow areas and also improves the forward reach of the telehandler.
- Tubular structure designed for an optimal weight/rigidity ratio.

[The 3D picture at the top of this page is the reference P 600 - 921316].



	P 600	P 1000	P 1500	P 2000
Distance to center of gravity (in)	-	4' 6"	3' 2"	2' 8"
Capacity (lb)	1323	2205	3307	4409
Overall weight (lb)	463	463	364	419
Maximum outreach (in)	12' 3"	12' 5"	8' 9"	7' 8"
Overall height (in)	3' 3"	5' 1"	4' 1"	2' 8"
Overall length (in)	12' 11"	13' 6"	9' 8"	8' 2"
Width (in)	2' 9"	2' 8"	2' 8"	2' 8"
Required machine equipment	✕	✕	✕	✕

Machines compatibility				
Reference number	653228	-	-	-
MT 730 H	X	-	-	-
MT 733 Easy OLD	X	-	-	-
MT 735 75D ST5	X	-	-	-
MT 930 H	X	-	-	-
MT 1440 ST5	X	-	-	-
MT 1840 A 100D ST5 S1	X	-	-	-
MT 1840 ST5	X	-	-	-
Reference number E-RECO				
MRT 1845 115	X	X	X	X
MRT 2145 115	X	X	X	X
MRT 2260	X	X	X	X
MRT 2260 e	X	X	X	X
MRT 2545 115	X	X	X	X
MRT 2570	X	X	X	X
MRT 2660	X	X	X	X
MRT 2660 e	X	X	X	X
MRT 3060	X	X	X	X
MRT 3570	X	X	X	X
MRT 3570 ES	X	X	X	X

MANDATORY MACHINE EQUIPMENT: ✕





EXTENSION JIB WITH WINCH



- Wide range of crane with winch from 600 kg / 1323 lb to 2000 kg / 4410 lb with a forward reach max. from 4 m / 13 ft to 2.5 m / 8 ft.
- Oil immersed negative brakes.
- Safety: homologated swivel self locking hook.
- Limit switch sensor (up and down).

[The 3D picture at the top of this page is the reference PT 1000 - 921326].

- Handling solution for suspended loads for all type of building sites.
- Turn your telehandler into a crane.
- Perfect for transporting and placing beams, frames and other suspended loads.
- Improves the forward reach of the telehandler.
- Its winch allows to gain greater flexibility while keeping an important forward reach.
- Tubular structure designed for an optimal weight/rigidity ratio.



	JW 1950 LB	JW 2500 / 2000 35M	JW 3000 / 1500 44M	JW 4100 / 600 68M	JW 4100 / 1000 34M
Distance to center of gravity (in)	3' 9"	2' 11"	3' 2"	3' 10"	3' 10"
Working height (in)	88' 7"	78' 9"	114' 10"	124' 8"	88' 7"
Capacity (lb)	1949	4409	3307	1323	2205
Overall weight (lb)	842	882	811	207	659
Maximum outreach (in)	11' 7"	6' 7"	8' 8"	12' 2"	11' 7"
Overall length (in)	13' 6"	8' 3"	9' 10"	13' 6"	13' 6"
Cable loop	1	1	Direct	Direct	1
Width (in)	2' 8"	2' 8"	2' 8"	2' 8"	2' 8"
Cable length (in)	183' 9"	229' 8"	121' 5"	131' 3"	183' 9"
Required machine equipment	  + 	  + 	  + 	  + 	  + 
Hook Speed (m/mn)	44	24	48	94	44

Machines compatibility					
Reference number E-RECO		52717582	52717710		
MRT 1845 115	-	X	X	X	X
MRT 2145 115	-	X	X	X	X
MRT 2260	X	X	X	X	X
MRT 2260 e	X	X	X	X	X
MRT 2545 115	-	X	X	X	X
MRT 2570	X	X	X	X	X
MRT 2660	X	X	X	X	X
MRT 2660 e	X	X	X	X	X
MRT 3060	X	X	X	X	X
MRT 3570	X	X	X	X	X
MRT 3570 ES	X	X	X	X	X

MANDATORY MACHINE EQUIPMENT:   + 


	PT 600	PT 1000	PT 1500	PT 2000 (a)	PT 2000 (b)
Distance to center of gravity (in)	3' 8"	3' 8"	3'	2' 10"	2' 10"
Working height (in)	124' 8"	88' 7"	114' 10"	78' 9"	78' 9"
Capacity (lb)	1323	2205	3307	4409	4409
Overall weight (lb)	613	659	816	858	882
Maximum outreach (in)	13' 6"	13' 6"	8' 8"	6' 7"	6' 7"
Overall length (in)	13' 6"	12' 11"	9' 6"	7' 10"	7' 10"
Cable loop	Direct	1	Direct	1	1
Width (in)	2' 8"	2' 8"	2' 8"	2' 8"	2' 8"
Cable length (in)	131' 3"	183' 9"	121' 5"	160' 9"	229' 8"
Required machine equipment					
Hook Speed (m/mn)	94	44	48	24	24

Machines compatibility					
Reference number E-RECO	921325	921326	921330	921331	939392
MRT 1845 115	X	X	X	X	X
MRT 2145 115	X	X	X	X	X
MRT 2260	X	X	X	X	X
MRT 2545 115	X	X	X	X	X
MRT 2570	X	X	X	X	X
MRT 2660	X	X	X	X	X
MRT 3060	X	X	X	X	X
MRT 3570	X	X	X	X	X
MRT 3570 ES	X	X	X	X	X

MANDATORY MACHINE EQUIPMENT:  + 




FRAME MOUNTED HOOK

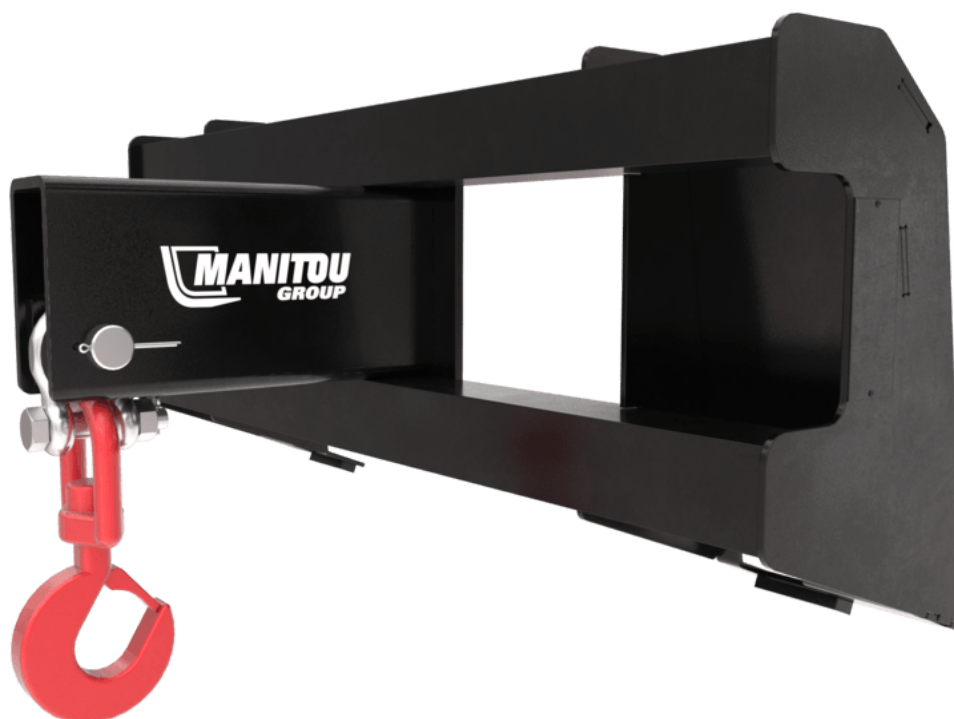

- Range from 4000 kg to 6000 kg capacity.
- Directly hitched on carriage.
- Safety: homologated swivel self locking hook.

[The 3D picture at the top of this page is the reference JH 2500 - 52579090]

- Simple and cost efficient solutions for suspended load handling.
- Very compact attachment that preserves machine stability.
- Perfect for transporting construction elements and other loads present in construction or industrial sites.



	JH 2500	PC 50	PC 60
Distance to center of gravity (in)	9"	7"	6"
Capacity (lb)	5512	11023	13228
Overall weight (lb)	187	254	265
Maximum outreach (in)	1' 8"	1' 7"	1' 7"
Overall height (in)	2'	1' 8"	1' 8"
Overall length (in)	2' 2"	2'	2'
Width (in)	2' 3"	2' 8"	2' 8"
Required machine equipment	×	×	×

Machines compatibility			
Reference number	-	708544	939050
All-Tach®		-	-
4 point Carriage		-	-
Euro Carriage		-	-
GCT 3-14	X	-	-
GCT 3-14 +	X	-	-
MLA-T 533-145 V+ - ST5	-	X	-
MLT 420-60 H	-	X	-
MLT 625-75 H	-	X	-
MLT 841-145 PS+	-	X	-
MLT 850-145 V+	-	X	-
MLT 961-160 V+ L	-	-	X
MLT 1041-145 PS+L	-	X	-
MT 420 H	-	X	-
MT 625 H	-	X	-
MT 625 H Comfort	-	X	-
MT 733 Easy OLD	-	X	-
MT 735 75D ST5	-	X	-
MT 1440 ST5	-	X	-
MT 1840 A 100D ST5 S1	-	X	-
MT 1840 ST5	-	X	-
ULM 412 H	X	-	-
ULM 415 H	X	-	-
ULM 415 H	X	-	-
Reference number E-RECO	-	921335	939050
MRT 1845 115	-	X	X
MRT 2145 115	-	X	X
MRT 2260	-	X	X
MRT 2260 e	-	X	X
MRT 2545 115	-	X	X
MRT 2570	-	X	X
MRT 2660	-	X	X
MRT 2660 e	-	X	X
MRT 3060	-	X	X

JH 2500	PC 50	PC 60
---------	-------	-------

Machines compatibility			
MRT 3570	-	X	X
MRT 3570 ES	-	X	X

MANDATORY MACHINE EQUIPMENT: ✕



HEAVY DUTY FRAME MOUNTED HOOK



- Suspended load capacity up to 25000 kg / 55125 lb.
- Safety: Homologated swivel self locking hook.

[The 3D picture at the top of this page is the reference PC 9 T - 939970].

- Efficient and heavy duty suspended load solution.
- Directly hitched on carriage for secured application.
- Very compact attachment that preserves machine stability.


	JH 16000	JH 20000	PC 9 T	PC 25 T
Distance to center of gravity (in)	1' 3"	1' 4"	7"	1' 4"
Capacity (lb)	35274	44092	19842	55116
Overall weight (lb)	750	783	284	1014
Maximum outreach (in)	2' 4"	2' 4"	10"	2' 4"
Overall height (in)	3' 6"	4'	3' 2"	4' 2"
Overall length (in)	3' 1"	3' 1"	1' 5"	3' 3"
Width (in)	2' 9"	2' 9"	2' 8"	2' 9"
Required machine equipment	×	×	×	×

Machines compatibility				
Reference number E-RECO	52702450	52702460	939970	53008289
MHT 790 Mining ST5	-	-	X	-
MHT 790 ST5	-	-	X	-
MHT 10135 ST5	X	-	-	-
MHT 10160 ST5	X	-	-	-
MHT 10200 ST5	-	X	-	-
MHT 11250 Mining ST5	-	-	-	X
MHT 11250 ST5	-	-	-	X
MHT 12330	-	-	-	X
MRT 2260	-	-	X	-
MRT 2260 e	-	-	X	-
MRT 2570	-	-	X	-
MRT 2660	-	-	X	-
MRT 2660 e	-	-	X	-
MRT 3060	-	-	X	-
MRT 3570	-	-	X	-
MRT 3570 ES	-	-	X	-

MANDATORY MACHINE EQUIPMENT: ×



EXTENSIBLE PLATFORM

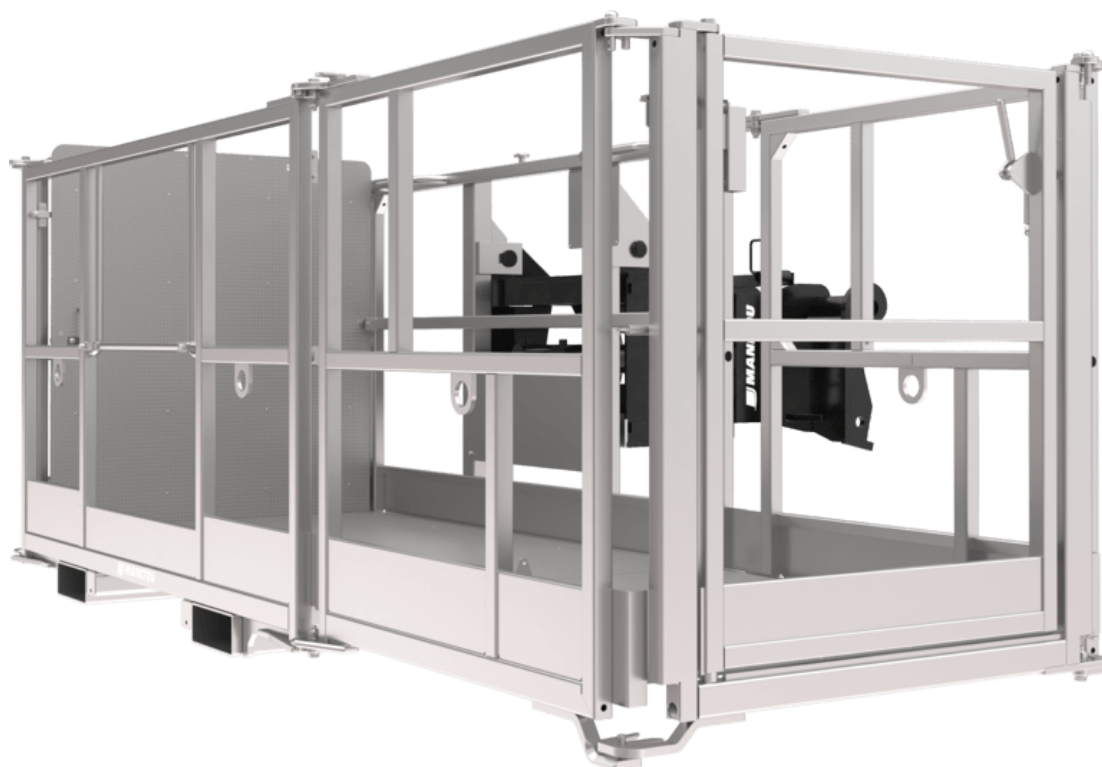

- Capacity from 365 kg / 805 lb to 1000 kg / 2205 lb.
- Slewing platform +/- 90° on both sides.
- Legally approved for 3 persons.
- Accessible from 3 sides.
- Overload sensor.
- Flexibility for people lifting applications.
- 2 different working widths available.
- Heavy duty and galvanized structure for an improved longevity.
- Non-slip metal floor.
- Expandable sides are independent.
- Fork sleeves for yard handling.

	PSE 5000 / 365 D 3P	PSE 5000 / 1000 D 3P	PSE 6000 / 365 D 3P
Capacity including people (lb)	805	2205	805
Number of people	3	3	3
Distance to center of gravity (in)	3' 7"	3' 9"	4' 1"
Overall weight (lb)	2249	2249	2403
Overall height (in)	5' 4"	5' 4"	5' 5"
Overall length (in)	7' 7"	7' 7"	7' 6"
Width minimum (in)	8'	8'	8'
Width maximum (in)	16' 5"	16' 5"	19' 8"
Depth (in)	3' 8"	3' 8"	3' 8"
Required machine equipment			
Rotation 1 (°)	90	90	90
Rotation 2 (°)	90	90	90


Machines compatibility			
Reference number E-RECO			
MRT 1845 115	-	X	X
MRT 2145 115	-	X	X
MRT 2260	-	X	X
MRT 2260 e	-	X	X
MRT 2545 115	-	X	X
MRT 2570	-	X	X
MRT 2660	-	X	X
MRT 2660 e	-	X	X
MRT 3060	-	X	X
MRT 3570	-	X	X
MRT 3570 ES	-	X	X
Reference number E-RECO 2	-	52719670	-
MRT 1845 115	-	X	-
MRT 2145 115	-	X	-
MRT 2260	-	X	-
MRT 2260 e	-	X	-
MRT 2545 115	-	X	-
MRT 2570	-	X	-
MRT 2660	-	X	-
MRT 2660 e	-	X	-
MRT 3060	-	X	-
MRT 3570	-	X	-
MRT 3570 ES	-	X	-

MANDATORY MACHINE EQUIPMENT:

 + 



FAST OPENING PLATFORM

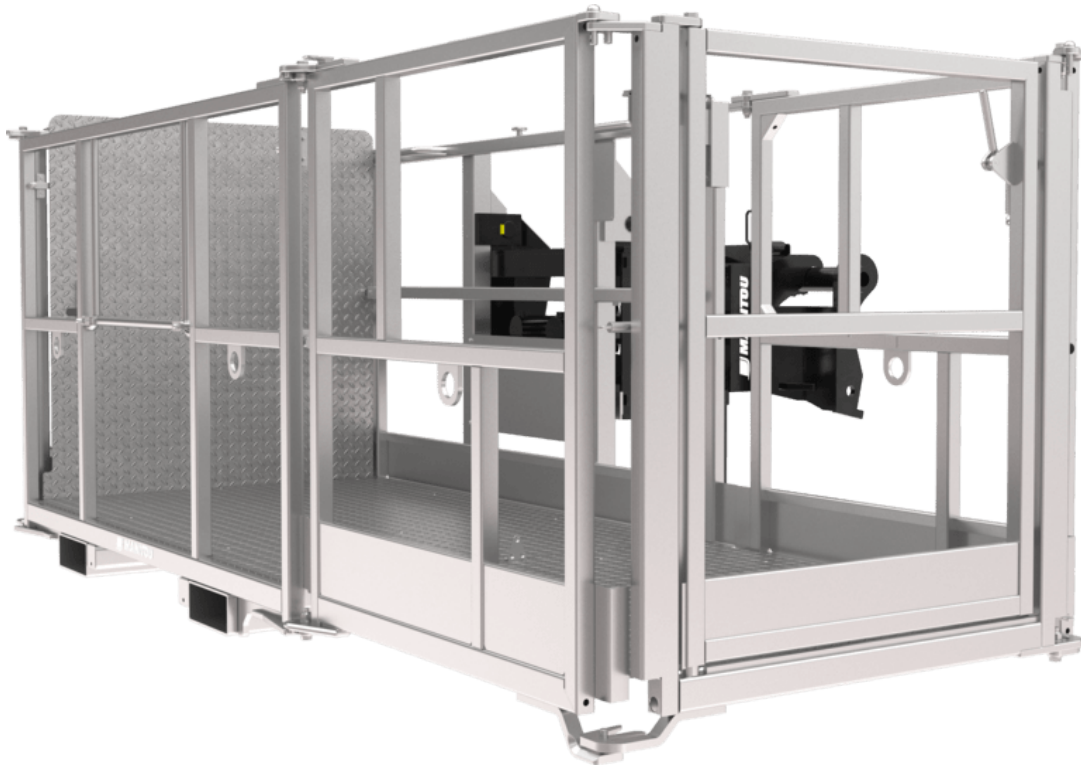

- Capacity 365/1000/700 kg / 805/2205/1544 lb including 3 people.
- Unfolded working width 4,4 m / 14 ft
- Slewing platform +/- 90° on both sides.
- Legally approved for 3 persons.
- Accessible from 3 sides (2x Side + 1 front).
- version "D": right access with side door.
- version "DD": front and right access with side door.
- Overload sensor.
- Fork sleeves: 238 mm x 100 mm / 9 in x 4 in.
- Flexibility on aerial working situations.
- User-friendly opening system, complete opening/closing within 50 seconds.
- Heavy duty, galvanized structure for an improved longevity.
- Non-slip metal floor.
- Expandable sides are independent.
- Fork sleeves for yard handling.



	PSE 4400 / 365 DD (MRT)	PSE 4400 / 700 D (MRT)	PSE 4400 / 1000 D (MHT)	PSE 4400 / 1000 D (MRT)
Capacity including people (lb)	805	1543	2205	2205
Number of people	3	3	3	3
Distance to center of gravity (in)	4' 6"	3' 11"	3' 11"	3' 11"
Overall weight (lb)	1521	2271	-	2271
Overall height (in)	4' 4"	4' 4"	3' 5"	4' 4"
Overall length (in)	7' 5"	7' 5"	7' 5"	7' 5"
Width minimum (in)	7' 6"	7' 6"	7' 6"	7' 6"
Width maximum (in)	14' 3"	14' 3"	14' 3"	14' 3"
Depth (in)	3' 9"	3' 9"	3' 9"	3' 9"
Required machine equipment				
Rotation 1 (°)	90	90	90	90
Rotation 2 (°)	90	90	90	90

Machines compatibility				
Reference number E-RECO				
MHT 10135 ST5	-	-	X	-
MHT 10160 ST5	-	-	X	-
MHT 10200 ST5	-	-	X	-
MHT 11250 Mining ST5	-	-	X	-
MHT 11250 ST5	-	-	X	-
MRT 1845 115	X	X	-	X
MRT 2145 115	X	X	-	X
MRT 2260	X	X	-	X
MRT 2260 e	X	X	-	X
MRT 2545 115	X	X	-	X
MRT 2570	X	X	-	X
MRT 2660	X	X	-	X
MRT 2660 e	X	X	-	X
MRT 3060	X	X	-	X
MRT 3570	X	X	-	X
MRT 3570 ES	X	X	-	X
Reference number E-RECO 2	-	52719668	52747068	52719669
MHT 10135 ST5	-	-	X	-
MHT 10160 ST5	-	-	X	-
MHT 10200 ST5	-	-	X	-
MHT 11250 Mining ST5	-	-	X	-
MHT 11250 ST5	-	-	X	-
MRT 1845 115	-	X	-	X
MRT 2145 115	-	X	-	X
MRT 2260	-	X	-	X
MRT 2260 e	-	X	-	X
MRT 2545 115	-	X	-	X
MRT 2570	-	X	-	X

PSE 4400 / 365 DD (MRT)	PSE 4400 / 700 D (MRT)	PSE 4400 / 1000 D (MHT)	PSE 4400 / 1000 D (MRT)
-------------------------	------------------------	-------------------------	-------------------------

Machines compatibility				
MRT 2660	-	X	-	X
MRT 2660 e	-	X	-	X
MRT 3060	-	X	-	X
MRT 3570	-	X	-	X
MRT 3570 ES	-	X	-	X

MANDATORY MACHINE EQUIPMENT:

 + 



SWEEPER 2 IN 1



- Protected hydraulic system, no hydraulic backline required.
- Synchronisation valve: sweep and control the dirt tank with 1 single hydraulic function.
- Galvanized structure for more longevity.
- Synthetic brush ø520 mm / 20 in.
- Optional side brush ø320 mm / 13 in.
- Standard version: standard wheel, mechanical swivel.
- "+" version: reinforced wheels, mechanical swivel.
- "HWA +" version: reinforced wheels, hydraulic swivel, water sprayer (120 L / 4 ft³).
- MLA, MRT limitation : External temperature < 33°C / 91,4°F | usage <2 hours a day.
- Simple & efficient solution for all light and medium duty applications.
- Dust collector & front wheel standard.
- 2 in 1: sweeper-collector & side-pushing sweeper.
- Fast, toolless switching from one configuration to the other.



	SCC 2050	SCC 2050 +	SCC 2050 HWA +	SCC 2600	SCC 2600 +	SCC 2600 HWA +
Overall weight (lb)	1389	1411	1521	1664	1609	1764
Overall height (in)	3' 1"	3' 1"	5' 1"	3' 1"	3' 1"	5' 1"
Overall length (in)	7'	7' 1"	7' 1"	7'	7' 1"	7' 1"
Width (in)	7' 5"	7' 5"	7' 5"	9' 3"	9' 3"	9' 3"
Required machine equipment						
Rotation 1 (°)	30	30	30	30	30	30
Water sprayer and hydraulic swivel	No	No	Yes	No	No	Yes

Machines compatibility						
Reference number					52000517	
MHT 790 Mining ST5	-	-	-	-	X	-
MHT 790 ST5	-	-	-	-	X	-
MLA-T 533-145 V+ - ST5	-	X	-	X	X	X
MLT 420-60 H	X	X	X	-	-	-
MLT 625-75 H	X	X	X	-	-	-
MLT 635-130 PS+	-	-	-	X	X	X
MLT 841-145 PS+	-	-	-	X	X	X
MLT 850-145 V+	-	-	-	X	X	X
MLT 961-160 V+ L	-	-	-	X	-	X
MLT 1041-145 PS+L	-	-	-	X	X	X
MRT 1845 115	-	-	-	-	X	-
MRT 2145 115	-	-	-	-	X	-
MRT 2545 115	-	-	-	-	X	-
MT 420 H	X	X	X	-	-	-
MT 625 H	X	X	X	-	-	-
MT 625 H Comfort	X	X	X	-	-	-
MT 733 Easy OLD	-	X	X	X	X	-
MT 735 75D ST5	-	-	-	X	X	X

MANDATORY MACHINE EQUIPMENT: 



HYDRAULIC WINCH



- Hydraulic motor + end of cable automatic movement stop.
- Oil immersed negative brake.
- Double or quadruple line pull (according to type).
- Homologated swivel self locking hook.
- Winch storage stand with sleeves for fork handling.
- Note: dimensions below are given for winch placed on its stands.
- MRT Vision+ : Significant hook speed increase through machine/attachment cooperation improvement.

- Turns your telehandler into a crane.
- Extremely fast implementation on the MANITOU carriage.
- Easy steering from the cab or with the machine's remote control (optional).
- Fast and accurate movements.

[The 3D picture at the top of this page is the reference Winch 5T - 921341].



	W 3000 / 36M	W 3000 DI / 46M	W 6000 / 32M	Winch 3T	Winch 3T TD	Winch 5T
Distance to center of gravity (in)	1' 1"	1' 1"	1' 2"	1' 1"	1' 1"	1' 2"
Working height (in)	118' 1"	150' 11"	105'	78' 9"	150' 11"	78' 9"
Capacity (lb)	6614	6614	13228	6614	6614	11023
Overall weight (lb)	672	1080	968	683	882	926
Maximum outreach (in)	1' 8"	2' 3"	1' 9"	1' 8"	2' 3"	1' 9"
Overall height (in)	5' 11"	5' 11"	5' 11"	6' 2"	6' 2"	6' 2"
Overall length (in)	2' 11"	2' 11"	2' 11"	2' 11"	2' 11"	2' 11"
Cable loop	1	Direct	1	1	Direct	1
Width (in)	3' 7"	3' 7"	3' 7"	3' 7"	3' 7"	3' 7"
Depth (in)	2' 6"	2' 9"	2' 9"	2' 6"	2' 9"	2' 9"
Cable length (in)	246' 1"	157' 6"	219' 10"	160' 9"	160' 9"	173' 11"
Required machine equipment	  	  	  	  	  	  
Hook Speed (m/mn)	27	35	17	15	30	14

Machines compatibility						
Reference number	-	-	-	885236	-	-
MT 735 75D ST5	-	-	-	X	-	-
Reference number E-RECO						921341
MRT 1845 115	X	X	X	X	X	X
MRT 2145 115	X	X	X	X	X	X
MRT 2260	X	X	X	X	X	X
MRT 2260 e	X	X	X	X	X	X
MRT 2545 115	X	X	X	X	X	X
MRT 2570	X	X	X	X	X	X
MRT 2660	X	X	X	X	X	X
MRT 2660 e	X	X	X	X	X	X
MRT 3060	X	X	X	X	X	X
MRT 3570	X	X	X	X	X	X
MRT 3570 ES	X	X	X	X	X	X

MANDATORY MACHINE EQUIPMENT:   + 



VARIOWINCH



- Hydraulic motor + end of cable automatic movement stop.
- Oil immersed negative break.
- Patented variable speed concept.
- Autonomous, 100% hydraulic speed adaptation to load.
- Homologated swivel self locking hook.
- Winch storage stand with sleeves for yard handling.
- Note: dimensions below are given for winch placed on its stands ; working weight: 700 kg / 1544 lb.
- MRT Vision+ : significant hook speed increase through machine/attachment cooperation improvement.
- Limited capacity for MRT 3050.
- Turns your telehandler into a crane.
- 4x faster than a standard Manitou 5 t / 11025 lb winch / 3x faster than a 3 t / 6615 lb one.
- Speed is continuously adapted to the load & operator's speed requirement.
- Max. speed 60 m/min / 197 ft/min (MRT 3255, no load, lifting).
- Easy steering from the cab or with the machine's remote control (optional).

[The 3D picture at the top of this page is the reference VARIOWINCH 7.2 t - 52576737].



	W 7200 V
Working height (in)	118' 1"
Capacity (lb)	15873
Overall weight (lb)	1543
Maximum outreach (in)	9"
Overall height (in)	7' 11"
Overall length (in)	3' 11"
Cable loop	1
Width (in)	4'
Depth (in)	2' 1"
Cable length (in)	249' 4"
Required machine equipment	  +  
Hook Speed (m/mn)	60.60

Machines compatibility	
Reference number E-RECO	52735674
MRT 2260	X
MRT 2260 e	X
MRT 2570	X
MRT 2660	X
MRT 2660 e	X
MRT 3060	X
MRT 3570	X
MRT 3570 ES	X

MANDATORY MACHINE EQUIPMENT:   +  



CYLINDER HANDLER



- For cylinders with diameter from 0 mm to 630 mm / 25 in.
- Maximum capacity up to 10500 kg / 23153 lb.
- Cylinder holding with cables (CH 4) or clamps (CH 10).
- Hydraulic movements: body rotation, side shift.
- CH4: Body rotation 22.5°, side shift 150 mm / 6 in, hydraulic telescopic extension, hydraulic side body tilt 15°/15°, head rotation 35°.
- CH10: body rotation 340°, head vertical tilt 90°.
- CH10: clamping pressure alarm & pressure gauge on each front & side.
- Clamp reduction pads for smaller cylinders.

[The 3D picture at the top of this page is the reference CH10 - 939239].

- Efficient & safe cylinder handling solutions.
- Faster, safer maintenance leading to less production losses.
- Robust conception designed for mining sites conditions.
- Safety & Productivity: smooth and accurate cylinder catching and positioning.
- Permanent cylinder grip: no suspended load, no risk of sudden slippage or fall.
- As functional as a human wrist.



	CH 4	CH 10
Capacity (lb)	8818	23149
Overall weight (lb)	4079	7496
Maximum outreach (in)	7' 3"	8' 2"
Overall height (in)	4' 6"	3' 11"
Overall length (in)	7' 5"	8' 3"
Width (in)	4' 10"	5' 10"
Minimum diameter / Maximum diameter (in)	10" / 1' 9"	9" / 2' 1"
Required machine equipment		
Rotation 1 (°)	22.50	340
Rotation 2 (°)	35	90

Machines compatibility		
Reference number E-RECO		939239
MHT 790 Mining ST5	X	-
MHT 790 ST5	X	-
MHT 10135 ST5	X	X
MHT 10160 ST5	X	X
MHT 10200 ST5	X	X
MHT 11250 Mining ST5	X	X
MHT 11250 ST5	X	X
MHT 12330	X	X



PIPE HANDLER



- Maximum capacity 14000 kg / 30865 lbs.
- Max. pipe diameter 1016 mm / 40".
- Increased component protection for less downtimes.
- Complete grapple opening, increased efficiency when loading palletized loads.
- Rubber-covered tine pads.
- Fork dimensions: 120 x 240 x 2400 mm / 4.7 x 9.4 x 94.5".
- Thinner forks (90 mm / 4 in) available upon request.
- Forks can be used in floating or fixed mode.
- Increases working safety & output on all pipe-handling applications.
- Perfect upholding of pipes thanks to its mobile grapple with hydraulic tine pads- increased safety on rough terrain.
- "Appendix" at the end of the grapple, ensures complete closing & prevents the pipes from sliding away.
- Separated control of grapple & tine pads for more accuracy.
- Increased polyvalence: can be used to handle other loads.

[The 3D picture at the top of this page is the reference PH 2100 / 8000 - 939231].



	PH 2100 / 8000	PH 2500 / 14000
Distance to center of gravity (in)	1' 11"	2' 11"
Capacity (lb)	17637	30865
Overall weight (lb)	4850	8378
Overall length (in)	7'	10' 2"
Forks section X Forks width X Forks length (in)	3" X 10" X 3' 11"	5" X 9" X 7' 10"
Width (in)	6' 11"	8'
Closed grapple height (in)	4' 7"	6' 9"
Opened grapple height (in)	10' 9"	15' 5"
Minimum diameter / Maximum diameter (in)	3" / 2' 9"	3" / 3' 4"
Required machine equipment		

Machines compatibility		
Reference number E-RECO	939231	
MHT 790 Mining ST5	X	-
MHT 790 ST5	X	-
MHT 10135 ST5	X	-
MHT 10160 ST5	X	-
MHT 10200 ST5	X	X
MHT 11250 Mining ST5	X	X
MHT 11250 ST5	-	X
MHT 12330	X	X

MANDATORY MACHINE EQUIPMENT: 



NEW

GRAIN PUSHER



- Heavy duty design with round surfaces to prevent grain trapping.
- Polyurethane cutting edge to protect surfaces that could be damaged by the attachment.

[The 3D picture at the top of this page is the reference BLGP 2320 / 3900 - 52812920].

- Must have attachment to push the grain.
- Facility space saving.
- Time saving for the operator.

	BLGP 2320 / 3900
Overall weight (lb)	968
Overall height (in)	3' 1"
Overall length (in)	12' 11"
Width (in)	7' 7"


Machines compatibility	
Reference number	52812920
MLT 635-130 PS+	X
MLT 733-115 LSU	X
MLT 737-130 PS+	X
MLT 741-140 V+	X
MLT 841-145 PS+	X
MLT 850-145 V+	X

MANDATORY MACHINE EQUIPMENT: ✕



NEW

PRUNING GRAPPLE SAW

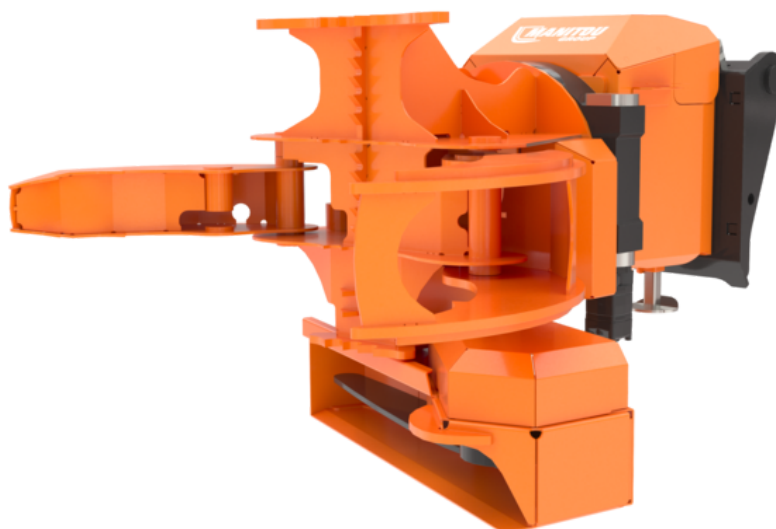

- Only one double-acting hydraulic valve required.
- Platform predisposition required.
- Made of high-strength Hardox® steel.
- Robust technology, low wear and low maintenance.
- Powerful rotation - the attachment swivels infinitely to adapt perfectly to the tree.
- Powerful gripper for secure hold of harvested trunks and branches.

- Used for safe tree felling.
- Can cut branches up to 750 mm / 30 in in diameter.
- Chain lubricated with grease as it stays on the chain much longer.
- Suspension on saw to prevent bending when cutting trees.

[The 3D picture at the top of this page is the reference PRGRS 750 - 52810813].



	PRGSA 750
Distance to center of gravity (in)	2' 7"
Capacity (lb)	7937
Overall weight (lb)	2337
Overall height (in)	3' 11"
Overall length (in)	6' 6"
Width (in)	4' 11"
Maximum diameter (in)	2' 6"
Required machine equipment	 +  +  + 
Hydraulic system	Yes

Machines compatibility	
Reference number E-RECO	52810813
MRT 2260	X
MRT 2260 e	X
MRT 2570	X
MRT 2660	X
MRT 2660 e	X
MRT 3060	X

MANDATORY MACHINE EQUIPMENT:  +  +  + 



E-Reco, an attachment recognition system for greater simplicity.

Manitou is offering, as standard, the attachment recognition system on its new-generation of rotary telescopic trucks MRT.

The system uses RFID radio-identification technology, very widely used in industry and retail. This autonomous technique can remotely recover and record data. The machine detects the attachment at the head of the boom, analyses its data and directly proposes the corresponding working configuration (working envelope + movement speed + safety).

This technology provides the load chart in real time, taking into account the rotation angle of the turret and the position of the machine's stabilisers and in accordance with the mobile crane standard.

	No predisposition required
	Hydraulic line
	Return piping to hydraulic oil tank
	Electric predisposition
	Platform predisposition
	Tyre handler, cylinder handler predisposition
	Please contact your Manitou subsidiary (special solution request required)
	Suspended load : read user manual
	Machine equipped with attachment recognition system




Agriculture



Construction



Industry

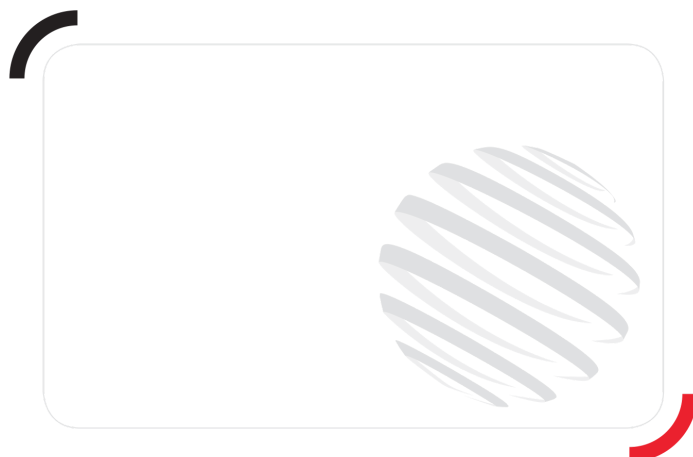

ATTACHMENTS



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes