



Palazzani TZX 730



FLORIDA'S AUTHORIZED PALAZZANI DISTRIBUTOR

Palazzani TZX 730



PERFORMANCE

- Maximum working height 73'9"
- Maximum side reach 33'7"
- Maximum basket weight load 440 lb
- Turret rotation range 360 degrees
- Basket rotation range 90 degrees
- Maximum slope to stabilize 19%
- Gradeability - max. travel angle/slope 23%
- Maximum crawler travel speed 1.82 fps
- Maximum crawler travel speed 1.24 mph



Non Marking Tracks

DIMENSIONS

- Basket height (inches) 43"
- Basket width (inches) 28"
- Basket length (inches) 55"
- Total length (feet and inches) 15'5"
- Height in transport position (inches) 6'6"
- Total width (without basket) (inches) 39"
- Total width (with basket) (inches) 55"
- Tracks (LxW) (inches x inches) 58" x 8"
- Outrigger spread length wide position 12'2"
- Outrigger spread width wide position 11'6"
- Outrigger spread length narrow position 14'6"
- Outrigger spread width narrow position 9'4"
- Outrigger foot diameter 10"



Outriggers + Pads

WEIGHT

- Total weight 5511 lbs
- Maximum outrigger foot pressure 4270 lbs
- Outrigger foot pressure 40.10 psf
- Track pressure 79.36 psf



Dual Power Options

POWER

- Diesel Power Kubota Z602-EF03
- Plug in Electric Power 110V/15A

Specifications are subject to change

© 2024+ Landscape Equipment Super Store, all rights reserved.

Palazzani TZX 730



Basket Control Panel



Basket Foot Pedal



Hose Connection



Wireless Remote




Basket Load Capacity



STRENX Steel

Palazzani TZX 730

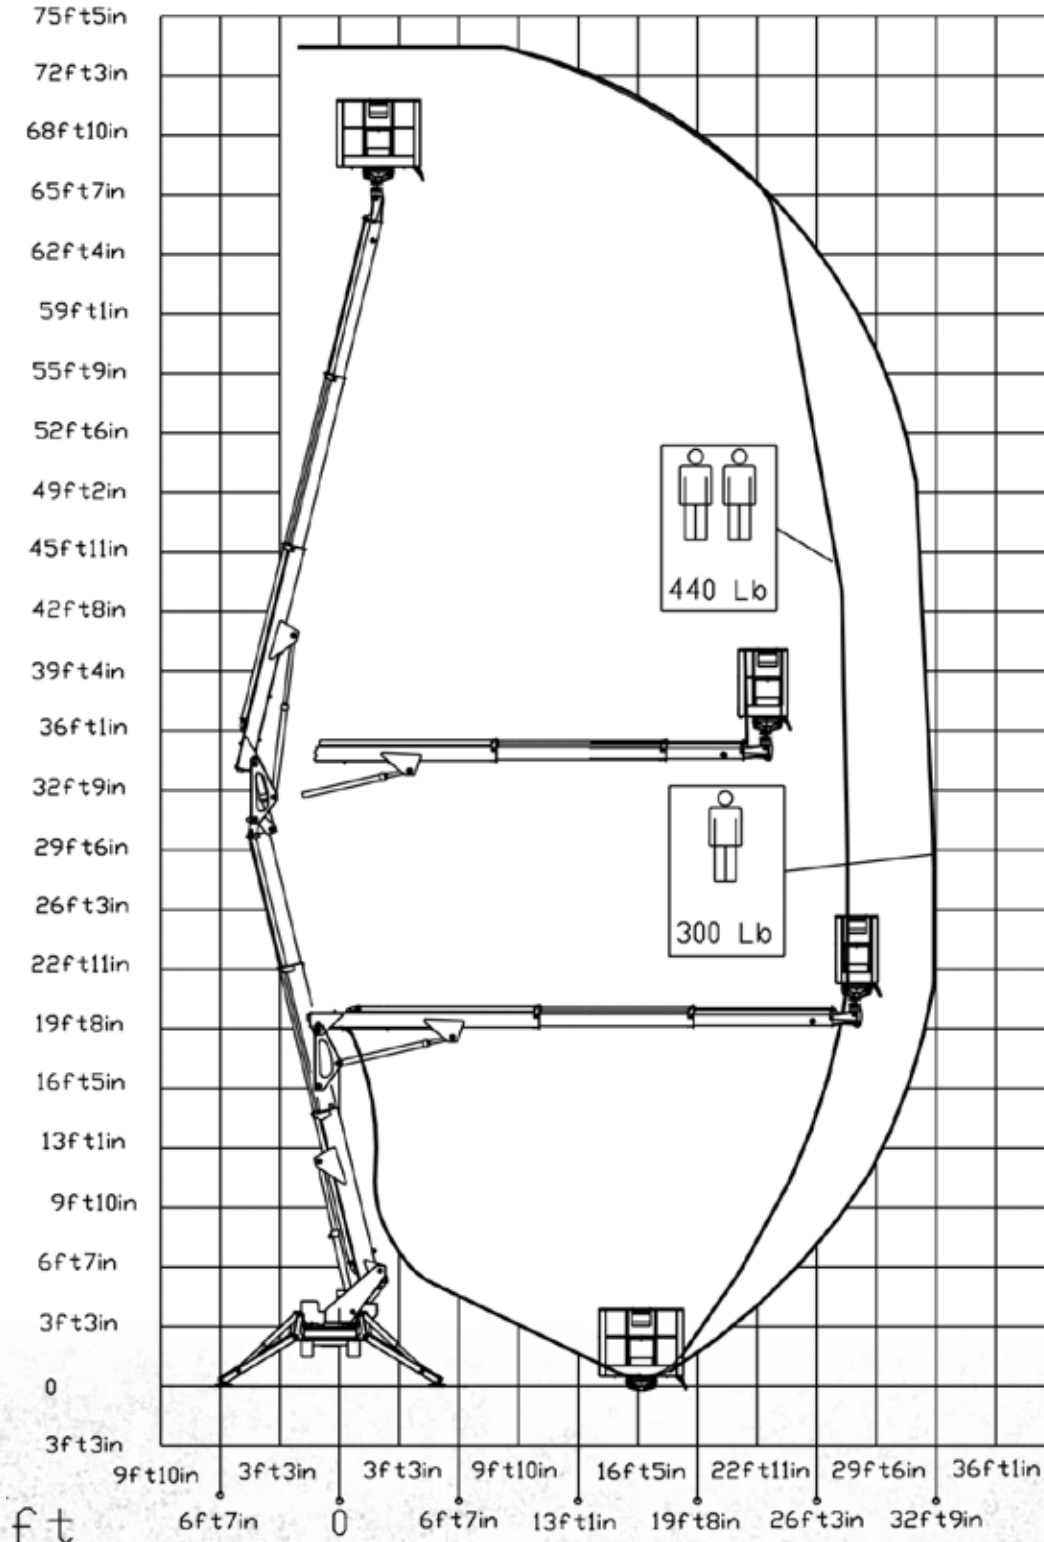

Palazzani TZX 730

