



Palazzani TZX 550



FLORIDA'S AUTHORIZED PALAZZANI DISTRIBUTOR

Palazzani TZX 550



PERFORMANCE

- Maximum working height 55'9"
- Maximum side reach 25'9"
- Maximum basket weight load 440 lb
- Turret rotation range 360 degrees
- Basket rotation range 90 degrees
- Maximum slope to stabilize 18%
- Gradeability - max. travel angle/slope 31%
- Maximum crawler travel speed 1.76 fps
- Maximum crawler travel speed 1.2 mph



Non Marking Tracks

DIMENSIONS

- Basket height (inches) 43"
- Basket width (inches) 28"
- Basket length (inches) 55"
- Total length (feet and inches) 14'8"
- Height in transport position (inches) 6'6"
- Total width (without basket) (inches) 39"
- Total width (with basket) (inches) 55"
- Tracks (LxW) (inches x inches) 58" x 8"
- Outrigger spread length in wide position 11'
- Outrigger spread width in wide position 10'5"
- Outrigger foot diameter 10"



Outriggers

WEIGHT

- Total weight 4409 lbs
- Maximum outrigger foot pressure 2921 lbs
- Outrigger foot pressure 39.06 psf
- Track pressure 66.83 psf



Dual Power Options

POWER

- Diesel Power Kubota Z602-EF03
- Plug in Electric Power 110V/15A

Palazzani TZX 550



Basket Control Panel



Basket Foot Pedal



Hose Connection



Wireless Remote




Basket Load Capacity



STRENX Steel

Palazzani TZX 550

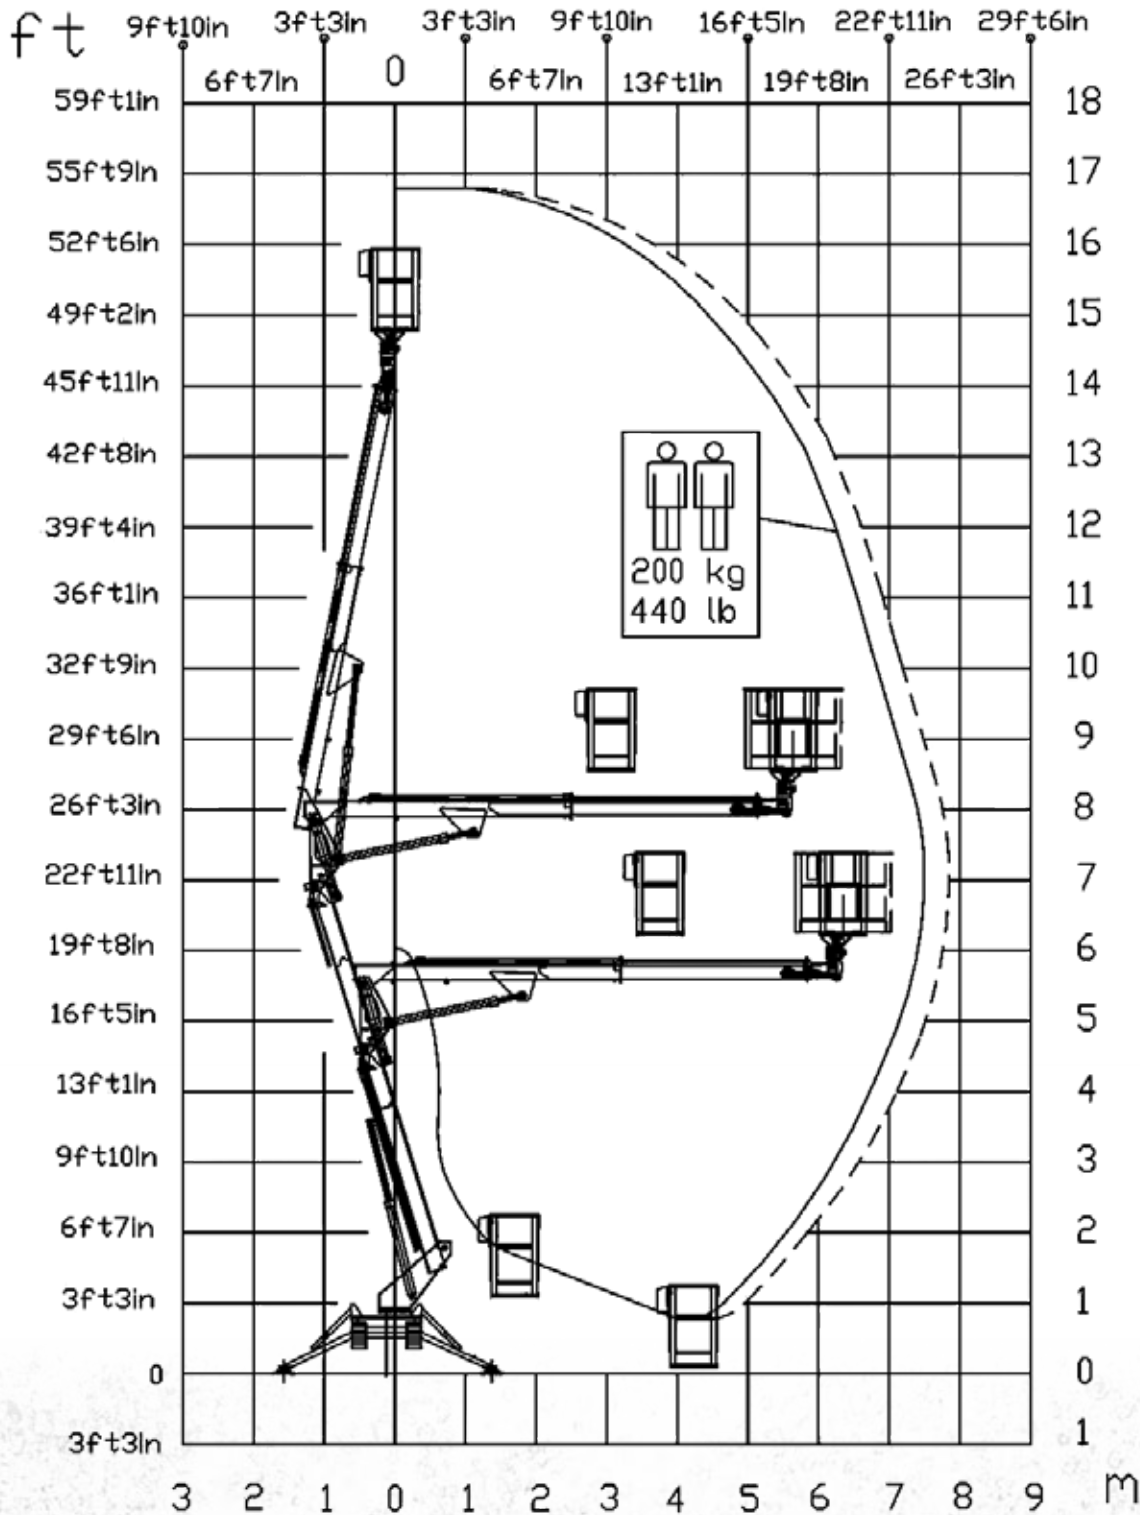

Palazzani TZX 550

