



Palazzani TZX 820



FLORIDA'S AUTHORIZED PALAZZANI DISTRIBUTOR

Palazzani TZX 820



PERFORMANCE

- Maximum working height 82'
- Maximum side reach 34'9"
- Maximum basket weight load 550 lb
- Turret rotation range 360 degrees
- Basket rotation range 90 degrees
- Maximum slope to stabilize 19%
- Gradeability - max. travel angle/slope 23%
- Maximum crawler travel speed 2.18 fps
- Maximum crawler travel speed 1.49 mph



Non Marking Tracks

DIMENSIONS

- Basket height (inches) 43"
- Basket width (inches) 28"
- Basket length (inches) 55"
- Total length (feet and inches) 16'10"
- Height in transport position (inches) 6'4"
- Total width (without basket) (inches) 39"
- Total width (with basket) (inches) 55"
- Tracks (LxW) (inches x inches) 58" x 8"
- Outrigger spread length wide position 12'2"
- Outrigger spread width wide position 11'6"
- Outrigger spread length narrow position 14'6"
- Outrigger spread width narrow position 9'4"
- Outrigger foot diameter 10"



Outriggers + Pads

WEIGHT

- Total weight 5864 lbs
- Maximum outrigger foot pressure 4299 lbs
- Outrigger foot pressure 41.90 psf
- Track pressure 76 psf



Dual Power Options

POWER

- Diesel Power Kubota Z602-EF03
- Plug in Electric Power 110V/15A

Specifications are subject to change

© 2024+ Landscape Equipment Super Store, all rights reserved.

Palazzani TZX 820



Basket Control Panel



Basket Foot Pedal



Hose Connection



Wireless Remote




550 lb Load Capacity



STRENX Steel

Palazzani TZX 820

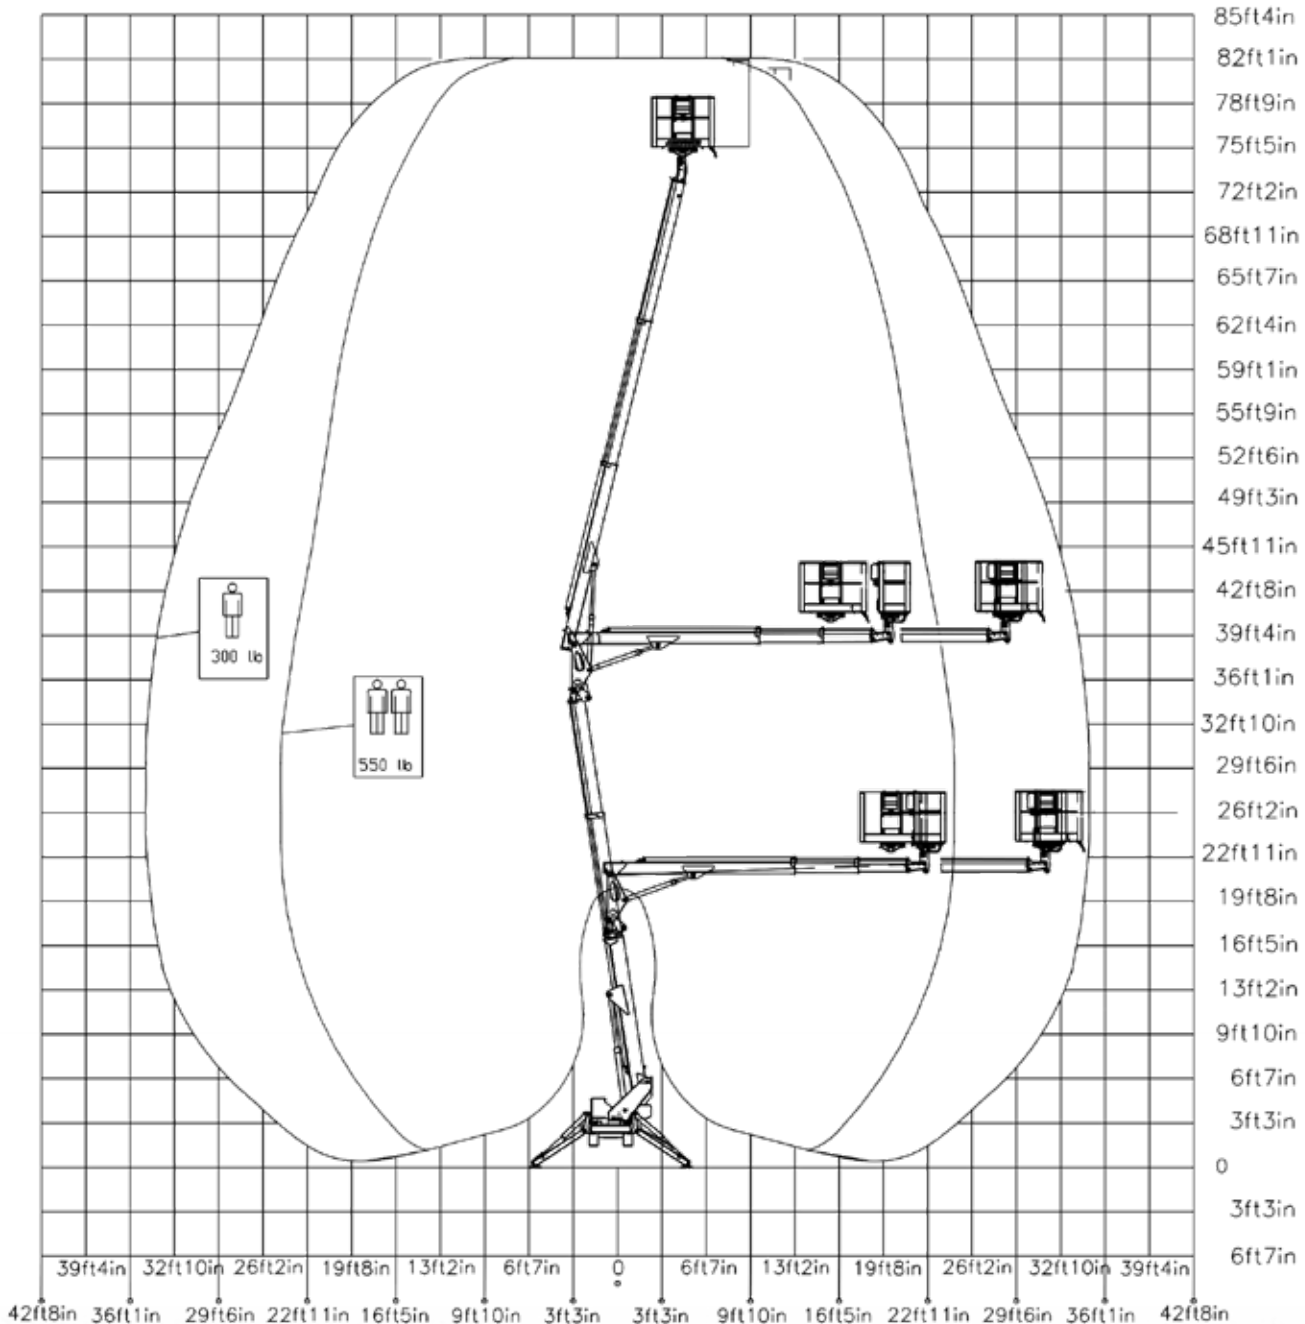

Palazzani TZX 820

